

内六角螺钉

矮圆柱头型




■矮圆柱头型



①代号	类型	[M] 材质	[S] 表面处理	强度等级
SWLAAB	矮圆柱头型	ML40Cr	发黑	12.9
SWLBAB		SUS304	—	A2-70
SWLDAB		一般结构钢	镀锌	8.8
SWLEAB		SUS316	—	A4-70

产品特点: 用于空间较小, 比较紧密, 受力不大的场合, 如电子机械设备等。

▲适用标准: DIN7984-2022

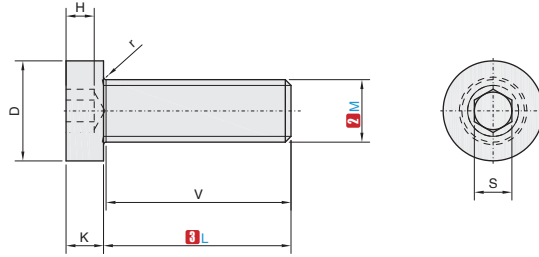

订购编号示例

①代号	-	② M	-	③ L
SWLAAB	-	M5	-	L10

型号		③ L										P 螺距	V	D (max)	K (max)	S	h	r (min)										
①代号	② M	3	4	5	6	8	10	12	14	16	20																	
(碳钢) SWLAAB SWLDAB	3											0.5	全牙	5.5	2	1.5	1.5	0.1										
	4			6	8	10	12	16	20			0.7		7	2.8	2.3	2.3	0.2										
	5				8	10	12	16	20	25		0.8		8.5	3.5	2.7	2.7	0.2										
	6					10	12	16	20	25	30	35		40	1.0	10	4	3	3	0.25								
	8						10	12	16	18	20	25		30	35	40	50	1.25	13	5	3.8	3.8	0.4					
	10							16	20	25	30	35		40	50	55		1.5	16	6	4.5	4.5	0.4					
	12								16	20	25	30		35	40	50	55	60	70	1.75	18	8	5	5	0.6			
	14										25	30		35	40	50		2.0	21	10	5.3	5.3	0.6					
	16											25		30	35	40	50	55	60	70	80	90	2.0	24	12	5.5	5.5	0.6
	20													30	35	40	50	60	70				2.5	30	14	7.5	7.5	0.8

型号		③ L										P 螺距	V	D (max)	K (max)	S	h	r (min)		
①代号	② M	2	2.5	3	4	5	6	8	10	12	14	16	20							
(不锈钢) SWLBAB SWLEAB	2													0.4	全牙	3.8	1.3	1.3	1	0.1
	2.5													0.45		4.5	1.6	1.5	1.3	0.1
	3													0.5		5.5	2	2	1.5	0.1
	4													0.7		7	2.8	2.5	2.3	0.2
	5													0.8		8.5	3.5	3	2.7	0.2
	6													1.0		10	4	4	3	0.25
	8													1.25		13	5	5	3.8	0.4
	10													1.5		16	6	7	4.5	0.4
	12													1.75		18	7	8	5	0.6
	20													2.5		30	14	7.5	7.5	0.8

F6
垫片 / 吊环
螺母