






标准加工

按图定制

①代号	②固定座		③外圈固定盖板		④外圈固定盖板用安装螺栓	
	M材质	M材质	S表面处理	M材质	S表面处理	
HARBZ	钢	一般结构用钢	四氧化三铁保护膜	碳钢	四氧化三铁保护膜	
HAREZ			无电解镀锌	不锈钢	-	

- ▲ 如对防锈有要求, 请优先选择无电解镀锌表面处理和铝合金材质产品。
- ▲ 由于产品批次不同, 发货镀锌产品可能存在喷细砂, 不影响尺寸及功能。
- ▲ 产品带有防锈油。

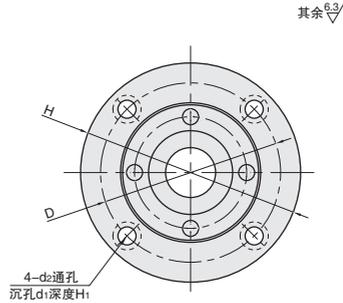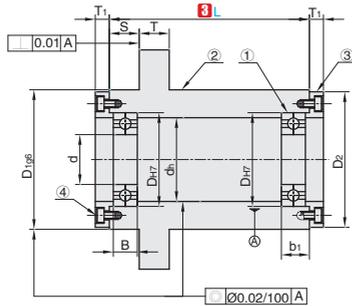

视角标准: 第一视角



①代号 - ②轴承型号 - ③长度L

HARBZ - 6002ZZ - L50

①代号	②轴承型号	③长度L			S	d	D _{H7}	H7公差	B	b ₁	H	D ₂	T	d _h	D ₁₉₆	g6公差	D	d ₁	d ₂	H ₁	T ₁	
HARBZ HAREZ	6902ZZ	40	60	80	10	15	28	+0.021 0	7	9	70	43	12	25	45	-0.009 -0.025	57	11	6.6	6.5	6	
	6002ZZ	50	70	90			32	+0.025 0	9	11	75	48		28	50		62					
	6903ZZ	50	70	90			30	+0.021 0	7	9	70	43		27	45		57					
	6003ZZ	60	80	100	20	37	42	+0.025 0	10	12	75	48	31	50	62	70	14	9	8.5	7		
	6904ZZ	60	80	100					9	11	87	53	34	55	75							
	6004ZZ	70	100	15	25	47	30	55	12	14	92	58	15	36	60	-0.010 -0.029	75	17.5	11	10.5	8	
	6005ZZ	70	100											41	65		80					
	6006ZZ	70	100											48	80		100					
	6007ZZ	80	100	20	40	68	35	62	+0.030 0	13	15	120	78	18	48	80	100	106	17.5	11	10.5	9
	6008ZZ	80	100							14	16	126	84	18	55	86	-0.012 -0.034					

▲ 爱安特不承诺轴承的品牌。

