


HALFEN HIT INSULATED CONNECTION

TECHNICAL PRODUCT INFORMATION

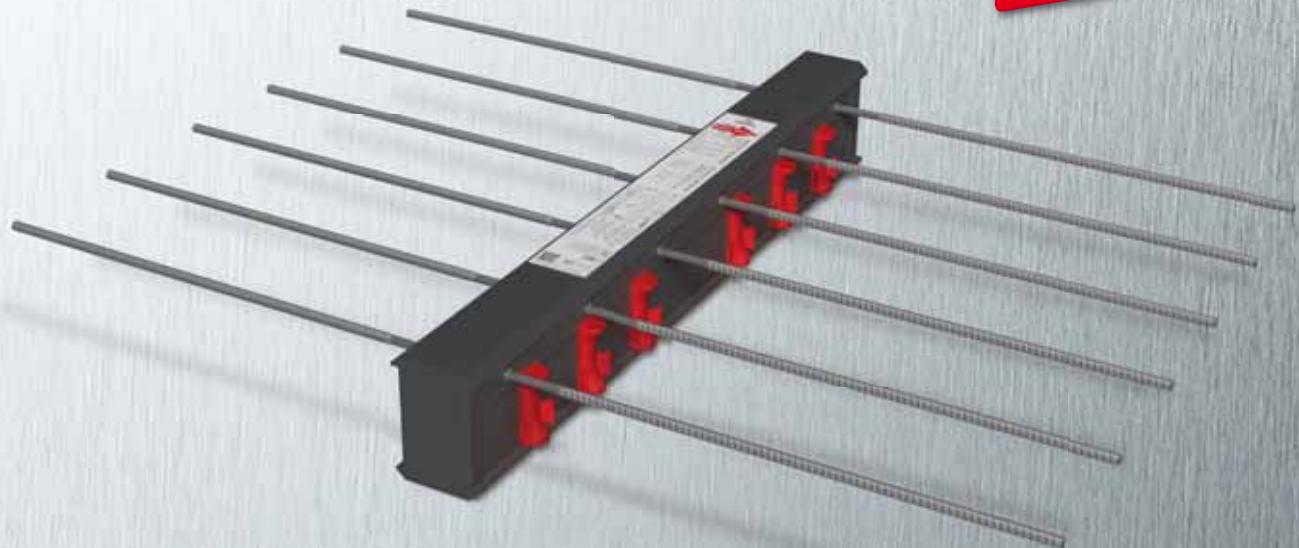

NEW! HALFEN HIT –
symmetrical, insulated
connections for
cantilevered balconies!

HALFEN HIT INSULATED CONNECTION

HIT 16.1-E

CONCRETE


NEW!

- the complete product range for balcony solutions
- with European Technical Approval
- symmetrical HIT units with optimized CSB as standard



Back to front or front to back: the new HIT-MVX is unique!

The mirrored-shape of the compression shear bearings results in a symmetrical design of the HIT Units for cantilever balconies. These bidirectional units can be installed independently of the main slab or balcony orientation; this prevents installation errors.

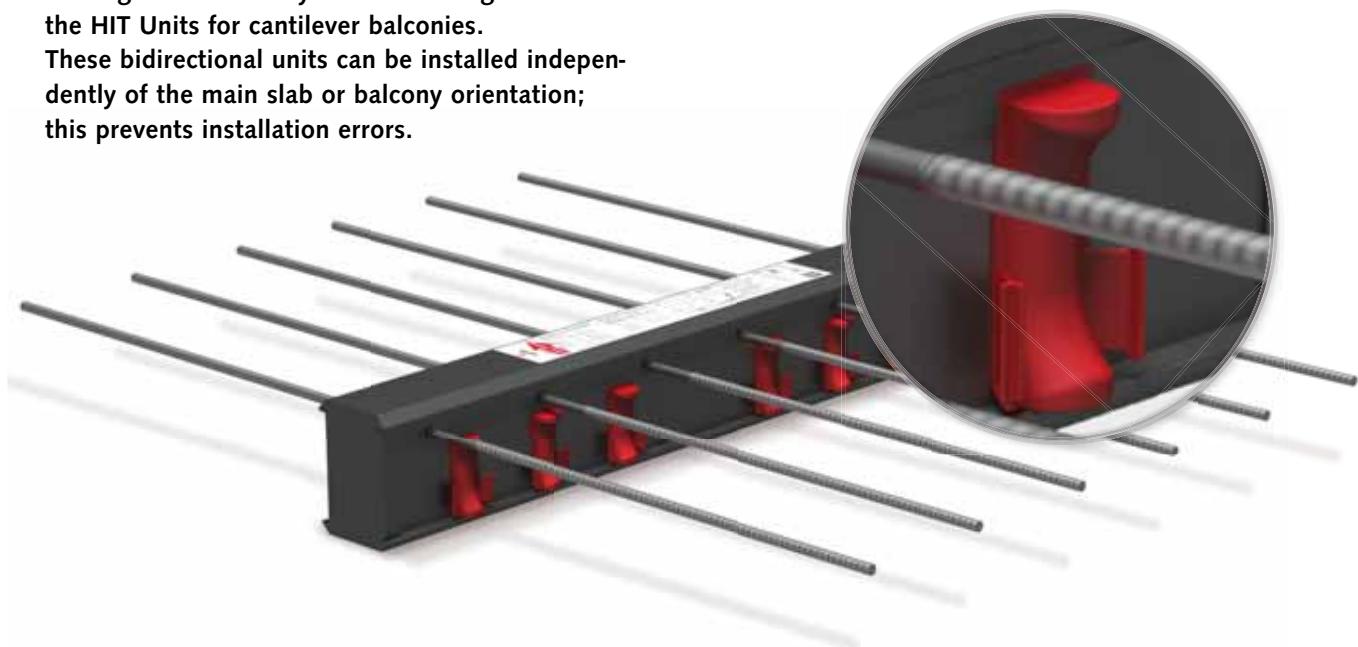

CE marking, with European Technical Approval



HIT units with symmetrical CSBs



Installation independently of the main slab or balcony orientation due to symmetrical shape



Fire-resistance rating



Multi-part design

Your benefits:

- Increased planning reliability; as all cantilevered balcony slab connections are suitable for positive and negative shear forces
- Increased safety during transport of precast and semi-precast balconies
- Improvement in thermal values of up to 30%

HALFEN HIT INSULATED CONNECTION

Contents



Your benefits	4-5
---------------	-----

Type overview	6-9
---------------	-----

Product description	10
---------------------	----

Chapter 1	- HIT-HP MVX, HIT-SP MVX <small>NEW!</small>	11
-----------	--	----

	- HIT-HP COR, HIT-SP COR <small>NEW!</small>	31
--	--	----

Chapter 2	- HIT-HP MVX-OU/OD, HIT-SP MVX-OU/OD <small>NEW!</small>	41
-----------	--	----

Chapter 3	- HIT-HP ZVX, HIT-SP ZVX <small>NEW!</small>	56
-----------	--	----

	- HIT-HP ZDX, HIT-SP ZDX <small>NEW!</small>	57
--	--	----

Chapter 4	- HIT-HP DD, HIT-SP DD	75
-----------	------------------------	----

Chapter 5	- HIT-HP HT, HIT-SP HT	84
-----------	------------------------	----

	- HIT-HP EQ, HIT-SP EQ <small>NEW!</small>	89
--	--	----


Chapter 6	- HIT-HP AT, HIT-SP AT	94
-----------	------------------------	----

	- HIT-HP FT, HIT-SP FT	102
--	------------------------	-----

	- HIT-HP OTX, HIT-SP OTX <small>NEW!</small>	109
--	--	-----

	- HIT-HP FK, HIT-SP FK, width adjustment	117
--	--	-----

Chapter 7	- HIT-ST, HIT-WT	120
-----------	------------------	-----



HIT-HP ZVX
HIT-SP ZVX

Building physics	124
------------------	-----

Chapter 8	- Basics of thermal insulation	125
-----------	--------------------------------	-----

	- Building authority approved thermal values	129
--	--	-----

	- Passive House Institute certification	137
--	---	-----

	- Sound protection according to DIN 4109	139
--	--	-----

	- Fire protection according to EN 13501	140
--	---	-----



HALFEN ψ calculator	128
--------------------------	-----

HIT software	141
--------------	-----

Contact / Technical Support	143
-----------------------------	-----



HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Your Benefits in Planning and Installation of HIT Insulated Connections/Elements

HALFEN HIT Insulated connection – the innovative balcony connection


Our main focus is the development and improvement of our products. Thanks to the innovative, double-symmetrical compression shear bearings CSB, HALFEN can now provide even greater reliability in planning and application as well as an improved installation procedure – either on-site or

in the precast plant. The complete product range includes the HIT-HP with an insulation thickness of 80 mm and the HIT-SP option with 120 mm insulation thickness.

► Reliable installation

The distinct shape of the CSB-bearing means the HIT Insulated connections for cantilevered balconies (HIT-HP/SP MVX, ZDX, DD, HT, EQ) are symmetrical. Installation is therefore independent of the main slab or balcony direction.

- no confusion of installation direction

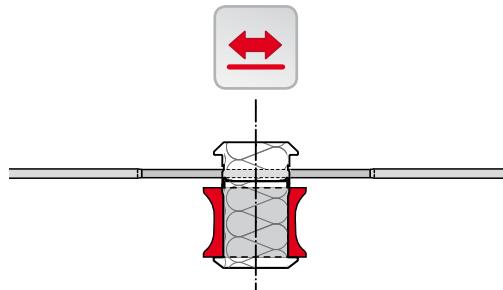


► Reliable planning

HALFEN's integrated safety concept:


The values provided in the tables are actual design values; therefore no additional verification for reduction of the shear force is required by the planner.

- possible shear loads up to 192 kN/m for slab thickness from 16 cm
- easy load range allocation even with the individual elements in our modular system

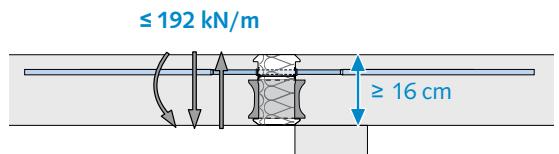

► up to 30% improvement on building-physics key-values

A significant reduction in the number of support elements is achieved due to the further optimization of the CSB-bearings.

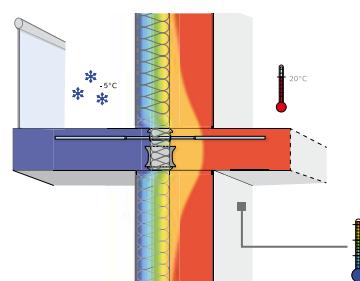

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


Your Benefits in HIT Applications

Further benefits

► Fire protection

The standard HIT Elements fulfil the requirements for the highest fire protection classification REI 120

- fire resistant thermal heat insulation material; A1 building material classification – non-flammable insulation
- suitable for use as a fire-break in ETICS façades (Expanded polystyrene)
- no mix-ups of elements with or without demands on fire protection
- additional fire protection is not required due to integrated all-sided fire protection

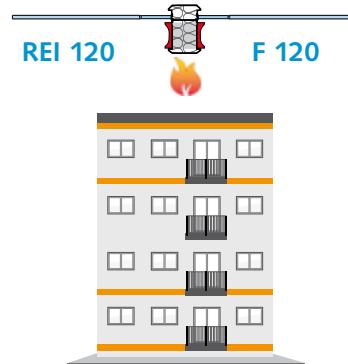

► EnEV conformity

with building authority approved Ψ -Values

DIBt and EOTA approved Ψ -values are available to calculate the total energy balance.

- HIT Calculator available on the HALFEN website: available for all platforms – no installation required!



► Passive House Institute certified

- highest category certified "Certified Passive house component" for the HIT-SP ZVX Element with up to 24 cm slab thickness
- certified as energy saving components starting with an insulation thickness of 80 mm for application in cantilevered and simply supported balcony slabs



► Certification and software

- CE marking with ETA European Technical Approval
- approved by the German Institute for building technology (DIBt Deutsches Institut für Bautechnik)
- user-friendly-software with integrated offcut-optimization to reduce waste





HALFEN HIT INSULATED CONNECTION

Product Overview – Thermally Insulated Connections

1 Cantilevered balcony slabs



Application for cantilevered balcony slabs

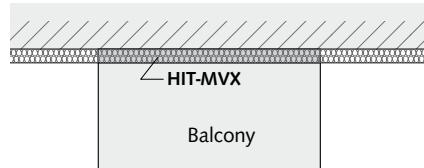



HIT-HP MVX / HIT-SP MVX

NEW!

Transfers bending moments and positive and negative shear forces.

- insulation thickness 80 mm / 120 mm
- page 11

Multi-part application for element slabs

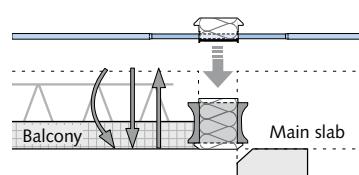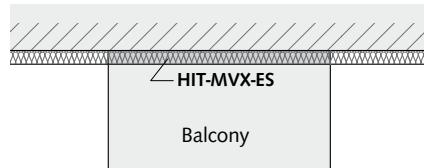

HIT-HP MVX-ES / HIT-SP MVX-ES



NEW!

Product type for element slabs.

Transfers bending moments and positive and negative shear forces.

- insulation thickness 80 mm / 120 mm
- page 11

Application for cantilevered corner balcony slabs

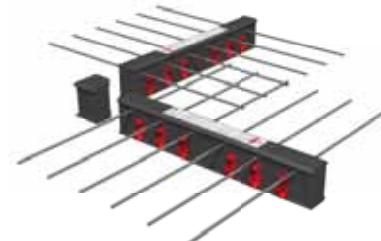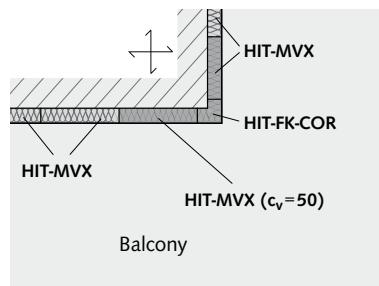

HIT-HP COR / HIT-SP COR

NEW!

For cantilevered outside corner balconies, designed with standard elements with the same load bearing capacity and a corner filler.

- available as product type for element slabs (-ES)
 - insulation thickness 80 mm / 120 mm
- page 31



HALFEN HIT INSULATED CONNECTION

Product Overview – Thermally Insulated Connections

2 Cantilevered balcony slabs with height offset or wall connections



Application for upward height offset

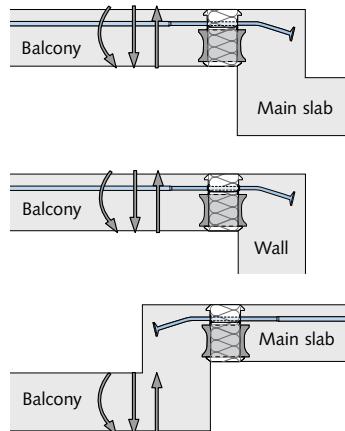
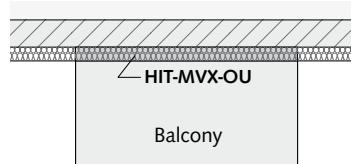


HIT-HP MVX-OU / HIT-SP MVX-OU NEW!

Height offset, balcony higher than main slab, upward wall connection. Transfers bending moments and positive and negative shear forces

- available as product type for element slabs (-ES)
 - available as custom design also for balcony side
 - insulation thickness 80 mm / 120 mm
- page 41

Application for downward height offset

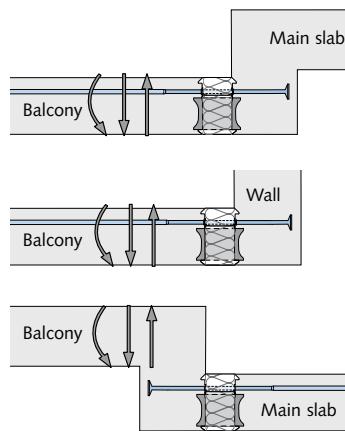
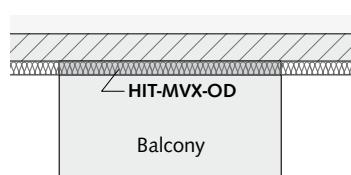


HIT-HP MVX-OD / HIT-SP MVX-OD NEW!

Height offset, balcony lower than main slab; downward wall connection. Transfers bending moments and positive and negative shear forces.

- available as product type for element slabs (-ES)
 - available as custom design also for balcony side
 - insulation thickness 80 mm / 120 mm
- page 41

3 Simply-supported balcony slabs on columns

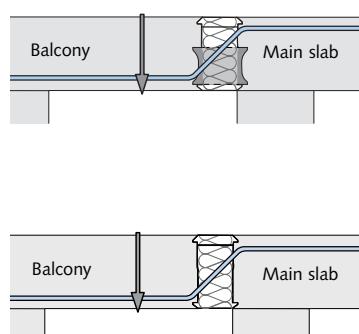

HIT-HP ZVX / HIT-SP ZVX NEW!

Transfers shear forces only

- insulation thickness 80 mm / 120 mm
- page 56

HIT-HP ZVX / HIT-SP ZVX without CSB

Transfers shear forces only for unrestrained simply supported connections, e.g. for loggias



- insulation thickness 80 mm / 120 mm
- page 56

► further types → see following pages

HALFEN HIT INSULATED CONNECTION

Product Overview – Thermally insulated connections

3 Simply-supported balcony slabs on columns

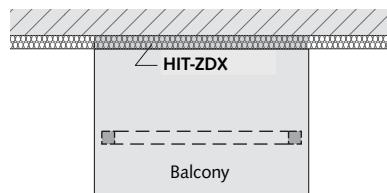

HIT-HP ZDX / HIT-SP ZDX



Transfers positive and negative shear forces

- insulation thickness 80 mm / 120 mm

→ page 57

NEW!

4 Continuous slabs

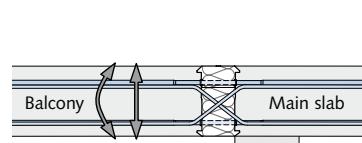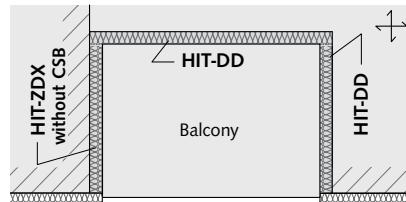



HIT-HP DD / HIT-SP DD

Transfers positive and negative bending moments and shear forces

- insulation thickness 80 mm / 120 mm

→ page 75

5 Absorption of horizontal forces

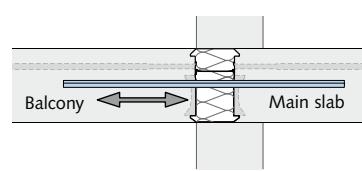
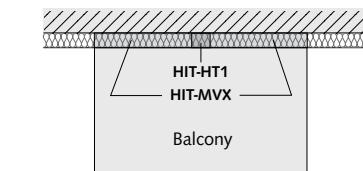


HIT-HP HT / HIT-SP HT

Absorbs horizontal forces parallel and/or perpendicular to the insulation line

- insulation thickness 80 mm / 120 mm

→ page 84

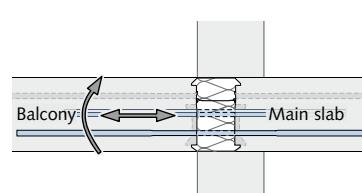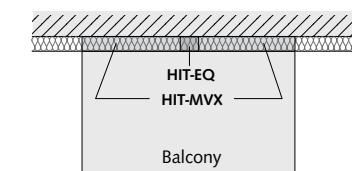

HIT-HP EQ / HIT-SP EQ

For transfer of planned horizontal loads and lifting moments perpendicular to the insulation line

- insulation thickness 80 mm / 120 mm

→ page 89









Application: Earthquake Engineering

HALFEN HIT INSULATED CONNECTION

Product Overview – Thermally insulated connections

6 Parapets and corbels

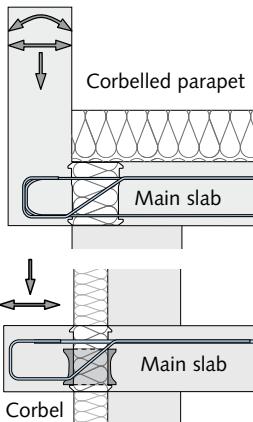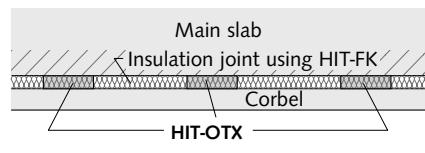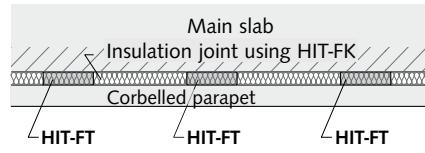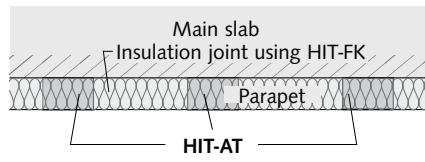

HIT-HP AT / HIT-SP AT

Forms a thermal barrier between parapet and main slab for selective use. Unit spacing based on structural requirements.

- insulation thickness 80 mm / 120 mm
- page 94

HIT-HP FT / HIT-SP FT

Forms a thermal barrier between corbelled parapet and main slab for selective use. Unit spacing based on structural requirements.

- insulation thickness 80 mm / 120 mm
- page 102

HIT-HP OTX / HIT-SP OTX



Forms a thermal barrier between corbel and main slab for selective use. Unit spacing based on structural requirements.

- insulation thickness 80 mm / 120 mm
- page 109

HIT-HP FK / HIT-SP FK: Fillers for insulation of the joint between balcony and main slab. Insulation thickness 80 mm / 120 mm

→ page 117



7 Shear walls and beams

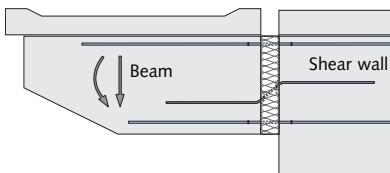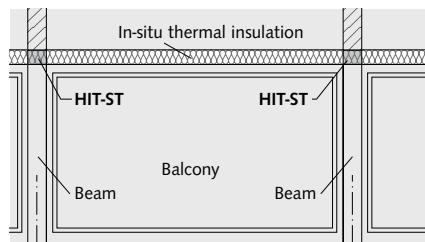

HIT-ST

Insulation for cantilevered beams. Transfers high bending moments and shear forces in selected areas.

- insulation thickness 80 mm
- page 120

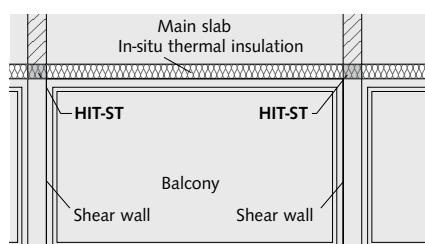

HIT-WT

Insulation for storey-high, cantilevered shear walls. Transfers bending moments and shear forces in selected areas mainly in vertical direction

- insulation thickness 80 mm
- page 120

8 Building physics, technical information



Information on: thermal insulation, fire protection and noise reduction / planning aid / HALFEN design software

→ page 124

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Material Specification and Test Certificates

Material specification

Tension bars	Flash butt welded bar connection, consisting of a combination of two reinforcing steel bars B500B according to DIN 488 and a stainless bar steel of strength class S 690
Shear bars	Stainless bar steel of strength B500NR or flash butt welded bars connection, consisting of a combination of stainless bar steel B500NR and reinforcing steel bars B500B
Compression shear bearings	High-performance mortar with increased compressive and tensile strength as well as optimized thermal conductivity
Casings	Rigid PVC according to EN ISO 1163
Insulating material	Mineral wool (WLG 035) of Building Material Class A1, non-flammable insulation according to DIN 4102-14 or Euro Class A1 according to EN 13501-1
Connecting components	
Concrete	Suited for concrete strengths \geq C20/25
On-site reinforcement	Reinforcing steel B500

Test certificates

Technical Approvals	
HIT-HP/SP MVX	EOTA: ETA-13/0546
HIT-HP/SP ZVX and ZDX	including fire protection, thermal values and noise reduction DoP no. H10-13/0546
HIT-HP/SP MVX	DIBT Berlin: Approval no. Z-15.7-293
HIT-HP/SP ZVX and ZDX	DIBT Berlin: Approval no. Z-15.7-312
HIT-HP/SP DD	DIBT Berlin: Approval no. Z-15.7-309



Type Test

Type-tested by the LGA Landesgewerbeanstalt Bayern	Test-no. S-WUE/100358
--	-----------------------


Certification

Passive House Institute	Certification valid for slab thickness from 160 mm to 240 mm
--------------------------------	--



Approvals and type tests on the internet

The approvals and type tests can be found at www.halfen.com/downloads/brochures. Or simply scan the code and then select the document to download a PDF file.



HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE




HIT-HP MVX, HIT-SP MVX

1

- Symmetrical balcony connection for cantilevered balcony slabs
- Transfers bending moments and positive and negative shear forces



type-tested

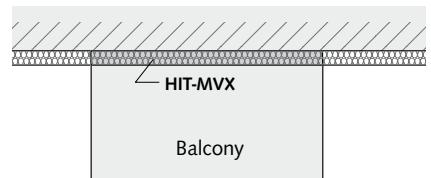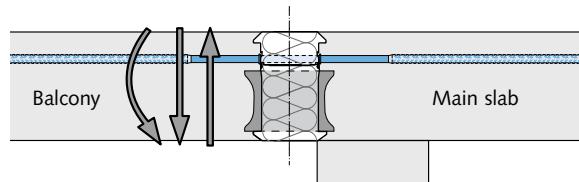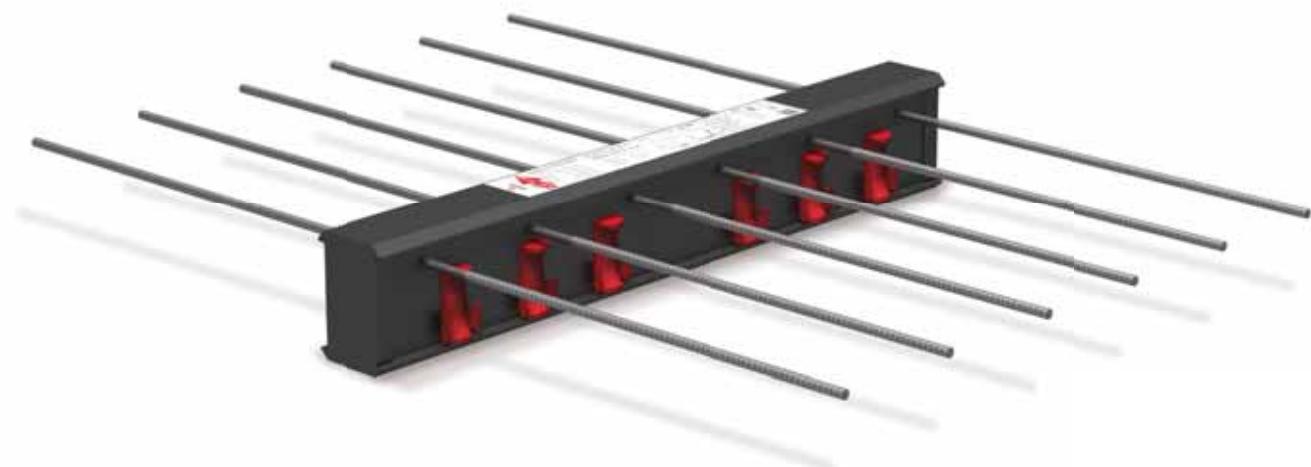

HIT-HP MVX - High Performance with 80 mm insulation thickness

HIT-SP MVX - Superior Performance with 120 mm insulation thickness

Both types are also available as multi-part design (-ES) for element slabs.

Application: Cantilevered balcony

Content	Type	Page
The basics of load bearing capacity	HIT-HP MVX, HIT-SP MVX	12
Product types / Load range	HIT-HP MVX, HIT-SP MVX	13
Load bearing capacity values	HIT-HP MVX, HIT-SP MVX	14-27
Product type for element slabs	HIT-HP MVX-ES, HIT-SP MVX-ES	29
Elements for cantilevered corner balconies	HIT-HP COR, HIT-SP COR	31
On-site connecting reinforcement, installation diagram		34
Camber		39

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Basics on Load Bearing Capacity

Load bearing behaviour of the HIT-MVX

Our latest development: Symmetrical HIT Elements


The static system of the HIT-MVX Elements is made of standard tension rods in reinforcement steel and stainless steel and the innovative CSB-bearing with high density fibre-reinforced high performance mortar. CSB is an abbreviation of Compression-Shear-Bearing and describes its unique function; the simultaneous transmission of shear and compression loads.

Our latest innovation is the double-symmetrical CSB for transmitting shear loads in both directions. In combination with the tension rods these make up the symmetrical HIT-HP MVX which has 80 mm insulation thickness and the HIT-SP MVX with 120 mm insulation thickness.

These elements are suitable for moments as well as positive and negative shear loads.




With the double-symmetrical CSB the HIT-MVX Insulated connections are symmetrical and can be installed independently of the main slab or the balcony direction.



Reliable installation with symmetrical HIT-MVX Elements


The HIT Balcony connection is designed for practical building requirements. All support elements are sufficiently secured in the sturdy plastic housing to ensure safe delivery, transport and easy on-site handling. In addition, the thermal insulation is optimally protected against mechanical damage and water.

The symmetrical HIT-MVX element is easily installed from above in the prepared formwork.

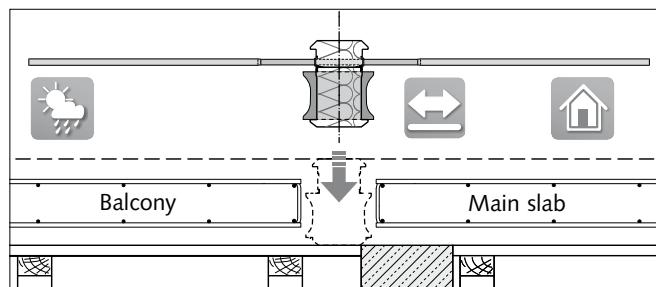

Reliable installation with symmetrical HIT-MVX Elements


The arrow marking defining the installation direction will continue to be displayed on all HIT Elements; including the double-symmetrical HIT-MVX-Type. This is to continue to ensure an efficient installation. If on inspection, it is found that the installation direction shown on the element has been overlooked, the new symmetrical design of the HIT Elements has a distinct advantage: The HIT Element is designed for the same loads and moments in both directions – therefore the HIT Elements can stay in-situ for further installation.

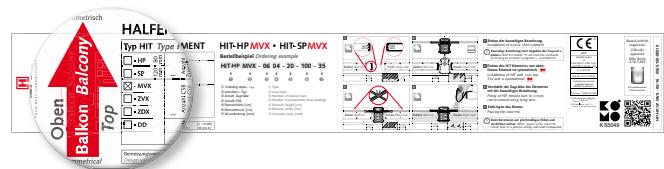

Load characteristics of the HIT Elements

If it is not planned to fully exploit the maximum shear capacity $V_{Rd,1}$, the CSB-technology allows the option of increasing the moment load capacity using $M_{Rd,1}$. $M_{Rd,2}$ is the maximum moment load capacity with the respective shear resistance $V_{Rd,2}$. This structural behaviour is taken into account in our HALFEN HIT-calculation software. The software selects the optimum load range for the HIT Elements for each current load-combination. The software is available in the download section on the HALFEN web page.

The CSB technology allows safe and approval conform transfer of shear loads up to 192 kN per metre in main slab thicknesses from 160 mm and larger. To ensure this high shear capacity in the planned application as a cantilevered slab connection, the following **load/moment ratio** must be observed:

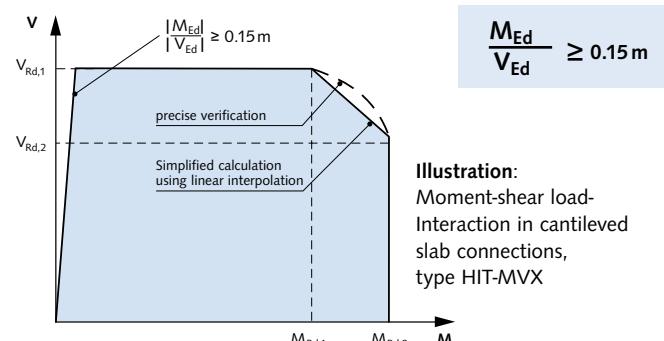

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

Product types – Load range

The respective load range results from the corresponding combination of TB- (tension bar) and CSB- (compression shear bearing) Box. The combinations of TB- and CSB-Box illustrated in the following table are available as standard.

Possible combinations of upper and lower parts																	
Element width B = 25 cm		No. of tension bars n _{TB}															
		1	2	3	4												
Number of compression shear bearings n _{CSB}	1	●	●														
	2	●	●	●	●												
Element width B = 50 cm		No. of tension bars n _{TB}															
		1	2	3	4	5	6	7	8	9							
Number of compression shear bearings n _{CSB}	1	●	●														
	2	●	●	●	●												
	3	●	●	●	●	●	●										
	4	●	●	●	●	●	●	●	●	●							
	5		●	●	●	●	●	●	●	●							
Element width B = 100 cm		No. of tension bars n _{TB}															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	16	18
Number of compression shear bearings n _{CSB}	2		●	●	●	●	●										
	3		●	●	●	●	●	●	●	●							
	4		●	●	●	●	●	●	●	●	●	●					
	5			●	●	●	●	●	●	●	●	●	●				
	6			●	●	●	●	●	●	●	●	●	●				
	7			●	●	●	●	●	●	●	●	●	●				
	8			●	●	●	●	●	●	●	●	●	●				
	9				●	●	●	●	●	●	●	●	●				
	10					●	●	●	●	●	●	●	●				
	11						●	●	●	●	●	●	●				
	12							●	●	●	●	●	●				

Values for load bearing capacities for selected elements → see pages 14 – 27.

● = HP and SP

 The complete, type-tested load class range for concrete grades C20/25, C25/30 and C30/37 can be downloaded at www.halfen.com.

Ordering example

HIT-HP	MVX	- 08 08	- 20	- 100	- 35
HIT-HP	MVX	- 04 04	- 18	- 050	- 50
HIT-SP	MVX	- 02 02	- 18	- 025	- 30 - ES
↓	↓	↓	↓	↓	↓
①	②	③	④	⑤	⑥
⑦	⑧	⑨			

HIT Custom solutions

Our technical support team is available to provide support in your project with custom solutions using HALFEN HIT Insulated connections.

Contact: → see inside back cover

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Number of tension bars
- ⑤ Number of CSB compression shear units
- ⑥ Element height [cm]
- ⑦ Element width [cm]
- ⑧ Concrete cover (top) [mm]
- ⑨ For element slab design only

Available slab thickness h

Concrete cover [mm]	30	35	50
Available slab thickness h [cm]	16 – 35	16 – 35	18 – 35

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0202	HP MVX-0302	HP MVX-0203	HP MVX-0403	HP MVX-0603
	B = 0.50 m	HP MVX-0101	—	—	—	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	32.0 32.0	32.0 32.0	48.0 48.0	48.0 48.0	48.0 48.0



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0202	HP MVX-0302	HP MVX-0203	HP MVX-0403	HP MVX-0603	
	B = 0.50 m	HP MVX-0101	—	—	—	—	
	B = 0.25 m	—	—	—	—	—	
Concrete cover [mm]	30	35	50				
		160	8.5 8.7	11.3 11.9	9.0 9.2	15.7 16.4	18.5 21.5
	160	180	8.9 9.2	12.1 12.7	9.5 9.7	16.7 17.4	19.8 23.0
	170	190	9.4 9.7	12.8 13.4	10.0 10.2	17.7 18.4	21.0 24.4
	170	190	9.9 10.2	13.6 14.1	10.5 10.7	18.7 19.4	22.3 25.9
	180	200	10.4 10.7	14.3 14.9	11.0 11.2	19.6 20.3	23.6 27.4
	180	200	10.9 11.2	15.0 15.6	11.5 11.7	20.6 21.3	24.8 28.8
	190	210	11.4 11.7	15.8 16.4	12.0 12.2	21.6 22.3	26.1 30.3
	190	210	11.9 12.2	16.5 17.1	12.5 12.7	22.6 23.3	27.4 31.8
	200	220	12.4 12.6	17.2 17.8	13.0 13.2	23.6 24.3	28.6 33.2
	200	220	12.9 13.1	18.0 18.6	13.5 13.6	24.6 25.3	29.9 34.7
	210	230	13.4 13.6	18.7 19.3	14.0 14.1	25.5 26.2	31.2 36.2
	210	230	13.9 14.1	19.5 20.0	14.5 14.6	26.5 27.2	32.5 37.6
	220	240	14.4 14.6	20.2 20.8	14.9 15.1	27.5 28.2	33.7 39.1
	220	240	14.8 15.1	20.9 21.5	15.4 15.6	28.5 29.2	35.0 40.6
	230	250	15.3 15.6	21.7 22.3	15.9 16.1	29.5 30.2	36.3 42.0
	230	250	15.8 16.1	22.4 23.0	16.4 16.6	30.5 31.2	37.5 43.5
	240	260	16.3 16.6	23.1 23.7	16.9 17.1	31.5 32.1	38.8 45.0
	240	260	16.8 17.1	23.9 24.5	17.4 17.6	32.4 33.1	40.1 46.4
	250	270	17.3 17.6	24.6 25.2	17.9 18.1	33.4 34.1	41.3 47.9
	250	270	17.8 18.1	25.4 25.9	18.4 18.6	34.4 35.1	42.6 49.4
	> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.				



On-site reinforcement $A_{s,req}$

Edge frame	direct support		$\varnothing 6 / 25\text{ cm}$
Suspension reinforcement	indirect support	$\varnothing 6 / 25\text{ cm}$	$\varnothing 6 / 19.5\text{ cm}$ $\varnothing 6 / 17.5\text{ cm}$ $\varnothing 6 / 17\text{ cm}$



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)

 Shear capacity $\pm v_{Rd}$	Concrete strength: C20/25 ≥C25/30						
---	-----------------------------------	--	--	--	--	---	---

Type / Element width	B = 1.00 m	HP MVX-0204	HP MVX-0404	HP MVX-0504	HP MVX-0604	HP MVX-0704
	B = 0.50 m	HP MVX-0102	HP MVX-0202	—	HP MVX-0302	—
	B = 0.25 m	—	HP MVX-0101	—	—	—
Design values	v_{Rd} [kN/m]	58.0	60.4	64.0	64.0	—

 Moment bearing capacity m_{Rd}	Concrete strength: C20/25 ≥C25/30						
--	-----------------------------------	--	--	--	--	---	---

Type / Element width	B = 1.00 m	HP MVX-0204	HP MVX-0404	HP MVX-0504	HP MVX-0604	HP MVX-0704						
	B = 0.50 m	HP MVX-0102	HP MVX-0202	—	HP MVX-0302	—						
	B = 0.25 m	—	HP MVX-0101	—	—	—						
Concrete cover [mm]	30	35	50	—	—	—						
	160	9.3	9.5	16.9	17.4	20.0	20.8	22.7	23.9	24.7	26.5	
	160	180	9.8	10.0	17.9	18.4	21.2	22.1	24.2	25.3	26.3	28.2
	170	190	10.3	10.5	18.9	19.4	22.5	23.3	25.6	26.8	28.0	29.9
	170	190	10.8	10.9	19.9	20.4	23.7	24.5	27.1	28.3	29.7	31.7
	180	200	11.3	11.4	20.8	21.4	24.9	25.7	28.6	29.8	31.4	33.4
	180	200	11.8	11.9	21.8	22.3	26.2	27.0	30.1	31.2	33.1	35.1
	190	210	12.3	12.4	22.8	23.3	27.4	28.2	31.5	32.7	34.8	36.8
	190	210	12.8	12.9	23.8	24.3	28.6	29.4	33.0	34.2	36.5	38.6
	200	210	13.3	13.4	24.8	25.3	29.8	30.7	34.5	35.7	38.2	40.3
	200	220	13.8	13.9	25.8	26.3	31.1	31.9	36.0	37.1	39.9	42.0
	200	210	14.3	14.4	26.7	27.3	32.3	33.1	37.4	38.6	41.6	43.7
	210	230	14.7	14.9	27.7	28.2	33.5	34.4	38.9	40.1	43.3	45.4
	220	240	15.2	15.4	28.7	29.2	34.8	35.6	40.4	41.6	44.9	47.2
	220	240	15.7	15.9	29.7	30.2	36.0	36.8	41.9	43.0	46.6	48.9
	230	250	16.2	16.4	30.7	31.2	37.2	38.0	43.3	44.5	48.3	50.6
	230	250	16.7	16.8	31.7	32.2	38.5	39.3	44.8	46.0	50.0	52.3
	240	260	17.2	17.3	32.6	33.2	39.7	40.5	46.3	47.5	51.7	54.0
	240	260	17.7	17.8	33.6	34.1	40.9	41.7	47.8	48.9	53.4	55.8
	250	270	18.2	18.3	34.6	35.1	42.1	43.0	49.2	50.4	55.1	57.5
	250	270	18.7	18.8	35.6	36.1	43.4	44.2	50.7	51.9	56.8	59.2
	> 250	Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.										

 On-site reinforcement $A_{s,req}$	Concrete strength: C20/25 ≥C25/30						
---	-----------------------------------	--	--	--	--	---	---

Edge frame	direct support	$\varnothing 6 / 25\text{ cm}$				
Suspension reinforcement	indirect support	$\varnothing 6 / 14\text{ cm}$	$\varnothing 6 / 13.5\text{ cm}$	$\varnothing 6 / 13\text{ cm}$	$\varnothing 6 / 12.5\text{ cm}$	

 All necessary verifications have already been considered. Connecting elements must be verified by the planner.

 HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0804	HP MVX-0505	HP MVX-0605	HP MVX-0705	HP MVX-0805
	B = 0.50 m	HP MVX-0402	—	—	—	—
	B = 0.25 m	HP MVX-0201	—	—	—	—
Design values	v_{Rd} [kN/m]	64.0 64.0		80.0	80.0	



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0804	HP MVX-0505	HP MVX-0605	HP MVX-0705	HP MVX-0805
	B = 0.50 m	HP MVX-0402	—	—	—	—
	B = 0.25 m	HP MVX-0201	—	—	—	—
Concrete cover [mm]	30	35	50			
		160	24.7 28.7	21.1 21.8	24.3 25.2	27.1 28.4
	160	180	26.4 30.6	22.4 23.0	25.8 26.7	28.8 30.1
		170	28.0 32.6	23.6 24.2	27.2 28.2	30.5 31.8
	170	190	29.7 34.5	24.8 25.5	28.7 29.6	32.2 33.5
		180	31.4 36.5	26.0 26.7	30.2 31.1	34.0 35.2
	180	200	33.1 38.4	27.3 27.9	31.7 32.6	35.7 37.0
		190	34.8 40.4	28.5 29.2	33.1 34.1	37.4 38.7
	190	210	36.5 42.4	29.7 30.4	34.6 35.5	39.1 40.4
		200	38.2 44.3	31.0 31.6	36.1 37.0	40.9 42.1
	200	220	39.9 46.3	32.2 32.8	37.6 38.5	42.6 43.9
		210	41.6 48.2	33.4 34.1	39.0 40.0	44.3 45.6
	210	230	43.3 50.2	34.6 35.3	40.5 41.4	46.0 47.3
		220	45.0 52.1	35.9 36.5	42.0 42.9	47.7 49.0
	220	240	46.7 54.1	37.1 37.8	43.5 44.4	49.5 50.7
		230	48.3 56.0	38.3 39.0	44.9 45.9	51.2 52.5
	230	250	50.0 58.0	39.6 40.2	46.4 47.4	52.9 54.2
		240	51.7 60.0	40.8 41.4	47.9 48.8	54.6 55.9
	240	260	53.4 61.9	42.0 42.7	49.4 50.3	56.3 57.6
		250	55.1 63.9	43.3 43.9	50.8 51.8	58.1 59.3
	250	270	56.8 65.8	44.5 45.1	52.3 53.3	59.8 61.1
		> 250				

Load bearing capacity values for further types (e.g. for $h > 250$ mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.



On-site reinforcement $A_{s,req}$

Edge frame	direct support	$\varnothing 6 / 25$ cm		
Suspension reinforcement	indirect support	$\varnothing 6 / 12.5$ cm	$\varnothing 8 / 19.5$ cm	$\varnothing 8 / 19$ cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0506	HP MVX-0606	HP MVX-0706	HP MVX-0806	HP MVX-0906
	B = 0.50 m	—	HP MVX-0303	—	HP MVX-0403	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]			96.0	96.0	



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0506	HP MVX-0606	HP MVX-0706	HP MVX-0806	HP MVX-0906						
	B = 0.50 m	—	HP MVX-0303	—	HP MVX-0403	—						
	B = 0.25 m	—	—	—	—	—						
Concrete cover [mm]	30	35	50									
	160	21.9	22.4	25.4	26.1	28.5	29.6	31.4	32.8	34.0	35.8	
	160	180	23.1	23.6	26.8	27.6	30.3	31.3	33.4	34.8	36.2	38.0
	170	190	24.3	24.9	28.3	29.1	32.0	33.0	35.4	36.8	38.5	40.2
	170	190	25.6	26.1	29.8	30.6	33.7	34.8	37.3	38.7	40.7	42.4
	180	200	26.8	27.3	31.3	32.0	35.4	36.5	39.3	40.7	42.9	44.6
	180	200	28.0	28.6	32.7	33.5	37.1	38.2	41.3	42.7	45.1	46.9
	190	210	29.2	29.8	34.2	35.0	38.9	39.9	43.2	44.6	47.3	49.1
	190	210	30.5	31.0	35.7	36.5	40.6	41.7	45.2	46.6	49.5	51.3
	200	220	31.7	32.2	37.2	37.9	42.3	43.4	47.2	48.6	51.7	53.5
	200	220	32.9	33.5	38.6	39.4	44.0	45.1	49.1	50.5	53.9	55.7
	210	230	34.2	34.7	40.1	40.9	45.7	46.8	51.1	52.5	56.2	57.9
	210	230	35.4	35.9	41.6	42.4	47.5	48.5	53.1	54.5	58.4	60.1
	220	240	36.6	37.2	43.1	43.8	49.2	50.3	55.0	56.4	60.6	62.3
	220	240	37.8	38.4	44.5	45.3	50.9	52.0	57.0	58.4	62.8	64.6
	230	250	39.1	39.6	46.0	46.8	52.6	53.7	59.0	60.4	65.0	66.8
	230	250	40.3	40.8	47.5	48.3	54.4	55.4	60.9	62.3	67.2	69.0
	240	260	41.5	42.1	49.0	49.7	56.1	57.1	62.9	64.3	69.4	71.2
	240	260	42.8	43.3	50.4	51.2	57.8	58.9	64.9	66.3	71.6	73.4
	250	270	44.0	44.5	51.9	52.7	59.5	60.6	66.8	68.2	73.9	75.6
	250	270	45.2	45.8	53.4	54.2	61.2	62.3	68.8	70.2	76.0	77.8
	> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.									



On-site reinforcement $A_{s,req}$

Edge frame	direct support		$\varnothing 6 / 25\text{ cm}$
Suspension reinforcement	indirect support	$\varnothing 8 / 16.5\text{ cm}$	$\varnothing 6 / 16\text{ cm}$ $\varnothing 8 / 15.5\text{ cm}$



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-1006	HP MVX-1106	HP MVX-0507	HP MVX-0607	HP MVX-0707
	B = 0.50 m	HP MVX-0503	—	—	—	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	96.0	96.0		112.0	112.0



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-1006	HP MVX-1106	HP MVX-0507	HP MVX-0607	HP MVX-0707	
	B = 0.50 m	HP MVX-0503	—	—	—	—	
	B = 0.25 m	—	—	—	—	—	
Concrete cover [mm]	30	35	50				
		160	36.3	38.5	37.0	41.0	
		160	38.8	41.0	39.5	43.7	
		170	41.2	43.4	42.1	46.4	
		170	43.7	45.9	44.6	49.1	
		180	46.2	48.3	47.1	51.8	
		180	48.6	50.8	49.7	54.5	
		190	51.1	53.3	52.2	57.2	
		190	53.5	55.7	54.8	59.9	
		200	56.0	58.2	57.3	62.6	
		200	58.5	60.6	59.8	65.3	
		210	60.9	63.1	62.4	68.0	
		210	63.4	65.5	64.9	70.7	
		220	65.8	68.0	67.4	73.4	
		220	68.3	70.5	70.0	76.1	
		230	70.7	72.9	72.5	78.8	
		230	73.2	75.4	75.1	81.5	
		240	75.7	77.8	77.6	84.2	
		240	78.1	80.3	80.1	86.9	
		250	80.6	82.8	82.7	89.6	
		250	83.0	85.2	85.2	92.3	
	> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.				



On-site reinforcement $A_{s,req}$

Edge frame	direct support		$\varnothing 6$ / 25 cm
Suspension reinforcement	indirect support	$\varnothing 8$ / 15 cm	$\varnothing 8$ / 14.5 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0807	HP MVX-0907	HP MVX-1007	HP MVX-1107	HP MVX-1407
	B = 0.50 m	—	—	—	—	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]			112.0	112.0	



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0807	HP MVX-0907	HP MVX-1007	HP MVX-1107	HP MVX-1407						
	B = 0.50 m	—	—	—	—	—						
	B = 0.25 m	—	—	—	—	—						
Concrete cover [mm]	30	35	50									
	160	32.8	34.0	35.7	37.2	38.4	40.3	40.9	43.1	43.2	50.2	
	160	180	34.8	35.9	38.0	39.5	40.9	42.8	43.6	45.8	46.1	53.6
	170	190	36.7	37.9	40.2	41.7	43.4	45.2	46.3	48.6	49.1	57.0
	170	190	38.7	39.9	42.4	43.9	45.8	47.7	49.0	51.3	52.0	60.4
	180	200	40.7	41.8	44.6	46.1	48.3	50.1	51.7	54.0	55.0	63.9
	180	200	42.6	43.8	46.8	48.3	50.7	52.6	54.4	56.7	58.0	67.3
	190	210	44.6	45.8	49.0	50.5	53.2	55.1	57.1	59.4	60.9	70.7
	190	210	46.6	47.7	51.2	52.7	55.7	57.5	59.8	62.1	63.9	74.1
	200	220	48.5	49.7	53.4	55.0	58.1	60.0	62.5	64.8	66.8	77.6
	200	220	50.5	51.7	55.7	57.2	60.6	62.4	65.2	67.5	69.8	81.0
	210	230	52.5	53.6	57.9	59.4	63.0	64.9	67.9	70.2	72.8	84.4
	210	230	54.4	55.6	60.1	61.6	65.5	67.3	70.6	72.9	75.7	87.8
	220	240	56.4	57.6	62.3	63.8	67.9	69.8	73.3	75.6	78.7	91.2
	220	240	58.4	59.5	64.4	66.0	70.4	72.3	76.0	78.3	81.6	94.7
	230	250	60.3	61.5	66.4	68.2	72.9	74.7	78.8	81.0	84.6	98.1
	230	250	62.3	63.5	68.3	70.4	75.1	77.2	81.5	83.7	87.6	101.5
	240	260	64.3	65.4	70.2	72.7	77.2	79.6	84.1	86.4	90.5	104.9
	240	260	66.2	67.4	72.2	74.9	79.4	82.1	86.4	89.1	93.5	108.3
	250	270	68.2	69.4	74.1	77.1	81.5	84.6	88.8	91.8	96.4	111.8
	250	270	70.2	71.3	76.0	79.3	83.7	87.0	91.1	94.5	99.4	115.2
	> 250											

Load bearing capacity values for further types (e.g. for $h > 250\text{mm}$, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.



On-site reinforcement $A_{s,req}$

Edge frame	direct support	ø6 / 25 cm	ø6 / 24.5 cm	ø6 / 23.5 cm	ø6 / 21.5 cm
Suspension reinforcement	indirect support	ø8 / 13.5 cm	ø8 / 13 cm	ø8 / 12.5 cm	



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0508	HP MVX-0608	HP MVX-0708	HP MVX-0808	HP MVX-0908
	B = 0.50 m	—	HP MVX-0304	—	HP MVX-0404	—
	B = 0.25 m	—	—	—	HP MVX-0202	—
Design values	v_{Rd} [kN/m]			128.0	128.0	



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0508	HP MVX-0608	HP MVX-0708	HP MVX-0808	HP MVX-0908							
	B = 0.50 m	—	HP MVX-0304	—	HP MVX-0404	—							
	B = 0.25 m	—	—	—	HP MVX-0202	—							
Concrete cover [mm]	30	35	50										
		160	22.8	23.2	26.7	27.3	30.4	31.2	33.8	34.8	37.0	38.3	
	160	180	24.0	24.4	28.2	28.7	32.1	32.9	35.8	36.8	39.2	40.6	
		170	25.3	25.7	29.6	30.2	33.8	34.6	37.7	38.8	41.5	42.8	
	170	190	26.5	26.9	31.1	31.7	35.5	36.3	39.7	40.7	43.7	45.0	
		180	27.7	28.1	32.6	33.2	37.2	38.0	41.7	42.7	45.9	47.2	
	180	200	28.9	29.3	34.1	34.6	39.0	39.8	43.6	44.7	48.1	49.4	
		190	30.2	30.6	35.5	36.1	40.7	41.5	45.6	46.6	50.3	51.6	
	190	210	31.4	31.8	37.0	37.6	42.4	43.2	47.6	48.6	52.5	53.8	
		200	32.6	33.0	38.5	39.1	44.1	44.9	49.5	50.6	54.7	56.0	
	200	220	33.9	34.3	40.0	40.5	45.8	46.6	51.5	52.5	56.7	58.3	
		210	35.1	35.5	41.4	42.0	47.6	48.4	53.5	54.5	58.7	60.5	
	210	230	36.3	36.7	42.9	43.5	49.3	50.1	55.4	56.5	60.6	62.7	
		220	37.5	38.0	44.4	45.0	51.0	51.8	57.4	58.4	62.5	64.9	
	220	240	38.8	39.2	45.9	46.4	52.7	53.5	59.4	60.4	64.4	67.1	
		230	40.0	40.4	47.3	47.9	54.4	55.2	61.3	62.4	66.4	69.3	
	230	250	41.2	41.6	48.8	49.4	56.2	57.0	63.3	64.3	68.3	71.5	
		240	42.5	42.9	50.3	50.9	57.9	58.7	65.3	66.3	70.2	73.8	
	240	260	43.7	44.1	51.8	52.3	59.6	60.4	67.2	68.3	72.2	76.0	
		250	44.9	45.3	53.2	53.8	61.3	62.1	69.2	70.2	74.1	78.2	
	250	270	46.1	46.6	54.7	55.3	63.1	63.9	71.2	72.2	76.0	80.4	
		> 250	Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.										



On-site reinforcement $A_{s,req}$

Edge frame	direct support		ø6 / 25 cm	ø6 / 23.5 cm
Suspension reinforcement	indirect support	ø8 / 13 cm	ø8 / 12.5 cm	ø8 / 12 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)

		Shear capacity $\pm v_{Rd}$		Concrete strength: C20/25 ≥ C25/30				80	
Type / Element width	B = 1.00 m	HP MVX-1008	HP MVX-1108	HP MVX-1208	HP MVX-1308	HP MVX-1209			
	B = 0.50 m	HP MVX-0504	—	HP MVX-0604	—	—			
	B = 0.25 m	—	—	HP MVX-0302	—	—			
Design values	v_{Rd} [kN/m]			128.0	128.0			144.0	144.0

			B = 1.00 m		HP MVX-1008	HP MVX-1108	HP MVX-1208	HP MVX-1308	HP MVX-1209
			B = 0.50 m		HP MVX-0504	—	HP MVX-0604	—	—
			B = 0.25 m		—	—	HP MVX-0302	—	—
Concrete cover [mm]	30	35	50						
			160		40.0	41.7	42.8	44.8	45.4
			160	180	42.5	44.1	45.5	47.5	48.3
			170	190	44.9	46.6	48.2	50.2	51.3
			170	190	47.4	49.0	50.9	52.9	54.2
			180	200	49.9	51.5	53.6	55.6	57.2
			180	200	52.3	54.0	56.3	58.3	60.1
			190	210	54.8	56.4	59.0	61.0	63.1
			190	210	57.2	58.9	61.7	63.7	66.0
			200	220	59.7	61.3	64.4	66.4	69.0
			200	220	62.2	63.8	67.1	69.1	71.9
			200	220	64.4	66.2	69.9	71.8	74.9
			210	230	66.5	68.7	72.3	74.5	77.8
			210	230	68.7	71.2	74.6	77.2	80.4
			220	240	70.8	73.6	77.0	79.9	83.0
			220	240	72.9	76.1	79.3	82.6	85.6
			230	250	75.1	78.5	81.7	85.3	88.2
			230	250	77.2	81.0	84.1	88.1	90.7
			240	260	79.4	83.5	86.4	90.8	94.9
			240	260	81.5	85.9	88.8	93.5	95.9
			250	270	83.7	88.4	91.1	96.2	98.4
			250	270	88.4	91.1	96.2	103.8	105.3
			> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.				

Edge frame	direct support	ø6 / 22.5 cm	ø6 / 21.5 cm	ø6 / 21 cm	ø6 / 20.5 cm	ø6 / 19.5 cm
Suspension reinforcement	indirect support	ø8 / 12 cm		ø8 / 11.5 cm		ø8 / 10.5 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-1409		HP MVX-1210		HP MVX-1810*		HP MVX-1011		HP MVX-1211*		
	B = 0.50 m	—		HP MVX-0605		HP MVX-0905*		—		—		
	B = 0.25 m	—		—		—		—		—		
Design values	v_{Rd} [kN/m]	144.0		144.0		160.0		160.0		57.9		73.9
		176.0		176.0		132.3		147.6				



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			HP MVX-1409		HP MVX-1210		HP MVX-1810*		HP MVX-1011		HP MVX-1211*	
	B = 0.50 m			—		HP MVX-0605		HP MVX-0905*		—		—	
	B = 0.25 m			—		—		—		—		—	
Concrete cover [mm]	30	35	50										
		160		44.3	50.1	41.2	47.1	63.2	67.5	37.2	43.1	49.6	51.4
	160		180	47.0	53.2	43.6	49.8	67.7	71.9	39.3	45.5	52.1	54.4
		170		49.7	56.2	46.0	52.5	72.1	76.3	41.3	47.9	54.7	57.3
	170		190	52.4	59.2	48.4	55.2	76.5	80.8	43.4	50.2	57.3	60.3
		180		55.1	62.2	50.7	57.9	81.0	85.2	45.5	52.6	59.8	63.2
	180		200	57.8	65.3	53.1	60.6	84.9	89.6	47.5	55.0	62.4	66.2
		190		60.5	68.3	55.5	63.3	88.7	94.0	49.6	57.4	65.0	69.1
	190		210	63.2	71.3	57.9	66.0	92.6	98.5	51.7	59.8	67.6	72.1
		200		65.9	74.3	60.3	68.7	96.5	102.9	53.7	62.2	70.1	75.0
	200		220	68.6	77.3	62.7	71.4	100.3	107.3	55.8	64.5	72.7	78.0
		210		71.3	80.4	65.0	74.1	104.2	111.7	57.8	66.9	75.3	80.9
	210		230	74.0	83.4	67.4	76.8	108.0	116.2	59.9	69.3	77.9	83.9
		220		76.7	86.4	69.8	79.5	111.9	120.6	62.0	71.7	80.4	86.8
	220		240	79.4	89.4	72.2	82.2	115.7	125.0	64.0	74.1	83.0	89.8
		230		82.1	92.5	74.6	84.9	119.6	129.4	66.1	76.5	85.6	92.7
	230		250	84.8	95.5	77.0	87.6	123.5	133.9	68.2	78.8	88.2	95.7
		240		87.5	98.5	79.3	90.3	127.3	138.3	70.2	81.2	90.7	98.6
	240		260	90.2	101.5	81.7	93.0	131.2	142.7	72.3	83.6	93.3	101.6
		250		92.9	104.6	84.1	95.7	135.0	147.1	74.4	86.0	95.9	104.5
	250		270	95.6	107.6	86.5	98.4	138.9	151.6	76.4	88.4	98.4	107.5
		> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.									

*Load bearing capacity values for $v_{Rd,2}$ and $m_{Rd,2}$



On-site reinforcement $A_{s,req}$

Edge frame	direct support	$\varnothing 6$ / 18.5 cm	$\varnothing 6$ / 19 cm	$\varnothing 6$ / 15.5 cm	$\varnothing 6$ / 19 cm	$\varnothing 6$ / 17.5 cm
Suspension reinforcement	indirect support	$\varnothing 8$ / 10.5 cm	$\varnothing 8$ / 9 cm	$\varnothing 8$ / 9.5 cm		$\varnothing 8$ / 9 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX

Load bearing capacity values $v_{Rd,2}$ / $m_{Rd,2}$ according to EN 1992-1-1 (EC2)

 Shear capacity $\pm v_{Rd}$	Concrete strength: C20/25 ≥C25/30 						 80
---	---	--	--	--	--	--	--

Type / Element width	B = 1.00 m	HP MVX-1311	HP MVX-1811	HP MVX-1212	HP MVX-1312	HP MVX-1812	
	B = 0.50 m	—	—	—	—	—	
	B = 0.25 m	—	—	—	—	—	
Design values	v_{Rd} [kN/m]	120.1 135.3	59.5 73.9	135.8 147.6	124.4 135.3	70.0 73.9	

 Moment bearing capacity m_{Rd}	Concrete strength: C20/25 ≥C25/30 						
--	---	--	--	--	--	--	--

Type / Element width	B = 1.00 m	HP MVX-1311	HP MVX-1811	HP MVX-1212	HP MVX-1312	HP MVX-1812							
	B = 0.50 m	—	—	—	—	—							
	B = 0.25 m	—	—	—	—	—							
Concrete cover [mm]	30	35	50										
	160	52.6	54.8	65.6	69.7	49.6	52.3	52.6	55.8	65.6	71.6		
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160	180	55.4	58.0	69.4	74.1	52.1	55.2	55.4	59.0	69.4	76.0	
	170	190	58.2	61.2	73.3	78.6	54.7	58.2	58.2	62.2	73.3	80.4	
	170	190	61.0	64.4	77.2	83.0	57.3	61.1	61.0	65.4	77.2	84.8	
	180	200	63.8	67.6	81.0	87.4	59.8	64.1	63.8	68.6	81.0	89.3	
	180	200	66.6	70.8	84.9	91.8	62.4	67.0	66.6	71.8	84.9	93.7	
	190	210	69.4	74.0	88.7	96.3	65.0	70.0	69.4	75.0	88.7	98.1	
	190	210	72.1	77.2	92.6	100.7	67.6	72.9	72.1	78.2	92.6	102.6	
	200	210	74.9	80.4	96.5	105.1	70.1	75.9	74.9	81.4	96.5	107.0	
	200	220	77.7	83.6	100.3	109.5	72.7	78.8	77.7	84.6	100.3	111.4	
	210	230	80.5	86.8	104.2	114.0	75.3	81.8	80.5	87.8	104.2	115.8	
	210	230	83.3	90.0	108.0	118.4	77.9	84.7	83.3	91.0	108.0	120.3	
	220	240	86.1	93.2	111.9	122.8	80.4	87.7	86.1	94.2	111.9	124.7	
	220	240	88.9	96.4	115.7	127.2	83.0	90.6	88.9	97.4	115.7	129.1	
	230	250	91.7	99.6	119.6	131.7	85.6	93.6	91.7	100.5	119.6	133.5	
	230	250	94.4	102.8	123.5	136.1	88.2	96.5	94.4	103.7	123.5	138.0	
	240	260	97.2	106.0	127.3	140.5	90.7	99.5	97.2	106.9	127.3	142.4	
	240	260	100.0	109.2	131.2	144.9	93.3	102.4	100.0	110.1	131.2	146.8	
	250	270	102.8	112.4	135.0	149.4	95.9	105.4	102.8	113.3	135.0	151.2	
	250	270	105.6	115.6	138.9	153.8	98.4	108.3	105.6	116.5	138.9	155.7	
	> 250		Load bearing capacity values for further types (e.g. for h > 250mm, C30/37, $v_{Rd,1}$ and $m_{Rd,1}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.										

 On-site reinforcement $A_{s,req}$	Edge frame direct support	$\phi 6 / 17 \text{ cm}$	$\phi 6 / 14.5 \text{ cm}$	$\phi 6 / 16.5 \text{ cm}$	$\phi 6 / 16 \text{ cm}$	$\phi 6 / 14 \text{ cm}$
Suspension reinforcement indirect support		$\phi 8 / 9 \text{ cm}$			$\phi 8 / 8.5 \text{ cm}$	



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



120

Type / Element width	B = 1.00 m	SP MVX-0202	SP MVX-0302	SP MVX-0403	SP MVX-0603	SP MVX-0304
	B = 0.50 m	SP MVX-0101	—	—	—	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	30.7	32.0	28.3	32.0	46.8
				48.0	46.8	48.0
					55.0	58.7



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-0202	SP MVX-0302	SP MVX-0403	SP MVX-0603	SP MVX-0304
	B = 0.50 m			SP MVX-0101	—	—	—	—
	B = 0.25 m			—	—	—	—	—
Concrete cover [mm]	30	35	50					
			160	8.5	8.7	11.3	11.9	14.0
			160	8.9	9.2	12.1	12.7	14.8
			170	9.4	9.7	12.8	13.4	15.7
			170	9.9	10.2	13.6	14.1	16.5
			180	10.4	10.7	14.3	14.9	17.3
			180	10.9	11.2	15.0	15.6	18.2
			190	11.4	11.7	15.8	16.4	19.0
			190	11.9	12.2	16.5	17.1	19.9
			200	12.4	12.6	17.2	17.8	20.7
			200	12.9	13.1	18.0	18.6	21.5
			210	13.4	13.6	18.7	19.3	22.4
			210	13.9	14.1	19.5	20.0	23.2
			220	14.4	14.6	20.2	20.8	24.0
			220	14.8	15.1	20.9	21.5	24.9
			230	15.3	15.6	21.7	22.3	25.7
			230	15.8	16.1	22.4	23.0	26.4
			240	16.3	16.6	23.1	23.7	27.4
			240	16.8	17.1	23.9	24.5	28.2
			250	17.3	17.6	24.6	25.2	29.1
			250	17.8	18.1	25.4	25.9	29.9
			270	25.4	25.9	29.9	35.1	30.8
			> 250	Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.				



On-site reinforcement $A_{s,req}$

Edge frame	direct support		$\varnothing 6 / 25 \text{ cm}$
Suspension reinforcement	indirect support	$\varnothing 6 / 25 \text{ cm}$	$\varnothing 6 / 17.5 \text{ cm}$ $\varnothing 6 / 17 \text{ cm}$ $\varnothing 6 / 15 \text{ cm}$



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP MVX

1

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥C25/30



Type / Element width	B = 1.00 m	SP MV-0404	SP MV-0504	SP MV-0604	SP MV-0704	SP MV-0705	
	B = 0.50 m	SP MV-0202	—	SP MV-0302	—	—	
	B = 0.25 m	SP MV-0101	—	—	—	—	
Design values	v_{Rd} [kN/m]	61.4	64.0	62.4	64.0	78.0	80.0



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MV-0404	SP MV-0504	SP MV-0604	SP MV-0704	SP MV-0705					
	B = 0.50 m			SP MV-0202	—	SP MV-0302	—	—					
	B = 0.25 m			SP MV-0101	—	—	—	—					
Concrete cover [mm]	30	35	50										
Design values m_{Rd} [kNm/m] for slab thickness [mm]		160		16.9	17.4	19.0	20.8	19.1	23.9	19.1	25.9	23.9	28.4
	160		180	17.9	18.4	20.2	22.1	20.3	25.3	20.3	27.6	25.3	30.1
		170		18.9	19.4	21.3	23.3	21.4	26.8	21.4	29.2	26.7	31.8
	170		190	19.9	20.4	22.5	24.5	22.6	28.3	22.6	30.9	28.2	33.5
		180		20.8	21.4	23.6	25.7	23.7	29.8	23.7	32.5	29.6	35.2
	180		200	21.8	22.3	24.8	27.0	24.9	31.2	24.9	34.2	31.1	37.0
		190		22.8	23.3	25.9	28.2	26.0	32.7	26.0	35.9	32.5	38.7
	190		210	23.8	24.3	27.1	29.4	27.2	34.2	27.2	37.5	34.0	40.4
		200		24.8	25.3	28.2	30.7	28.3	35.7	28.3	39.2	35.4	42.1
	200		220	25.8	26.3	29.4	31.9	29.5	37.1	29.5	40.8	36.8	43.9
		210		26.7	27.3	30.5	33.1	30.6	38.6	30.6	42.5	38.3	45.6
	210		230	27.7	28.2	31.7	34.4	31.8	40.1	31.8	44.2	39.7	47.3
		220		28.7	29.2	32.8	35.6	32.9	41.6	32.9	45.8	41.2	49.0
	220		240	29.7	30.2	34.0	36.8	34.1	43.0	34.1	47.5	42.6	50.7
		230		30.7	31.2	35.1	38.0	35.3	44.5	35.3	49.1	44.0	52.5
	230		250	31.7	32.2	36.3	39.3	36.4	46.0	36.4	50.8	45.5	54.2
		240		32.6	33.2	37.4	40.5	37.6	47.5	37.6	52.5	46.9	55.9
	240		260	33.6	34.1	38.6	41.7	38.7	48.9	38.7	54.1	48.4	57.6
		250		34.6	35.1	39.7	43.0	39.9	50.4	39.9	55.8	49.8	59.3
	250		270	35.6	36.1	40.9	44.2	41.0	51.9	41.0	57.5	51.2	61.1
	> 250			Load bearing capacity values for further types (e.g. for h > 250mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.									



On-site reinforcement $A_{s,req}$

Edge frame	direct support		$\varnothing 6$ / 25 cm
Suspension reinforcement	indirect support	$\varnothing 6$ / 13.5 cm	$\varnothing 6$ / 13 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

MVX-OU/OOD

ZVX/ZDX

HT / EQ

AT / FT / OTX / FK

ST / WT

Building Physics

Planning

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



120

Type / Element width	B = 1.00 m	SP MVX-0805		SP MVX-0906		SP MVX-1006		SP MVX-0907		SP MVX-1007	
	B = 0.50 m	—		—		SP MVX-0503		—		—	
	B = 0.25 m	—		—		—		—		—	
Design values	v_{Rd} [kN/m]	78.0	80.0	93.7	96.0	93.7	96.0	109.3	112.0	109.3	112.0



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-0805		SP MVX-0906		SP MVX-1006		SP MVX-0907		SP MVX-1007	
	B = 0.50 m			—		—		SP MVX-0503		—		—	
	B = 0.25 m			—		—		—		—		—	
Concrete cover [mm]	30	35	50										
		160		23.9	31.2	28.6	35.8	28.6	38.5	33.4	37.2	33.4	40.3
	160		180	25.3	33.2	30.4	38.0	30.4	41.0	35.4	39.5	35.4	42.8
		170		26.7	35.1	32.1	40.2	32.1	43.4	37.4	41.7	37.4	45.2
	170		190	28.2	37.1	33.8	42.4	33.8	45.9	39.4	43.9	39.4	47.7
		180		29.6	39.1	35.5	44.6	35.5	48.3	41.4	46.1	41.4	50.1
	180		200	31.1	41.0	37.3	46.9	37.3	50.8	43.4	48.3	43.4	52.6
		190		32.5	43.0	39.0	49.1	39.0	53.3	45.5	50.5	45.5	55.1
	190		210	34.0	45.0	40.7	51.3	40.7	55.7	47.5	52.7	47.5	57.5
		200		35.4	46.9	42.5	53.5	42.5	58.2	49.5	55.0	49.5	60.0
	200		220	36.8	48.9	44.2	55.7	44.2	60.6	51.5	57.2	51.5	62.4
		210		38.3	50.9	45.9	57.9	45.9	63.1	53.5	59.4	53.5	64.9
	210		230	39.7	52.8	47.6	60.1	47.6	65.5	55.5	61.6	55.5	67.3
		220		41.2	54.8	49.4	62.3	49.4	68.0	57.5	63.8	57.5	69.8
	220		240	42.6	56.8	51.1	64.6	51.1	70.5	59.6	66.0	59.6	72.3
		230		44.0	58.7	52.8	66.8	52.8	72.9	61.6	68.2	61.6	74.7
	230		250	45.5	60.7	54.6	69.0	54.6	75.4	63.6	70.4	63.6	77.2
		240		46.9	62.7	56.3	71.2	56.3	77.8	65.6	72.7	65.6	79.6
	240		260	48.4	64.6	58.0	73.4	58.0	80.3	67.6	74.9	67.6	82.1
		250		49.8	66.6	59.7	75.6	59.7	82.8	69.6	77.1	69.6	84.6
	250		270	51.2	68.6	61.5	77.8	61.5	85.2	71.6	79.3	71.6	87.0
		> 250		Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.									



On-site reinforcement $A_{s,req}$

Edge frame	direct support	$\varnothing 6 / 25 \text{ cm}$				$\varnothing 6 / 24.5 \text{ cm}$
Suspension reinforcement	indirect support	$\varnothing 6 / 18.5 \text{ cm}$	$\varnothing 6 / 15.5 \text{ cm}$	$\varnothing 6 / 15 \text{ cm}$	$\varnothing 6 / 13.5 \text{ cm}$	$\varnothing 6 / 13 \text{ cm}$



All necessary verifications have already been considered. Connecting elements must be verified by the planner.



HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP MVX

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	SP MVX-1107	SP MV-1208	SP MVX-1209	SP MVX-1110	SP MVX-1112					
	B = 0.50 m	—	SP MV-0604	—	—	—					
	B = 0.25 m	—	SP MV-0302	—	—	—					
Design values	v_{Rd} [kN/m]	109.3	112.0	124.9	128.0	139.2	144.0	147.0	160.0	154.9	166.8



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-1107	SP MV-1208	SP MVX-1209	SP MVX-1110	SP MVX-1112					
	B = 0.50 m			—	SP MV-0604	—	—	—					
	B = 0.25 m			—	SP MV-0302	—	—	—					
Concrete cover [mm]	30	35	50										
Design values m_{Rd} [kNm/m] for slab thickness [mm]		160		33.4	43.1	38.2	46.0	39.1	43.1	37.7	39.2	36.3	37.9
	160		180	35.4	45.8	40.5	48.8	41.4	45.6	39.9	41.3	38.3	40.0
		170		37.4	48.6	42.8	51.6	43.7	48.1	42.0	43.5	40.3	42.0
	170		190	39.4	51.3	45.1	54.4	45.9	50.6	44.2	45.7	42.3	44.0
		180		41.4	54.0	47.4	57.2	48.2	53.0	46.3	47.8	44.2	46.0
	180		200	43.4	56.7	49.8	60.1	50.5	55.5	48.4	50.0	46.2	48.1
		190		45.5	59.4	52.1	62.9	52.8	58.0	50.6	52.2	48.2	50.1
	190		210	47.5	62.1	54.4	65.7	55.1	60.5	52.7	54.3	50.2	52.1
		200		49.5	64.8	56.7	68.5	57.4	63.0	54.8	56.5	52.1	54.2
	200		220	51.5	67.5	59.0	71.3	59.7	65.5	57.0	58.7	54.1	56.2
		210		53.5	70.2	61.3	74.1	62.0	68.0	59.1	60.8	56.1	58.2
	210		230	55.5	72.9	63.6	76.9	64.3	70.5	61.3	63.0	58.1	60.3
		220		57.5	75.6	65.9	79.7	66.6	72.9	63.4	65.2	60.1	62.3
	220		240	59.6	78.3	68.2	82.5	68.9	75.4	65.5	67.3	62.0	64.3
		230		61.6	81.0	70.5	85.3	71.1	77.9	67.7	69.5	64.0	66.3
	230		250	63.6	83.7	72.8	88.1	73.4	80.4	69.8	71.7	66.0	68.4
		240		65.6	86.4	75.1	90.9	75.7	82.9	71.9	73.8	68.0	70.4
	240		260	67.6	89.1	77.4	93.7	78.0	85.4	74.1	76.0	69.9	72.4
		250		69.6	91.8	79.8	96.5	80.3	87.9	76.2	78.2	71.9	74.5
	250		270	71.6	94.5	82.1	99.3	82.6	90.3	78.4	80.3	73.9	76.5
	> 250			Load bearing capacity values for further types (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) can be found in the type tests at www.halfen.com or on request. See inside back cover for contact information.									



On-site reinforcement $A_{s,req}$

Edge frame	direct support	ø6 / 23.5 cm	ø6 / 21 cm	ø6 / 19.5 cm	ø6 / 19 cm	ø6 / 17.5 cm
Suspension reinforcement	indirect support	ø6 / 13 cm	ø6 / 11.5 cm	ø6 / 10.5 cm	ø6 / 10 cm	ø6 / 9.5 cm



All necessary verifications have already been considered. Connecting elements must be verified by the planner.




HALFEN HIT software is available at www.halfen.com to calculate connections for balcony projects.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP MVX, HIT-SP MVX

Product description – Cross-sections

HIT-HP MVX – High Performance

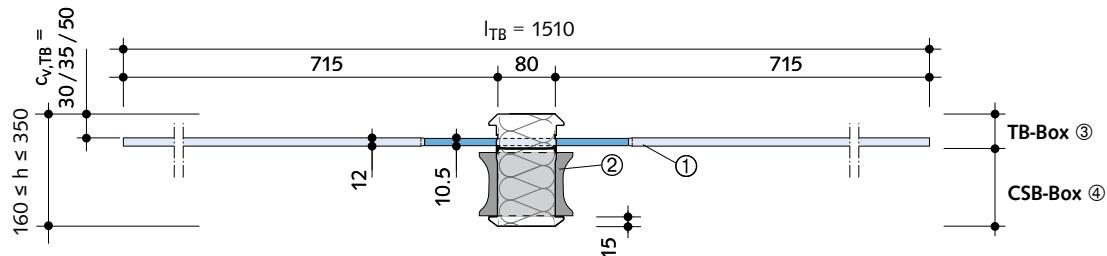

HIT-SP MVX – Superior Performance

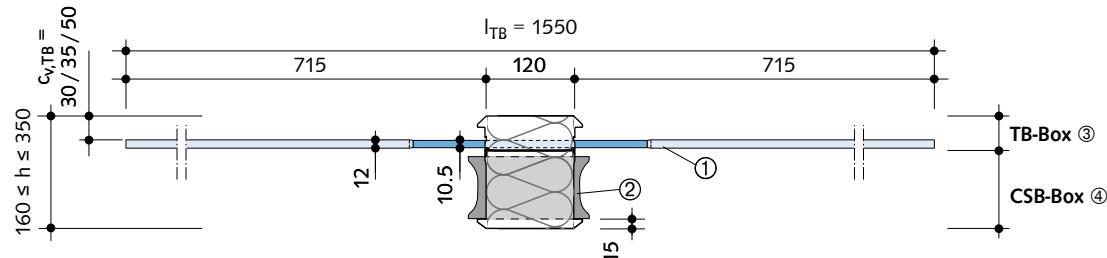

Dimensions in [mm]

- ① Tension bars Ø12 mm / 10.5 mm in the joint
- ② Double-symmetrical Compression shear bearings CSB
- ③ Tension bar box
- ④ Compression shear bearings box

Product description – Top view (examples)

The layout of the tension bars and the CSB has been optimized when cutting the element to size is required. With an even number of support elements these are grouped in sections; this simplifies cutting the elements.

HIT-HP/SP - MVX 0404 - ... - 100

HIT-HP/SP - MVX 0202 - ... - 050



HIT-HP/SP - MVX 0101 - ... - 025



For a top view of other units with dimensions please refer to the relevant type test.

HIT-HP/SP - MVX 0606 - ... - 100

HIT-HP/SP - MVX 0303 - ... - 050

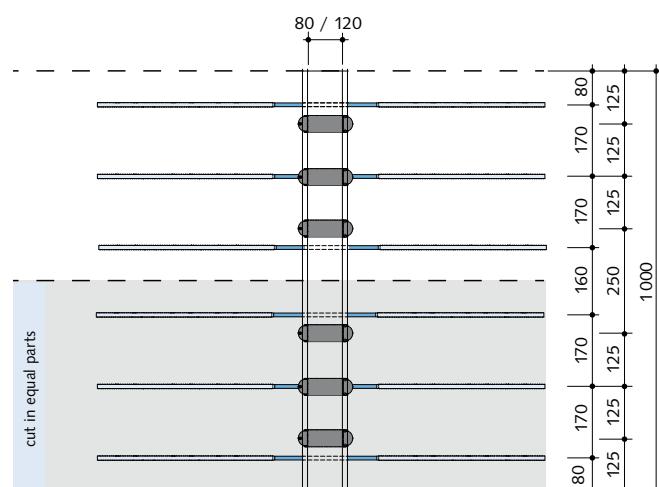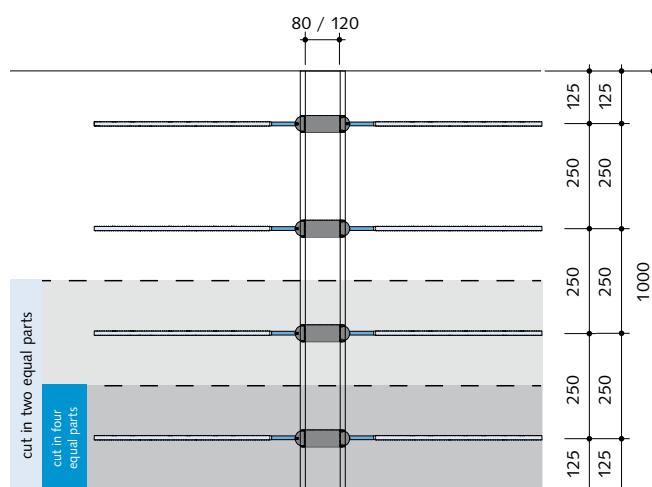


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX-ES, HIT-SP MVX-ES

Application for element slabs – Cross sections

HIT-HP MVX-ES – High Performance multi-part design for element slabs

See tables on pages 14 to 27 for load bearing capacities

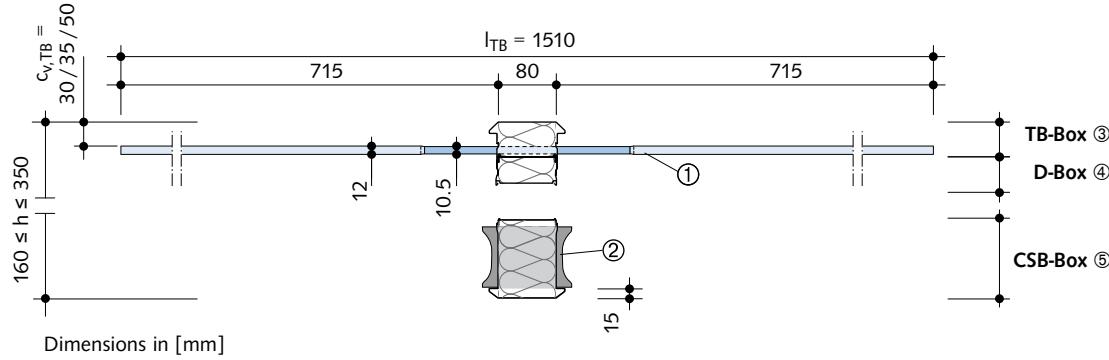


- ① Tension bars $\varnothing 12 \text{ mm} / 10.5 \text{ mm}$ in the joint
- ② Double-symmetrical Compression shear bearings CSB
- ③ Tension bar box
 $h = 50 \text{ mm}$ with $c_v 30/35 \text{ mm}$
 $h = 70 \text{ mm}$ with $c_v 50 \text{ mm}$

- ④ Distance box as height compensation
 $h = 20 \text{ mm}$ and higher (\rightarrow see page 30)
- ⑤ Compression shear bearings box
 $h = 110 \text{ mm}$

HIT-SP MVX-ES – Superior Performance multi-part design for element slabs

See pages from 24 for load bearing capacities tables

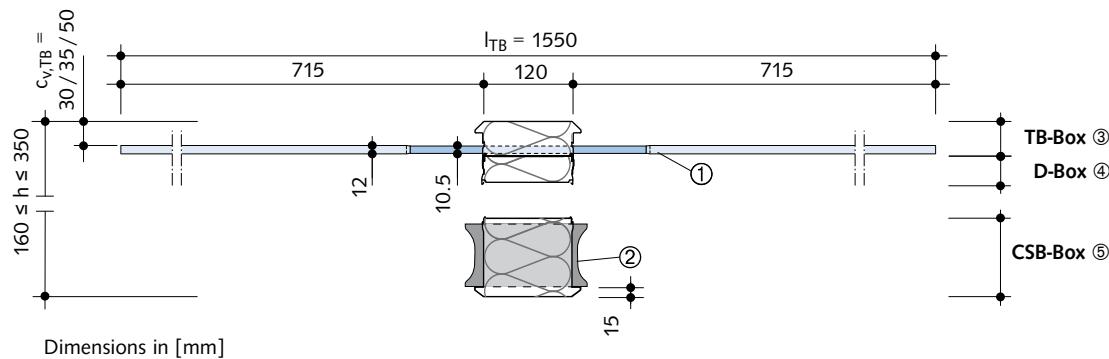

- ① Tension bars $\varnothing 12 \text{ mm} / 10.5 \text{ mm}$ in the joint
- ② Double-symmetrical Compression shear bearings CSB
- ③ Tension bar box
 $h = 50 \text{ mm}$ with $c_v 30/35 \text{ mm}$
 $h = 70 \text{ mm}$ with $c_v 50 \text{ mm}$


- ④ Distance box as height compensation
 $h = 20 \text{ mm}$ and higher (\rightarrow see page 30)
- ⑤ Compression shear bearings box
 $h = 110 \text{ mm}$

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX-ES, HIT-SP MVX-ES

Ordering example – Multi-part design

upper part	HIT- HP	M_	- 08 _	- 05	- 100	- 35	- TB
centre part	HIT- HP	—	— —	- 04	- 100	-	- DB
base part	HIT- HP	_ VX	- _ 05	- 11	- 100	-	- CSB
<hr/>							
Σ	HIT- HP	MVX	- 08 05	- 20	- 100	- 35	- ES
(HIT-HP MVX-ES)	↓	↓	↓	↓	↓	↓	↓
	①	②	③	④ ⑤	⑥	⑦	⑧ ⑨

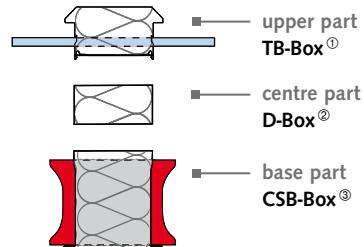

- ① Tension bar box
- ② Distance box
- ③ Compression shear bearings box



Type designation

- | | |
|---|--------------------------------|
| ① Product group | ⑥ Element height [cm] |
| ② Joint spacing 80 mm (HP) or 120 mm (SP) | ⑦ Element width [cm] |
| ③ Connection type | ⑧ Concrete cover (top) [mm] |
| ④ Number of tension bars | ⑨ For element slab design only |
| ⑤ Number of compression shear units CSB | |

Height TB-Box [mm]		Height D-Box [mm]										Height CSB-Box [mm]					
$c_v=30/35$	50	Slab height	160	170	180	190	200	210	220	230	240	250	Slab height	160	170	180	190
		$c_v=30/35$	-	-	20	30	40	50	60	70	80	90	$c_v=30/35$	110	120	110	110
$c_v=50$	70	$c_v=50$	-	-	-	-	20	30	40	50	60	70	$c_v=50$	-	-	110	120

Pressure joints in element slabs

Typical connections for HIT-HP/SP MVX with element slabs with a structural cast-in-place concrete layer

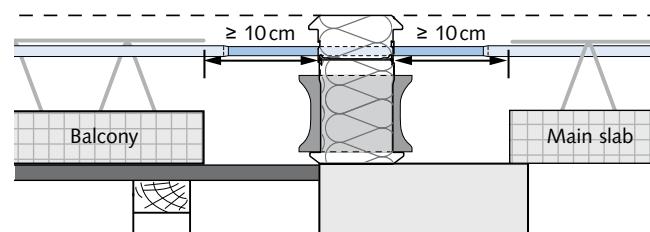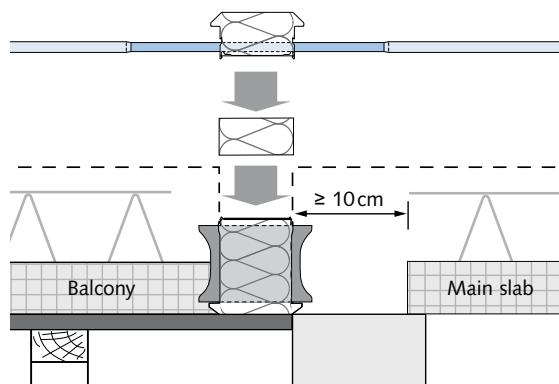

To create a positive connection a total distance of at least 10 cm between insulation element and precast unit has to be maintained. Detailed information for reinforcement layout can be found in approvals ETA-13/0546 and Z-15.7-293. The approvals are available for download at www.halfen.com.



HALFEN INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX-COR, HIT-SP MVX-COR


- Symmetrical connection for cantilevered corner balcony slabs
- Transfer of bending moments as well as positive and negative shear forces



type-tested

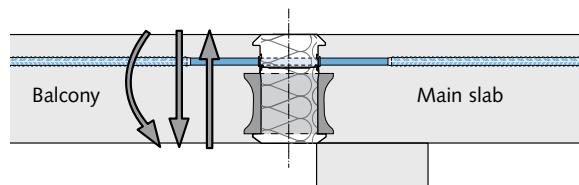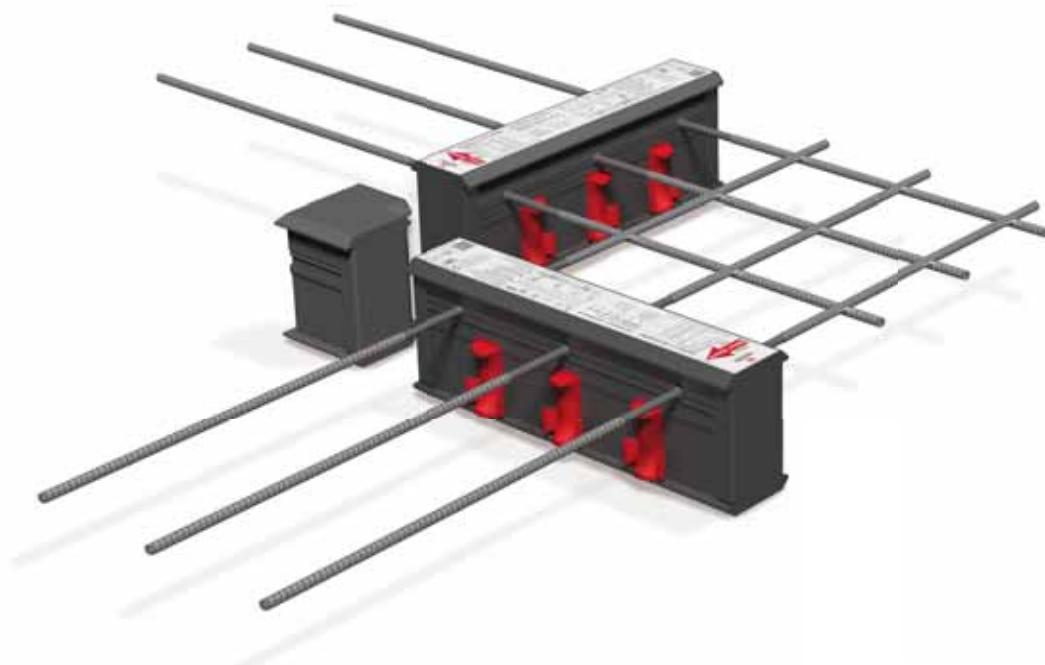

HIT-HP MVX – High Performance with insulation thickness 80 mm
HIT-SP MVX – Superior Performance with insulation thickness 120 mm
Both types are also available as multi-part types (-ES) for element slabs.

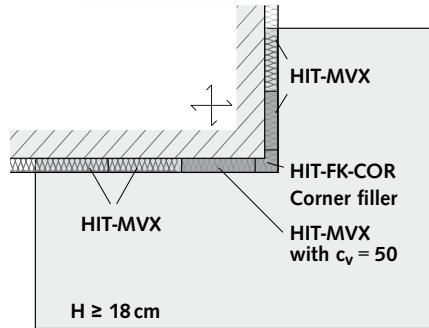

Application example: outer corner

1

MVX-COR

2

MVX-OU/OD
ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8
Building Physics,
Planning




Content	Type	Page
Elements for corner balconies	HIT-HP COR, HIT-SP COR	32
Cantilever lengths, usability		33
On-site connecting reinforcement, installation diagram		34
Joint spacings and edge distances		38
Camber		39

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX-COR, HIT-SP MVX-COR

Elements for corner balconies

In addition to the type-tested connections a corner situation may be constructed (taking the occurring moments and the positive and negative shear forces into account) using HIT-HP MVX or HIT-SP MVX standard elements in 0.5m or 1.0m lengths.

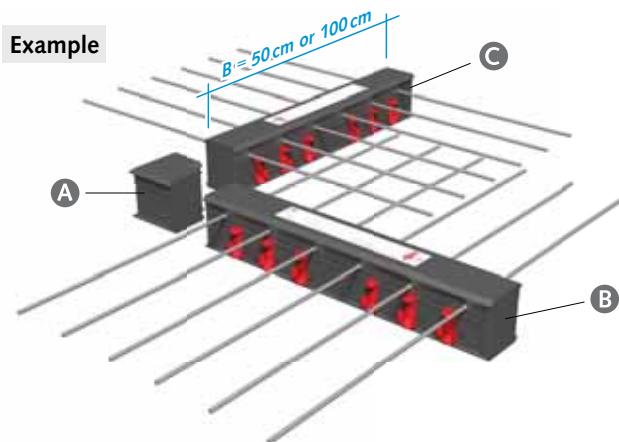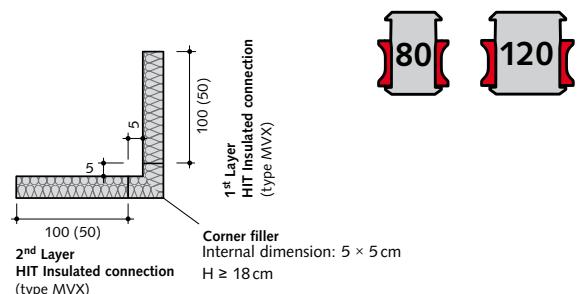

- A Corner filler
- B HIT-MVX Standard element, 1st layer reinforcement ($c_v = 30 \text{ mm} - 35 \text{ mm}$)
- C HIT-MVX Standard element, 2nd layer reinforcement ($c_v = 50 \text{ mm}$)

A	HIT-HP	FK	-	20	-		COR - ES
B	HIT-HP	MVX	-	20	-	100	-
C	HIT-HP	MVX	-	20	-	100	-
				5		50	
				6		7	
				8		8	
				9		9	
				10			

Type designation

- | | |
|---|--------------------------------|
| ① Product group | ⑥ Element height [cm] |
| ② Joint spacing 80 mm (HP) or 120 mm (SP) | ⑦ Element width [cm] |
| ③ Connection type | ⑧ Concrete cover (top) [mm] |
| ④ Number of tension bars | ⑨ For corner application only |
| ⑤ Number of double symmetrical CSB | ⑩ For element slab design only |

Exemplary load bearing capacity values HIT-HP MVX COR



Shear capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m			HP MVX-0706	HP MVX-0806	HP MVX-0906			
	B = 0.50 m								
	B = 0.25 m								
Design values	v _{Rd} [kN/m]			96.0	96.0				



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			HP MVX-0706	HP MVX-0806	HP MVX-0906			
	B = 0.50 m								
	B = 0.25 m								
Concrete cover [mm]	30	35	50						
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160	180	21.9 23.1 24.3	22.4 23.6 24.9	25.4 26.8 28.3	26.1 27.6 29.1			
	170			28.5 30.3 32.0	29.6 31.3 33.0	31.4 33.4 35.4			
					32.8 34.8 36.8	34.0 36.2 38.5			
						35.8 38.0 40.2			

All load bearing capacity values and connecting reinforcement → pages 14–27 (value $c_v = 50 \text{ mm}$ is decisive)


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

Span-to-depth ratio

The maximum cantilever lengths max. l_k [m] are shown in the table below; these are based on EN 1992-1-1 (EC2). The cantilever length l_k should be calculated as shown in the diagram below. Interim values have to be interpolated.

Maximum cantilever length l_k [m]	Slab thickness h [cm] of concrete slab										
	16	17	18	19	20	21	22	23	24	25	
Concrete cover [cm]	$c_v = 3.0$	1.74	1.88	2.02	2.16	2.30	2.44	2.58	2.72	2.86	3.00
	$c_v = 3.5$	1.67	1.81	1.95	2.09	2.23	2.37	2.51	2.65	2.79	2.93
	$c_v = 5.0$	-	1.60	1.74	1.88	2.02	2.16	2.30	2.44	2.58	2.72

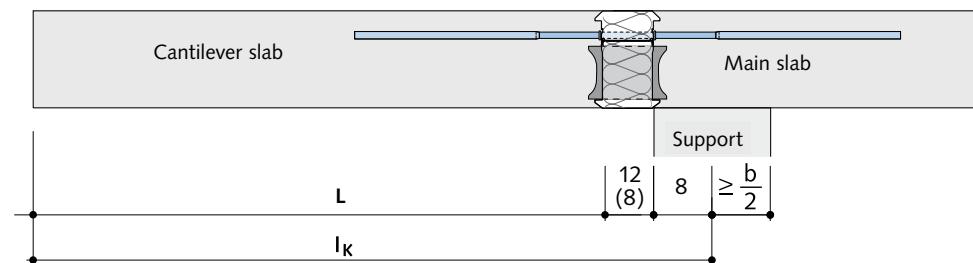


l_k = Cantilever length [m]
 b = Support width [cm]

Connecting reinforcement

No. of tension bars n_{TB}/m	$a_{s,TB}$ [cm 2]	Variation A: mesh	Variation B: steel bars	Variation C: combined mesh and steel bars
2	2,26	R257 A	$\varnothing 8/22$ cm	-
3	3,39	R335 A	$\varnothing 10/23$ cm	R188 A + $\varnothing 8/25$ cm
4	4,52	R524 A	$\varnothing 10/17$ cm	R188 A + $\varnothing 8/18$ cm
5	5,65	Q636 A	$\varnothing 10/13,5$ cm	R188 A + $\varnothing 8/13$ cm
6	6,79	-	$\varnothing 10/11,5$ cm	R188 A + $\varnothing 8/10$ cm
7	7,92	-	$\varnothing 10/ 9,5$ cm	R188 A + $\varnothing 10/12,5$ cm
8	9,05	-	$\varnothing 12/12,5$ cm	R257 A + $\varnothing 10/12$ cm
9	10,18	-	$\varnothing 12/11$ cm	R257 A + $\varnothing 10/10$ cm
10	11,31	-	$\varnothing 12/10$ cm	R257 A + $\varnothing 10/9$ cm
11	12,44	-	$\varnothing 12/ 9$ cm	R335 A + $\varnothing 12/12$ cm
12	13,57	-	$\varnothing 12/ 8$ cm	R335 A + $\varnothing 12/11$ cm
13	14,70	-	$\varnothing 12/ 7,5$ cm	R335 A + $\varnothing 12/10$ cm
14	15,83	-	$\varnothing 12/ 7$ cm	R524 A + $\varnothing 12/10$ cm
16	18,10	-	$\varnothing 12/ 6$ cm	Q636 A + $\varnothing 12/9,5$ cm
18	20,36	-	$\varnothing 12/ 5,5$ cm	Q636 A + $\varnothing 12/6,5$ cm

Main slab thickness h 160 – 350 mm

Recommendation for on-site reinforcement (constructive selected): aligned butted surfaces, $a_{s,TB} \leq a_{s,overlap}$

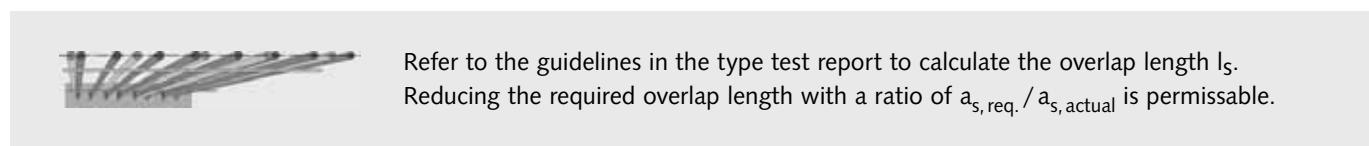


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP MVX, HIT-SP MVX

On-site reinforcement for direct and indirect support

Longitudinal section

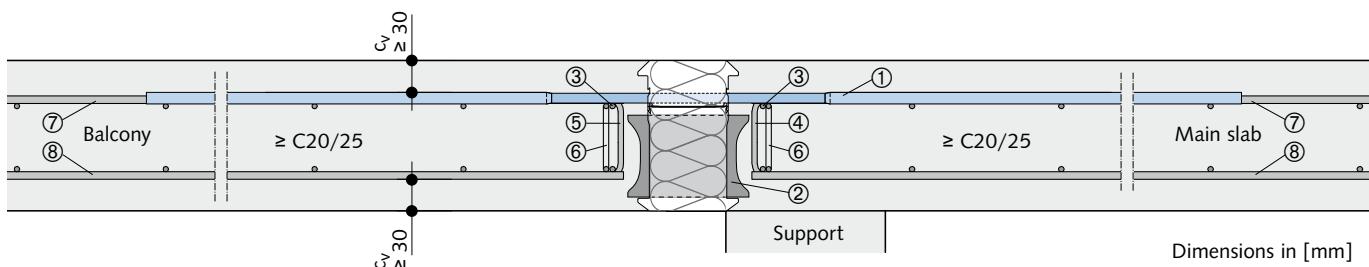

Reinforcement detail

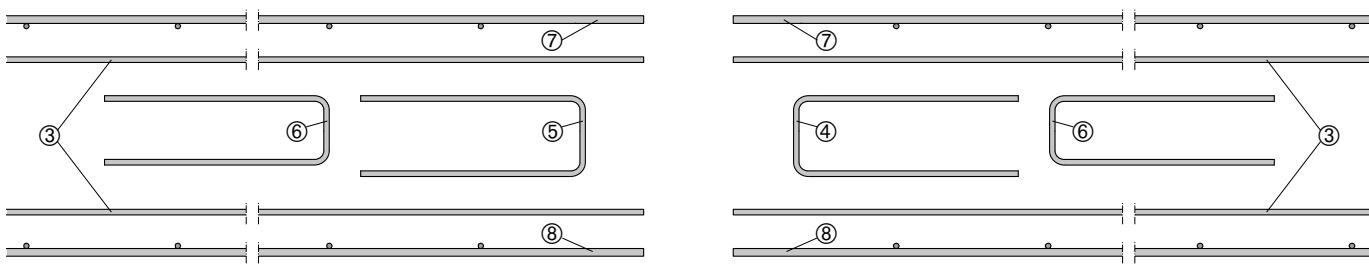

Legend: Section / Reinforcement detail

- | | |
|---|--|
| ① Tension bar | ⑥ Stirrups as end anchorage for the transverse tensile reinforcement → ③ |
| ② Double-symmetrical CSB | ⑦ Upper connecting reinforcement made of steel bars or mesh (→ page 33) |
| ③ Horizontal transverse tensile reinforcement $A_{s,h}$ min. 2 Ø8 | ⑧ Lower connecting reinforcement made of steel bars or mesh |
| ④ Vertical tensile splitting reinforcement $A_{s,v}$ min. Ø6 / 25, see also → pages 14–27 | |
| ⑤ Vertical tensile splitting reinforcement $A_{s,v}$ min. Ø6 / 25, see also → pages 14–27 | |



Stirrups as edge reinforcement

According to EN 1992-1-1 and EN 1992-1-1/NA stirrups need to be installed in the outer edge of the balcony.




Indirect support

For indirect support a suspension reinforcement is placed in addition to the vertical tensile splitting reinforcement (Position ④). Please note the respective load bearing capacity values (→ pages 14–27)

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

Installation diagram

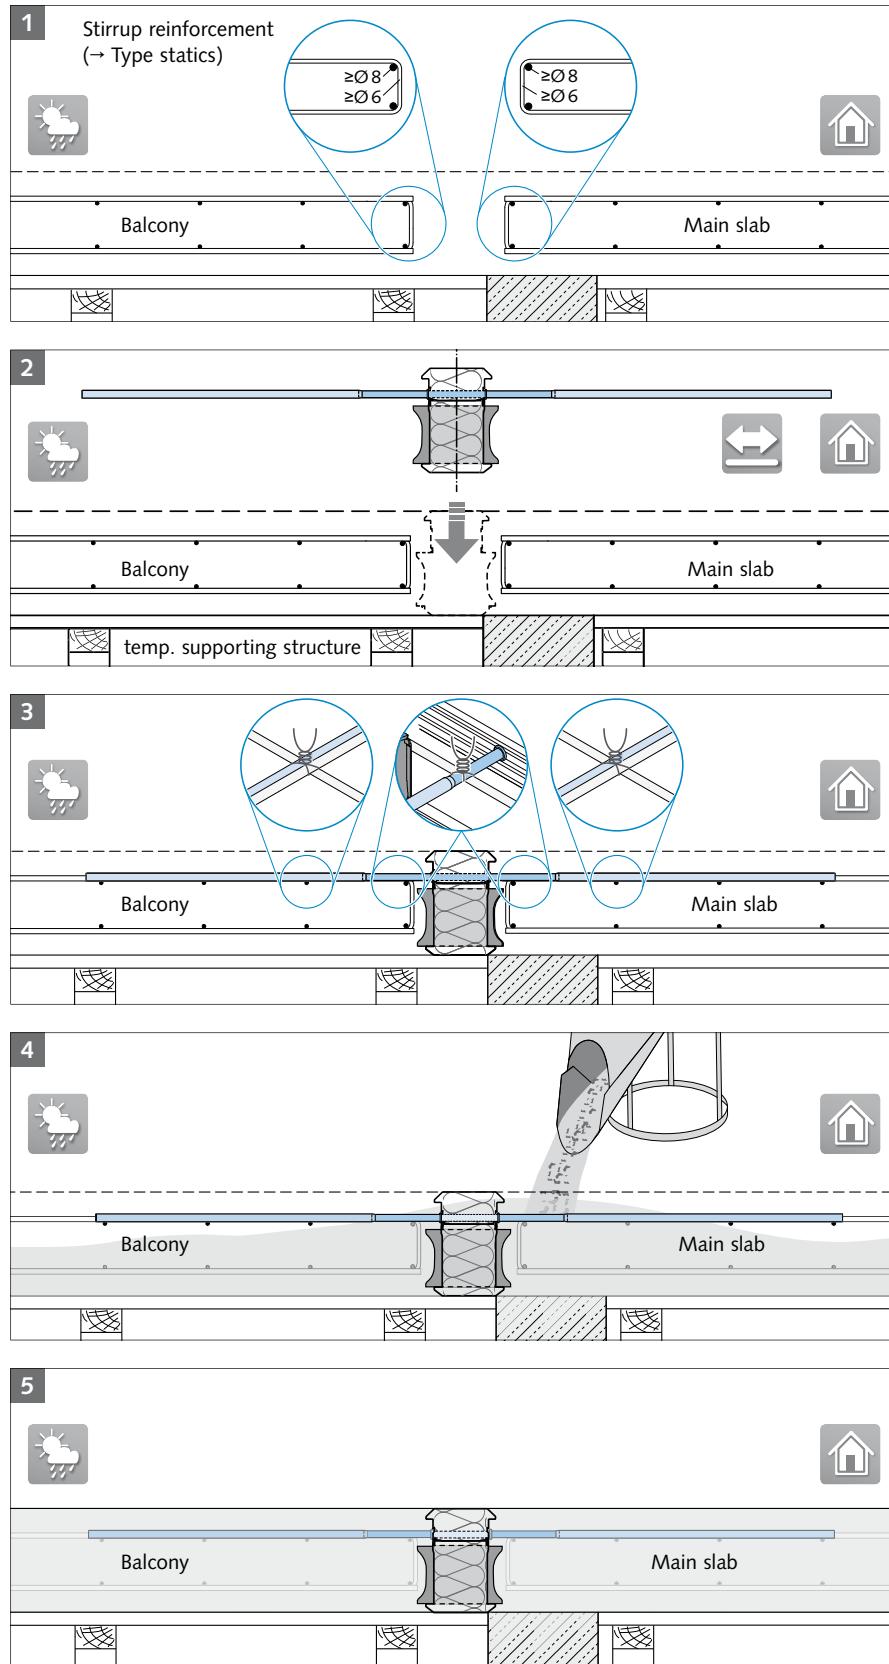

1 Installation of on-site reinforcement





The on-site reinforcement must be placed as specified by the structural engineer.

2 Installation of the HIT Element from above



The HIT-MVX Element is symmetrical; therefore, both installation directions are correct (custom solutions may vary).

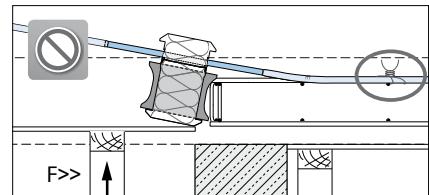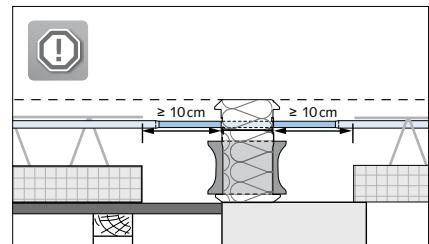

! Ensure that the formwork is at the correct height!

3 Fix the HIT Tension bars to on-site reinforcement using tying wire

4 Pour the concrete



To ensure the HIT Elements are not displaced, pour and compact the concrete evenly. Secure the HIT Elements against movement.

5 Freshly concreted balcony slab on supporting structure




For further installation instructions please go to www.halfen.com.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX


Installation diagram; precast plant

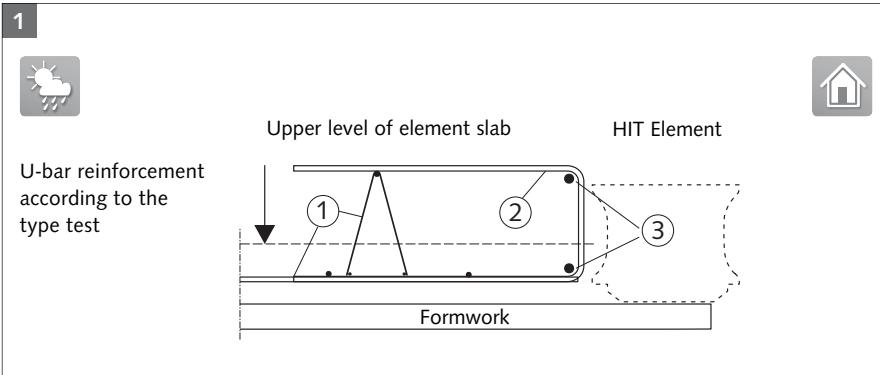

1 Installation of the element slab reinforcement

- ① Install the lower balcony slab reinforcement including lattice girder.
- ② Install the vertical tensile splitting reinforcement $A_{s,v}$.
- ③ Install the horizontal transverse tensile reinforcement $A_{s,h}$ (min. Ø 8 mm), if required with end anchorage.


⚠️ The on-site reinforcement must be placed as specified by the structural engineer.

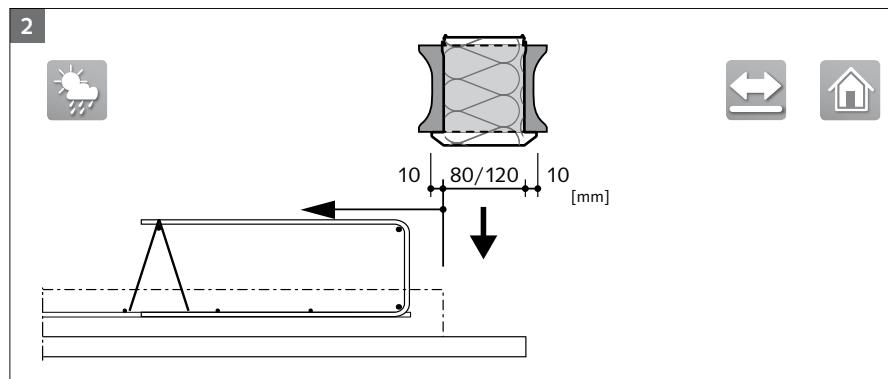


2 Installation of the CSB-Box

The HIT-MVX Element is symmetrical; therefore, both installation directions are correct (custom solutions may vary).

⚠️ Ensure all HIT Elements are securely positioned.

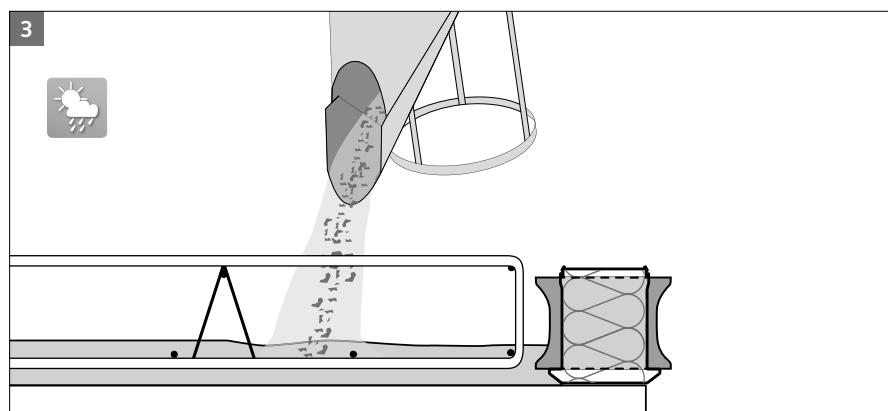

3 Pour the concrete for the element slab

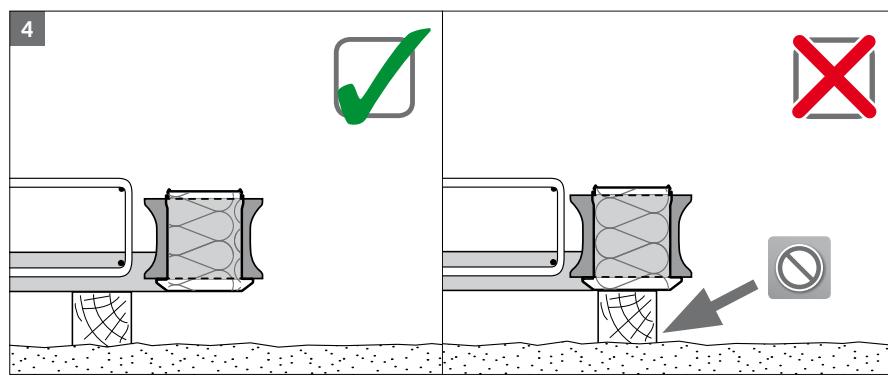

4 Transport to the construction site


Ensure elements are properly secured during transport.
Do not rest concrete element slabs on other exposed HIT Elements.

⚠️ Never place temporary supports under the HIT Elements!

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

Installation diagram; construction site

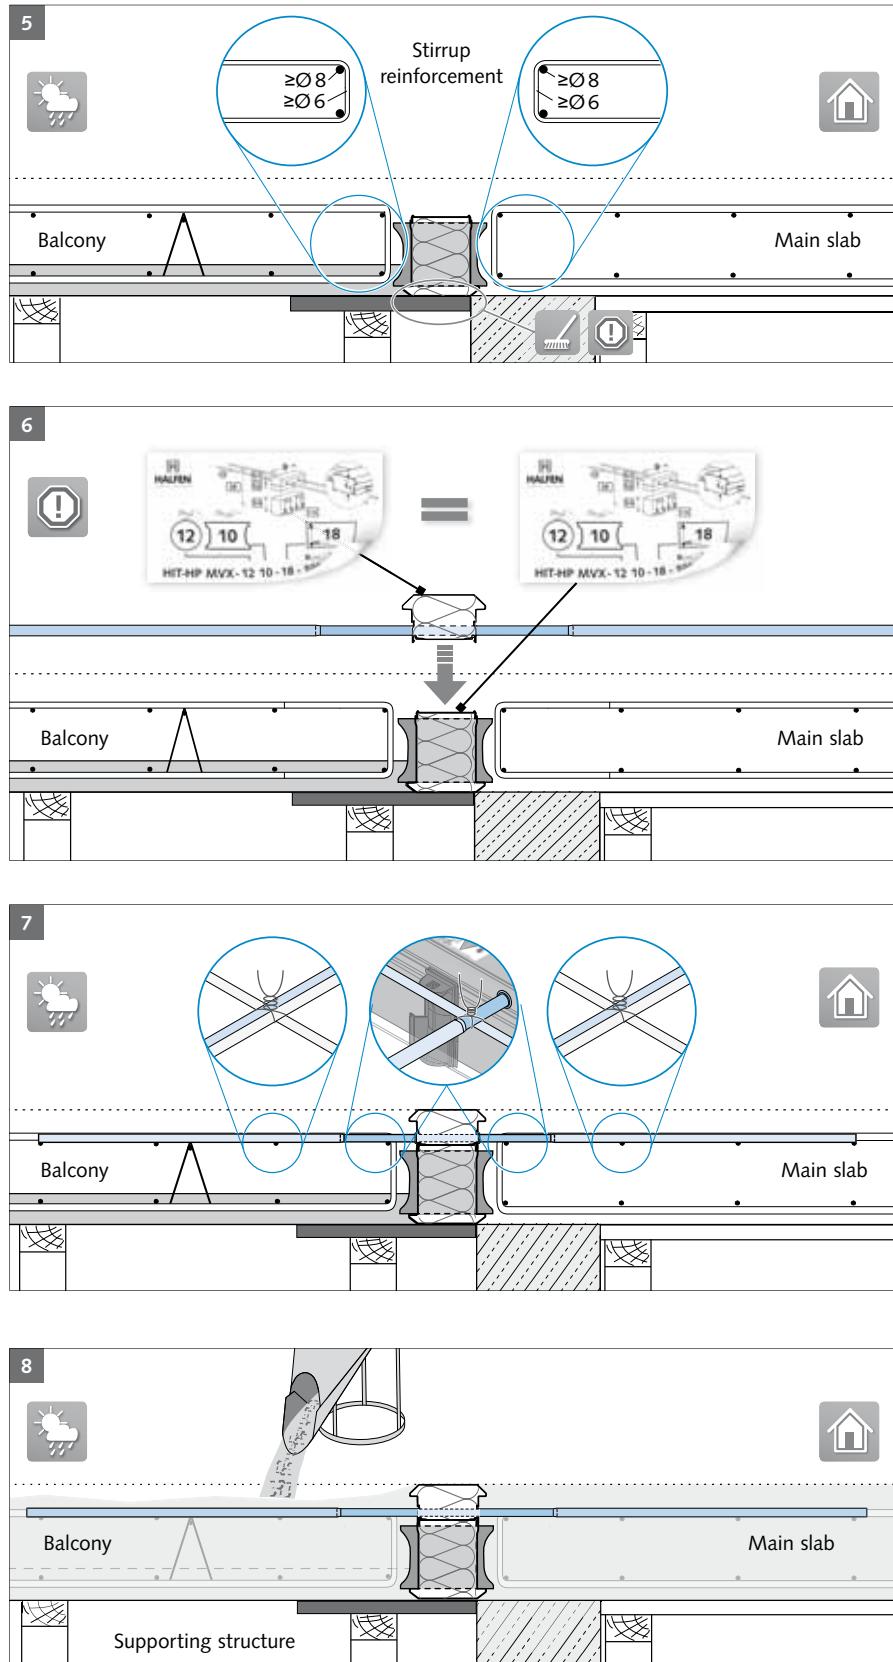


5 Install the on-site element slab reinforcement

⚠️ The on-site reinforcement must be placed as specified by the structural engineer.

Storage and transport

Ensure elements are properly secured during transport. Do not rest concrete element slabs on exposed HIT Elements.

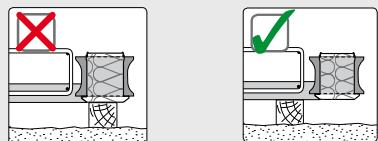

⚠️ Never place temporary supports under the HIT Elements!

6 Install the tension bar box

CSB-Boxes and tension bar boxes may only be connected with each other if they are **identically marked**. Make sure the CSB-Box is supported over its whole length during installation. First the tension bar box is fixed at one end then pressed against the CSB-Box until it snaps into place along the whole length of the element.

7 Fix the HIT Tension bars to on-site reinforcement using tying wire.


8 Pour the concrete

Freshly concreted balcony slab on supporting structure

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

Joint spacings

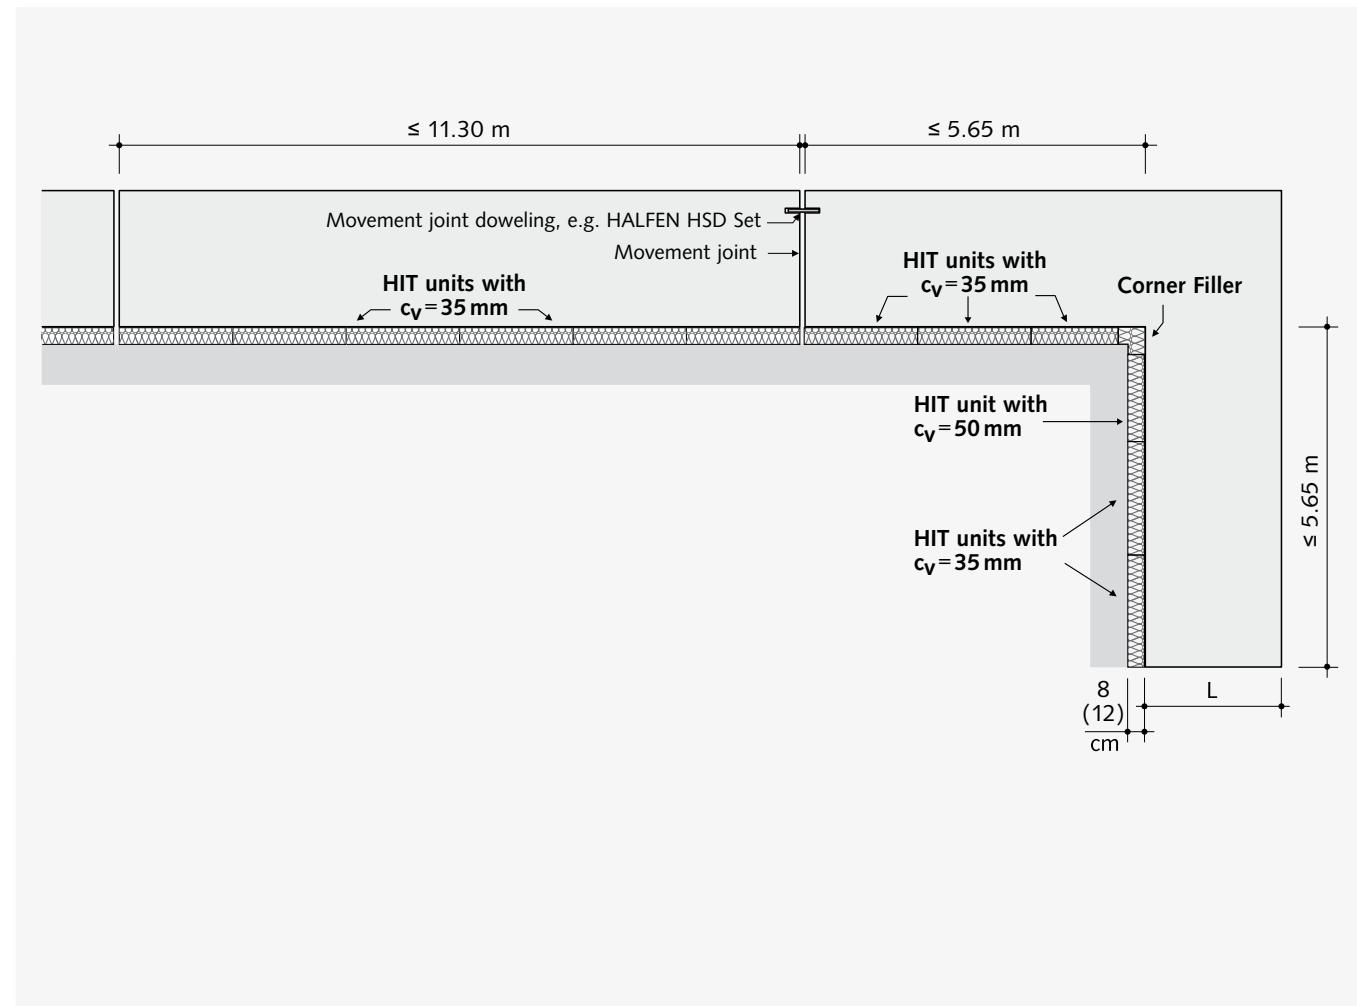

Note: Observe the expansion joints

According to the National Technical Approval, **expansion joints must be provided** in the external concrete components at a right angle to the insulation line of the HIT Elements. In straight, cantilevered balcony slabs the distance between joints must not exceed 11.30m.

In balcony structures extending past an outer corner an expansion joint must be planned at least every 11.3 m / 2 = 5.65 m.

For inside corners the limit is 5.65 m for each length.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP MVX, HIT-SP MVX

Deflection of the balcony slab

To limit flexure we recommend under-exaggerating the planned drainage flow when casting cantilevered slabs. The calculable increase in camber results from component deformation according to EN 1992-1-1 and EN 1992-1-1/NA, plus the deformation \ddot{u} of the HIT Elements.

The coefficient factor for camber increase \ddot{u}^* on page 40 refers **only to deformation** in HALFEN HIT Elements HIT-HP/SP MVX at maximum performance in a quasi-permanent load-combination for the following boundary limits: folgende Randbedingungen:

- $G_k = 0.6 (G_k + Q_k)$
- $Q_k = 0.4 (G_k + Q_k)$
- $\psi_2 = 0.3$

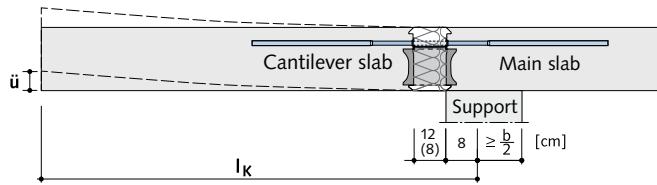

System assumptions

Cantilever length balcony	l_k	[m]	1.9
Slab thickness	h	[cm]	18
Concrete cover	c_{nom}	[mm]	35
Concrete strength	C25/30		

Load assumptions

Dead load of balcony slab	g_k	[kN/m ²]	4.5
Dead load of decking	$g_{k,Bel}$	[kN/m ²]	1.5
Traffic load on balustrade	$g_{k,Gel}$	[kN/m]	1.5
Traffic load	q_k	[kN/m ²]	4.0

Internal force variables

Bending moment dead load	$m_{G,k}$	[kNm/m]	13.68
Bending moment live load	$m_{Q,k}$	[kNm/m]	7.22
Shear force dead load	$v_{k,EG}$	[kN/m]	12.9
Shear force traffic load	$v_{k,VL}$	[kN/m]	7.6
Bending moment	m_{Ed}	[kNm/m]	29.3
Shear force	v_{Ed}	[kN/m]	28.8

When considering the partial safety factor this results in a ratio of the quasi-permanent load-combination $E_{d,perm}$ to the limit of load capacity R_d of:

$$E_{d,perm} = 0.524 R_d$$

The coefficient factor \ddot{u}^* for camber increase refers to maximum moment load capacity in the HALFEN Insulated connection. It is recommended to consider each present load-combination $E_{d,perm}$ when calculating the camber increase \ddot{u} .

$$\ddot{u} [\text{mm}] = \ddot{u}^* \times l_k [\text{m}] \times 10 \times \frac{m_{Ed,perm}}{(0.524 \times m_{Rd})}$$

with \ddot{u}	Camber from HIT components deformation in [mm]
\ddot{u}^*	Camber coefficient → see page 40
l_k	Span of cantilever slab in [m]
m_{Rd}	Design value of the load bearing capacity in [kNm/m]
$m_{d,perm}$	Bending moment at maximum performance (quasi-permanent combination) in [kNm/m]

HALFEN HIT Insulated connection type

HIT-HP MVX-0604-18-100-35

Moment bearing capacity m_{Rd} [kNm/m] 29.8 > 29.3

Shear capacity v_{Rd} [kN/m] 64.0 > 28.8

Quasi-permanent load combination with $\psi_2 = 0.3$

Bending moment under quasi-permanent load combination

$$\begin{aligned} m_{Ed,perm} &= (g_k + g_{k,Bel} + \psi_2 \times q_k) \times l_k^2 / 2 + g_{k,Gel} \times l_k \\ &= (4.5 + 1.5 + 0.3 \times 4.0) \times 1.9^2 / 2 + 1.5 \times 1.9 \\ &= 15.8 \text{ kNm/m} \end{aligned}$$

Camber coefficient $\ddot{u}^* = 0.82\%$

read from table for: $h = 180$ and $n_{TB} = 6$

Camber from HIT components deformation

$$\begin{aligned} \ddot{u} &= \ddot{u}^* \times l_k \times 10 \times m_{Ed,perm} / (0.524 \times m_{Rd}) \\ &= 0.82 \times 1.9 \times 10 \times 15.8 / (0.524 \times 29.8) \\ &= 15.8 \text{ mm} \\ &= 1.6 \text{ cm} \end{aligned}$$



Note: Observe the deflections limits according to EN 1992-1-1 and EN 1992-1-1/NA → page 33

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MVX, HIT-SP MVX

HIT-HP: Camber coefficient $\ddot{\nu}^*$ [%] at maximum element load bearing capacity (M_{Rd})								
2 MVX-OU/OD	Slab thickness h [mm]			Number of tension bars n_{TB} per metre of element				
	Concrete cover [mm]			$n_{TB} \leq 8$ tension bars per metre at concrete strength C20/25		$n_{TB} > 8$ tension bars per metre at concrete strength C20/25		
	30	35	50		$\geq C25/30$		$C20/25$	$\geq C25/30$
	160			0.95	0.99		0.83	0.94
	160		180	0.90	0.94		0.78	0.89
		170		0.86	0.89		0.74	0.85
	170		190	0.82	0.85		0.71	0.81
		180		0.79	0.82		0.68	0.77
	180		200	0.75	0.78		0.65	0.74
		190		0.72	0.75		0.62	0.71
	190		210	0.70	0.72		0.60	0.68
		200		0.67	0.70		0.58	0.65
	200		220	0.65	0.67		0.55	0.63
		210		0.63	0.65		0.53	0.61
	210		230	0.60	0.63		0.52	0.59
		220		0.59	0.61		0.50	0.57
	220		240	0.57	0.59		0.48	0.55
		230		0.55	0.57		0.47	0.53
	230		250	0.53	0.56		0.45	0.52
		240		0.52	0.54		0.44	0.50
	240		260	0.50	0.52		0.43	0.49
		250		0.49	0.51		0.42	0.47
	250		270	0.48	0.50		0.41	0.46

HIT-SP: Camber coefficient $\ddot{\nu}^*$ [%] at maximum element load bearing capacity (M_{Rd})								
5 HT / EQ	Slab thickness h [mm]			Number of tension bars n_{TB} per metre of element				
	Concrete cover [mm]			$n_{TB} \leq 8$ tension bars per metre at concrete strength C20/25		$n_{TB} > 8$ tension bars per metre at concrete strength C20/25		
	30	35	50		$\geq C25/30$		$C20/25$	$\geq C25/30$
	160			1.04	1.11		0.89	1.05
	160		180	0.99	1.05		0.84	0.99
		170		0.95	1.00		0.80	0.95
	170		190	0.90	0.96		0.76	0.90
		180		0.86	0.92		0.73	0.86
	180		200	0.83	0.88		0.70	0.83
		190		0.79	0.84		0.67	0.79
	190		210	0.76	0.81		0.65	0.76
		200		0.74	0.78		0.62	0.73
	200		220	0.71	0.75		0.60	0.71
		210		0.69	0.73		0.58	0.68
	210		230	0.66	0.70		0.56	0.66
		220		0.64	0.68		0.54	0.64
	220		240	0.62	0.66		0.52	0.62
		230		0.60	0.64		0.51	0.60
	230		250	0.58	0.62		0.49	0.58
		240		0.57	0.60		0.48	0.56
	240		260	0.55	0.59		0.46	0.55
		250		0.54	0.57		0.45	0.53
	250		270	0.52	0.56		0.44	0.52

 The camber $\ddot{\nu}^*$ is given for each slab thickness, for ≤ 8 tension bars per metre and > 8 per metre accordingly.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE




HIT-HP MVX-OU, HIT-SP MVX-OU

2

- For cantilevered balcony slabs with height offset (balcony higher than main slab) or upward wall connections
- Transfer of bending moments and bidirectional shear forces



type-tested

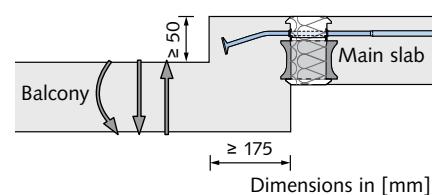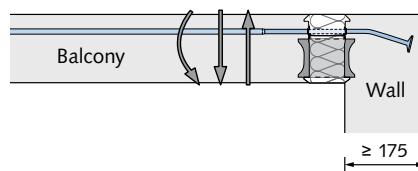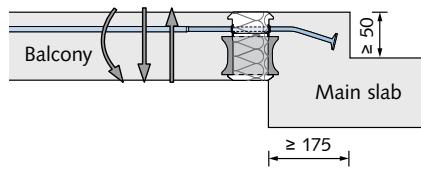

HIT-HP MVX-OU – High Performance 80 mm insulation thickness

HIT-SP MVX-OU – Superior Performance 120 mm insulation thickness

Both types are also available as multi-part design (-ES) for element slabs.

HIT-HP/SP MVX-OD as custom design
→ page 52

Content	Type	Page
Product types / Load range	HIT-HP/SP MVX-OU	43
Load bearing capacity values	HIT-HP/SP MVX-OU	44
Product description	HIT-HP/SP MVX-OU	52
On-site reinforcement	HIT-HP/SP MVX-OU	53
Installation diagram	HIT-HP/SP MVX-OU	55

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR
HIT-HP MVX-OD, HIT-SP MVX-OD




- For cantilevered balcony slabs with height offset (balcony lower than main slab) or downward wall connections
- Transfer of bending moments and bidirectional shear forces



4 DD

5 HT / EQ

6 AT / FT / OTX / FK

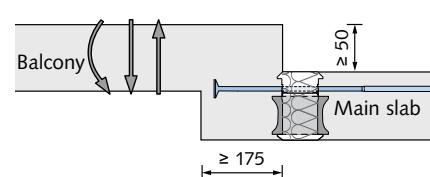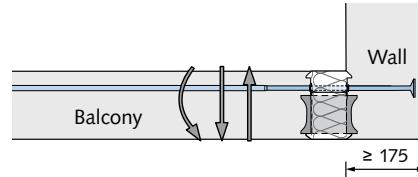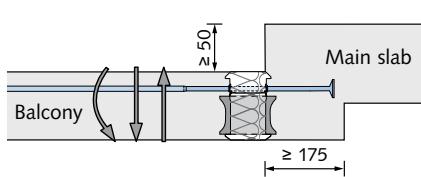

Dimensions in [mm]

7 HIT-HP MVX-OD – High Performance 80 mm insulation thickness

HIT-SP MVX-OD – Superior Performance 120 mm insulation thickness

Both types are also available as a multi-part design (-ES) for element slabs.

HIT-HP/SP MVX-OD as custom design
→ see page 52

Content	Typ	Page
Product types / Load range	HIT-HP/SP MVX-OD	43
Load bearing capacity values	HIT-HP/SP MVX-OD	48
Product description	HIT-HP/SP MVX-OD	52
On-site reinforcement	HIT-HP/SP MVX-OD	53
Installation diagram	HIT-HP/SP MVX-OD	55

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP MVX-OU, HIT-HP/SP MVX-OD

Product types – Load range


The respective load range results from the corresponding combination of TB- (tension bar) and CSB- (compression shear bearing) Box. The combinations of TB- and CSB-Box shown in the following table are possible.

Possible combinations of upper and lower element (TB- and CSB-Boxes)													
Element width B = 25 cm		Number of tension bars n _{TB}											
Number of compression shear bearings n _{CSB}	1	2	3	4	5	6	7	8	9	10	11	12	
Number of compression shear bearings n _{CSB}	1	●	●										
	2	●	●	●	●								
	3		●	●	●	●	●	●	●				
	4		●	●	●	●	●	●	●				
	5			●	●	●	●	●	●				
Number of compression shear bearings n _{CSBw}	1												
	2		●	●	●	●	●	●	●	●	●		
	3		●	●	●	●	●	●	●	●	●		
	4		●	●	●	●	●	●	●	●	●		
	5			●	●	●	●	●	●	●	●		
	6			●	●	●	●	●	●	●	●		
	7			●	●	●	●	●	●	●	●		
	8			●	●	●	●	●	●	●	●		
	9				●	●	●	●	●	●	●		
	10					●	●	●	●	●	●		
	11						●	●	●	●	●		
	12							●	●	●	●		

The load bearing capacity values for the selected elements can be found on pages 44 – 51 ● = HP and SP

Basic types – Ordering example

HIT-SP MVX - 07 05 - 20 - 100 - 35 - OU 175 - ES
 ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪



Type designation

- ① Product group
- ② Insulation thickness 80 mm (HP)
or 120 mm (SP)
- ③ Connection type
- ④ Number of tension rods
- ⑤ Number of CSB
- ⑥ Element height [cm]
- ⑦ Element width [cm]
- ⑧ Concrete cover (top) [mm]
- ⑨ Installation situation
(Downward height offset)
- ⑩ Thickness of building element bx [mm]
- ⑪ Only for main element slab

i bx for standard type:
175 mm < bx < 330 mm (HP)
175 mm < bx < 290 mm (SP)

Larger widths are available as custom solutions designs.
Our technical support team is available to assist you in realizing your projects.
Contact: → see back of catalogue



Possible slab thickness h

Concrete cover [mm]	30	35	50
Possible main slab height h [cm]	16 – 35	16 – 35	18 – 35

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

HIT-HP MVX-OU

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)

 Shear load capacity $\pm v_{Rd}$	Concrete strength: C20/25 ≥C25/30						 OU	 OU	 80
--	-----------------------------------	--	--	--	--	--	--	--	--

Type / Element width	B = 1.00 m	HP MVX-0403-...-OU	HP MVX-0504-...-OU	HP MVX-0604-...-OU	HP MVX-0302-...-OU	HP MVX-0805-...-OU	HP MVX-0906-...-OU
	B = 0.50 m	—	—	—	—	—	—
	B = 0.25 m	—	—	—	—	—	—
Design values	v_{Rd} [kN/m]	48.0	48.0	64.0	64.0	64.0	96.0

Type / Element width	B = 1.00 m			HP MVX-0403-...-OU	HP MVX-0504-...-OU	HP MVX-0604-...-OU	HP MVX-0302-...-OU	HP MVX-0805-...-OU	HP MVX-0906-...-OU				
	B = 0.50 m			—	—	—	—	—	—				
	B = 0.25 m			—	—	—	—	—	—				
Concrete cover [mm]	30	35	50										
		160		15.7	16.4	20.0	20.8	22.7	23.9	29.5	31.2	34.0	35.8
	160		180	16.7	17.4	21.2	22.1	24.2	25.3	31.5	33.2	36.2	38.0
		170		17.7	18.4	22.5	23.3	25.6	26.8	33.5	35.1	38.5	40.2
	170		190	18.7	19.4	23.7	24.5	27.1	28.3	35.4	37.1	40.7	42.4
		180		19.6	20.3	24.9	25.7	28.6	29.8	37.4	39.1	42.9	44.6
	180		200	20.6	21.3	26.2	27.0	30.1	31.2	39.4	41.0	45.1	46.9
		190		21.6	22.3	27.4	28.2	31.5	32.7	41.3	43.0	47.3	49.1
	190		210	22.6	23.3	28.6	29.4	33.0	34.2	43.3	45.0	49.5	51.3
		200		23.6	24.3	29.8	30.7	34.5	35.7	45.3	46.9	51.7	53.5
	200		220	24.6	25.3	31.1	31.9	36.0	37.1	47.2	48.9	53.9	55.7
		210		25.5	26.2	32.3	33.1	37.4	38.6	49.2	50.9	56.2	57.9
	210		230	26.5	27.2	33.5	34.4	38.9	40.1	51.2	52.8	58.4	60.1
		220		27.5	28.2	34.8	35.6	40.4	41.6	53.1	54.8	60.6	62.3
	220		240	28.5	29.2	36.0	36.8	41.9	43.0	55.1	56.8	62.8	64.6
		230		29.5	30.2	37.2	38.0	43.3	44.5	57.1	58.7	65.0	66.8
	230		250	30.5	31.2	38.5	39.3	44.8	46.0	59.0	60.7	67.2	69.0
		240		31.5	32.1	39.7	40.5	46.3	47.5	61.0	62.7	69.4	71.2
	240		260	32.4	33.1	40.9	41.7	47.8	48.9	63.0	64.6	71.6	73.4
		250		33.4	34.1	42.1	43.0	49.2	50.4	64.9	66.6	73.9	75.6
	250		270	34.4	35.1	43.4	44.2	50.7	51.9	66.9	68.6	76.0	77.8
		> 250		Load bearing capacity values for further elements (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.									

 On-site reinforcement $A_{s,req}$ (→ page 53)	Edge frame	Balcony side	Ø6 / 25 cm
---	------------	--------------	------------

 Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	5	6	7	9	10
Cross section A_{sw} [cm ² /m] for each leg	5.7	6.8	7.9	10.2	11.3

Minimum transverse reinforcement: At least one reinforcement bar Ø 12 mm must be placed next to the anchor head on the side nearest to the element edge.

 All necessary verifications have already been considered. Connecting elements must be verified by the planner.
--

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MVX-OU

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥C25/30



Type / Element width	B = 1.00 m	HP MVX-1006-...-OU	HP MVX-1008-...-OU	HP MVX-0610-...-OU	HP MVX-1010-...-OU	HP MVX-1012-...-OU
	B = 0.50 m	HP MVX-0503-...-OU	HP MVX-0504-...-OU	HP MVX-0305-...-OU	HP MVX-0505-...-OU	-
	B = 0.25 m	-	-	-	-	-
Design values	v_{Rd} [kN/m]	96.0	96.0	128.0	128.0	160.0
		160.0	160.0	160.0	160.0	192.0
		192.0	192.0			



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			HP MVX-1006-...-OU	HP MVX-1008-...-OU	HP MVX-0610-...-OU	HP MVX-1010-...-OU	HP MVX-1012-...-OU
	B = 0.50 m			HP MVX-0503-...-OU	HP MVX-0504-...-OU	HP MVX-0305-...-OU	HP MVX-0505-...-OU	-
	B = 0.25 m			-	-	-	-	-
Concrete cover [mm]	30	35	50					
		160		36.3	38.5	40.0	41.7	27.5
		160	180	38.8	41.0	42.5	44.1	29.0
		170		41.2	43.4	44.9	46.6	30.4
		170	190	43.7	45.9	47.4	49.0	31.9
		180		46.2	48.3	49.9	51.5	33.4
		180	200	48.6	50.8	52.3	54.0	34.9
		190		51.1	53.3	54.8	56.4	36.3
		190	210	53.5	55.7	57.2	58.9	37.8
		200		56.0	58.2	59.7	61.3	39.3
		200	220	58.5	60.6	62.2	63.8	40.8
		210		60.9	63.1	64.4	66.2	42.2
		210	230	63.4	65.5	66.5	68.7	43.7
		220		65.8	68.0	68.7	71.2	45.2
		220	240	68.3	70.5	70.8	73.6	46.7
		230		70.7	72.9	72.9	76.1	48.1
		230	250	73.2	75.4	75.1	78.5	49.6
		240		75.7	77.8	77.2	81.0	51.1
		240	260	78.1	80.3	79.4	83.5	52.6
		250		80.6	82.8	81.5	85.9	54.0
		250	270	83.0	85.2	83.7	88.4	55.5
Design values m_{Rd} [kNm/m] for slab thickness [mm]	> 250			Load bearing capacity values for further elements (e.g. for $h > 250$ mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.				



On-site reinforcement $A_{s,req}$ (→ page 53)

Edge frame	Balcony side	$\varnothing 6 / 25$ cm	$\varnothing 6 / 22.5$ cm	$\varnothing 6 / 25$ cm	$\varnothing 6 / 16.5$ cm



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	11	11	7	11	11
Cross section A_{sw} [cm ² /m] for each leg	12.4	12.4	7.9	12.4	12.4

Minimum transverse reinforcement: At least one reinforcement bar $\varnothing 12$ mm must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-SP MVX-OU

Load bearing capacity values $v_{Rd,2}$ / $m_{Rd,2}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥C25/30



Type / Element width	B = 1.00 m	SP MVX-0403-...-OU	SP MVX-0504-...-OU	SP MVX-0705-...-OU	SP MVX-0906-...-OU	SP MVX-1208-...-OU					
	B = 0.50 m	—	—	—	—	SP MVX-0604-...-OU					
	B = 0.25 m	—	—	—	—	SP MVX-0302-...-OU					
Design values	v_{Rd} [kN/m]	45.6	48.0	62.0	64.0	74.3	80.0	84.9	96.0	106.3	120.8



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-0403-...-OU	SP MVX-0504-...-OU	SP MVX-0705-...-OU	SP MVX-0906-...-OU	SP MVX-1208-...-OU					
	B = 0.50 m			—	—	—	—	SP MVX-0604-...-OU					
	B = 0.25 m			—	—	—	—	SP MVX-0302-...-OU					
Concrete cover [mm]	30	35	50										
		160		15.7	16.4	20.0	20.8	27.1	28.4	34.0	35.8	45.4	47.7
		160	180	16.7	17.4	21.2	22.1	28.8	30.1	36.2	38.0	48.3	50.7
		170		17.7	18.4	22.5	23.3	30.5	31.8	38.5	40.2	51.3	53.6
		170	190	18.7	19.4	23.7	24.5	32.2	33.5	40.7	42.4	54.2	56.6
		180		19.6	20.3	24.9	25.7	34.0	35.2	42.9	44.6	57.2	59.5
		180	200	20.6	21.3	26.2	27.0	35.7	37.0	45.1	46.9	60.1	62.5
		190		21.6	22.3	27.4	28.2	37.4	38.7	47.3	49.1	63.1	65.4
		190	210	22.6	23.3	28.6	29.4	39.1	40.4	49.5	51.3	66.0	68.4
		200		23.6	24.3	29.8	30.7	40.9	42.1	51.7	53.5	69.0	71.3
		200	220	24.6	25.3	31.1	31.9	42.6	43.9	53.9	55.7	71.9	74.3
		210		25.5	26.2	32.3	33.1	44.3	45.6	56.2	57.9	74.9	77.2
		210	230	26.5	27.2	33.5	34.4	46.0	47.3	58.4	60.1	77.8	80.2
		220		27.5	28.2	34.8	35.6	47.7	49.0	60.6	62.3	80.4	83.1
		220	240	28.5	29.2	36.0	36.8	49.5	50.7	62.8	64.6	83.0	86.1
		230		29.5	30.2	37.2	38.0	51.2	52.5	65.0	66.8	85.6	89.0
		230	250	30.5	31.2	38.5	39.3	52.9	54.2	67.2	69.0	88.2	92.0
		240		31.5	32.1	39.7	40.5	54.6	55.9	69.4	71.2	90.7	94.9
		240	260	32.4	33.1	40.9	41.7	56.3	57.6	71.6	73.4	93.3	97.9
		250		33.4	34.1	42.1	43.0	58.1	59.3	73.9	75.6	95.9	100.8
		250	270	34.4	35.1	43.4	44.2	59.8	61.1	76.0	77.8	98.4	103.8
		> 250		Load bearing capacity values for further elements (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.									



On-site reinforcement $A_{s,req}$ (→ page 53)

Edge frame	Balcony side	$\varnothing 6 / 25 \text{ cm}$	$\varnothing 6 / 21 \text{ cm}$
------------	--------------	---------------------------------	---------------------------------



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	5	6	8	10	13
Cross section A_{sw} [cm ² /m] for each leg	5.7	6.8	9.0	11.3	14.7

Minimum transverse reinforcement: At least one reinforcement bar $\varnothing 12 \text{ mm}$ must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP MVX-OU

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥C25/30



Type / Element width	B = 1.00 m	SP MVX-0202-...-OU	SP MVX-0406-...-OU	SP MVX-1006-...-OU	SP MVX-1008-...-OU	SP MVX-1012-...-OU					
	B = 0.50 m	SP MVX-0101-...-OU	SP MVX-0203-...-OU	SP MVX-0503-...-OU	SP MVX-0504-...-OU	—					
	B = 0.25 m	—	—	—	—	—					
Design values	v_{Rd} [kN/m]	30.7	32.0	77.2	81.7	93.7	96.0	124.9	128.0	159.4	166.8



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-0202-...-OU	SP MVX-0406-...-OU	SP MVX-1006-...-OU	SP MVX-1008-...-OU	SP MVX-1012-...-OU				
	B = 0.50 m			SP MVX-0101-...-OU	SP MVX-0203-...-OU	SP MVX-0503-...-OU	SP MVX-0504-...-OU	—				
	B = 0.25 m			—	—	—	—	—				
Concrete cover [mm]	30	35	50									
	160		8.5	8.7	18.1	18.4	28.6	38.5	38.2	41.7	36.3	37.9
	160	180	8.9	9.2	19.1	19.4	30.4	41.0	40.5	44.1	38.3	40.0
	170		9.4	9.7	20.1	20.4	32.1	43.4	42.8	46.6	40.3	42.0
	170	190	9.9	10.2	21.0	21.4	33.8	45.9	45.1	49.0	42.3	44.0
	180		10.4	10.7	22.0	22.4	35.5	48.3	47.4	51.5	44.2	46.0
	180	200	10.9	11.2	23.0	23.4	37.3	50.8	49.8	54.0	46.2	48.1
	190		11.4	11.7	24.0	24.3	39.0	53.3	52.1	56.4	48.2	50.1
	190	210	11.9	12.2	25.0	25.3	40.7	55.7	54.4	58.9	50.2	52.1
	200		12.4	12.6	26.0	26.3	42.5	58.2	56.7	61.3	52.1	54.2
	200	220	12.9	13.1	26.9	27.3	44.2	60.6	59.0	63.8	54.1	56.2
	210		13.4	13.6	27.9	28.3	45.9	63.1	61.3	66.2	56.1	58.2
	210	230	13.9	14.1	28.9	29.3	47.6	65.5	63.6	68.7	58.1	60.3
	220		14.4	14.6	29.9	30.2	49.4	68.0	65.9	71.2	60.1	62.3
	220	240	14.8	15.1	30.9	31.2	51.1	70.5	68.2	73.6	62.0	64.3
	230		15.3	15.6	31.9	32.2	52.8	72.9	70.5	76.1	64.0	66.3
	230	250	15.8	16.1	32.8	33.2	54.6	75.4	72.8	78.5	66.0	68.4
	240		16.3	16.6	33.8	34.2	56.3	77.8	75.1	81.0	68.0	70.4
	240	260	16.8	17.1	34.8	35.2	58.0	80.3	77.4	83.5	69.9	72.4
	250		17.3	17.6	35.8	36.1	59.7	82.8	79.8	85.9	71.9	74.5
	250	270	17.8	18.1	36.8	37.1	61.5	85.2	82.1	88.4	73.9	76.5
	> 250		Load bearing capacity values for further elements (e.g. for $h > 250$ mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.									



On-site reinforcement $A_{s,req}$ (→ page 53)

Edge frame Balcony side $\varnothing 6 / 25$ cm $\varnothing 6 / 22.5$ cm $\varnothing 6 / 18.5$ cm



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	3	5	11	11	11
Cross section A_{sw} [cm ² /m] for each leg	3.4	5.7	12.4	12.4	12.4

Minimum transverse reinforcement: At least one reinforcement bar $\varnothing 12$ mm must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

Building Physics,
Planning



HIT-HP MVX-OD

Load bearing capacity values $v_{Rd,2}$ / $m_{Rd,2}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0403-...-OD	HP MVX-0504-...-OD	HP MVX-0706-...-OD	HP MVX-0806-...-OD	HP MVX-1007-...-OD
	B = 0.50 m	—	—	—	HP MVX-0403-...-OD	—
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	31.1	35.7	45.6	51.8	74.6
					83.8	62.3
					71.5	64.5
					75.2	



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0403-...-OD	HP MVX-0504-...-OD	HP MVX-0706-...-OD	HP MVX-0806-...-OD	HP MVX-1007-...-OD
	B = 0.50 m	—	—	—	HP MVX-0403-...-OD	—
	B = 0.25 m	—	—	—	—	—
Concrete cover [mm]	30	35	50			

Design values m_{Rd} [kNm/m] for slab thickness [mm]	160	160	15.7	16.4	20.0	20.8	28.5	29.6	31.4	32.8	38.4	40.3
	160	180	16.7	17.4	21.2	22.1	30.3	31.3	33.4	34.8	40.9	42.8
	170	170	17.7	18.4	22.5	23.3	32.0	33.0	35.4	36.8	43.4	45.2
	170	190	18.7	19.4	23.7	24.5	33.7	34.8	37.3	38.7	45.8	47.7
	180	180	19.6	20.3	24.9	25.7	35.4	36.5	39.3	40.7	48.3	50.1
	180	200	20.6	21.3	26.2	27.0	37.1	38.2	41.3	42.7	50.7	52.6
	190	190	21.6	22.3	27.4	28.2	38.9	39.9	43.2	44.6	53.2	55.1
	190	210	22.6	23.3	28.6	29.4	40.6	41.7	45.2	46.6	55.7	57.5
	200	200	23.6	24.3	29.8	30.7	42.3	43.4	47.2	48.6	58.1	60.0
	200	220	24.6	25.3	31.1	31.9	44.0	45.1	49.1	50.5	60.6	62.4
	210	210	25.5	26.2	32.3	33.1	45.7	46.8	51.1	52.5	63.0	64.9
	210	230	26.5	27.2	33.5	34.4	47.5	48.5	53.1	54.5	65.5	67.3
	220	220	27.5	28.2	34.8	35.6	49.2	50.3	55.0	56.4	67.9	69.8
	220	240	28.5	29.2	36.0	36.8	50.9	52.0	57.0	58.4	70.4	72.3
	230	230	29.5	30.2	37.2	38.0	52.6	53.7	59.0	60.4	72.9	74.7
	230	250	30.5	31.2	38.5	39.3	54.4	55.4	60.9	62.3	75.1	77.2
	240	240	31.5	32.1	39.7	40.5	56.1	57.1	62.9	64.3	77.2	79.6
	240	260	32.4	33.1	40.9	41.7	57.8	58.9	64.9	66.3	79.4	82.1
	250	250	33.4	34.1	42.1	43.0	59.5	60.6	66.8	68.2	81.5	84.6
	250	270	34.4	35.1	43.4	44.2	61.2	62.3	68.8	70.2	83.7	87.0
> 250		Load bearing capacity values for further elements (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.										



On-site rehexment $A_{s,req}$ (→ page 54)

Edge frame	Balcony side	Ø6 / 25 cm	Ø6 / 24,5 cm
------------	--------------	------------	--------------



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	5	6	8	9	11
Cross section A_{sw} [cm ² /m] for each leg	5.7	6.8	9.0	10.2	12.4

Minimum transverse reinforcement: At least one reinforcement bar Ø 12 mm must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE



HIT-HP MVX-OD

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	HP MVX-0202-...-OD	HP MVX-0505-...-OD	HP MVX-0606-...-OD	HP MVX-0608-...-OD	HP MVX-0610-...-OD
	B = 0.50 m	HP MVX-0101-...-OD	—	HP MVX-0303-...-OD	HP MVX-0304-...-OD	HP MVX-0305-...-OD
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	32.0	32.0	80.0	80.0	96.0
					96.0	128.0
					128.0	137.0
						147.1



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	HP MVX-0202-...-OD	HP MVX-0505-...-OD	HP MVX-0606-...-OD	HP MVX-0608-...-OD	HP MVX-0610-...-OD
	B = 0.50 m	HP MVX-0101-...-OD	—	HP MVX-0303-...-OD	HP MVX-0304-...-OD	HP MVX-0305-...-OD
	B = 0.25 m	—	—	—	—	—
Concrete cover [mm]	30	35	50			
		160	7.6	8.7	19.0	21.8
		160	8.0	9.2	20.1	23.0
		170	8.5	9.7	21.1	24.2
		170	8.9	10.2	22.2	25.5
		180	9.3	10.7	23.3	26.7
		180	9.8	11.2	24.4	27.9
		190	10.2	11.7	25.5	29.2
		190	10.6	12.2	26.5	30.4
		200	11.0	12.6	27.6	31.6
		200	11.5	13.1	28.7	32.8
		210	11.9	13.6	29.8	34.1
		210	12.3	14.1	30.8	35.3
		220	12.8	14.6	31.9	36.5
		220	13.2	15.1	33.0	37.8
		230	13.6	15.6	34.1	39.0
		230	14.1	16.1	35.1	40.2
		240	14.5	16.6	36.2	41.4
		240	14.9	17.1	37.3	42.7
		250	15.4	17.6	38.4	43.9
		250	15.8	18.1	39.5	45.1
Design values m_{Rd} [kNm/m] for slab thickness [mm]	> 250	Load bearing capacity values for further elements (e.g. for $h > 250$ mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.				



On-site reinforcement $A_{s,req}$ (→ page 54)

Edge frame

Balcony side

Ø6 / 25 cm



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	3	6	7	7	7
Cross section A_{sw} [cm ² /m] for each leg	3.4	6.8	7.9	7.9	7.9

Minimum transverse reinforcement: At least one reinforcement bar Ø 12 mm must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

Building Physics,
Planning



HIT-SP MVX-OD

Load bearing capacity values $v_{Rd,2}$ / $m_{Rd,2}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	SP MVX-0403-...-OD	SP MVX-0404-...-OD	SP MVX-0504-...-OD	SP MVX-0705-...-OD	SP MVX-0907-...-OD
	B = 0.50 m	—	SP MVX-0202-...-OD	—	—	—
	B = 0.25 m	—	SP MVX-0101-...-OD	—	—	—
Design values	v_{Rd} [kN/m]	23.8	28.0	48.2	53.8	35.9
		41.5	42.6	35.6	59.7	69.5



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m	SP MVX-0403-...-OD	SP MVX-0404-...-OD	SP MVX-0504-...-OD	SP MVX-0705-...-OD	SP MVX-0907-...-OD
	B = 0.50 m	—	SP MVX-0202-...-OD	—	—	—
	B = 0.25 m	—	SP MVX-0101-...-OD	—	—	—
Concrete cover [mm]	30	35	50			

Design values m_{Rd} [kNm/m] for slab thickness [mm]	160	160	15.7	16.4	16.9	17.4	20.0	20.8	27.1	28.4	35.7	37.2
	160	180	16.7	17.4	17.9	18.4	21.2	22.1	28.8	30.1	38.0	39.5
	170	170	17.7	18.4	18.9	19.4	22.5	23.3	30.5	31.8	40.2	41.7
	170	190	18.7	19.4	19.9	20.4	23.7	24.5	32.2	33.5	42.4	43.9
	180	180	19.6	20.3	20.8	21.4	24.9	25.7	34.0	35.2	44.6	46.1
	180	200	20.6	21.3	21.8	22.3	26.2	27.0	35.7	37.0	46.8	48.3
	190	190	21.6	22.3	22.8	23.3	27.4	28.2	37.4	38.7	49.0	50.5
	190	210	22.6	23.3	23.8	24.3	28.6	29.4	39.1	40.4	51.2	52.7
	200	200	23.6	24.3	24.8	25.3	29.8	30.7	40.9	42.1	53.4	55.0
	200	220	24.6	25.3	25.8	26.3	31.1	31.9	42.6	43.9	55.7	57.2
	210	210	25.5	26.2	26.7	27.3	32.3	33.1	44.3	45.6	57.9	59.4
	210	230	26.5	27.2	27.7	28.2	33.5	34.4	46.0	47.3	60.1	61.6
	220	220	27.5	28.2	28.7	29.2	34.8	35.6	47.7	49.0	62.3	63.8
	220	240	28.5	29.2	29.7	30.2	36.0	36.8	49.5	50.7	64.4	66.0
	230	230	29.5	30.2	30.7	31.2	37.2	38.0	51.2	52.5	66.4	68.2
	230	250	30.5	31.2	31.7	32.2	38.5	39.3	52.9	54.2	68.3	70.4
	240	240	31.5	32.1	32.6	33.2	39.7	40.5	54.6	55.9	70.2	72.7
	240	260	32.4	33.1	33.6	34.1	40.9	41.7	56.3	57.6	72.2	74.9
	250	250	33.4	34.1	34.6	35.1	42.1	43.0	58.1	59.3	74.1	77.1
	250	270	34.4	35.1	35.6	36.1	43.4	44.2	59.8	61.1	76.0	79.3
> 250		Load bearing capacity values for further elements (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.										



On-site reinforcement $A_{s,req}$ (→ page 54)

Edge frame	Balcony side	Ø6 / 25 cm



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	5	5	6	8	10
Cross section A_{sw} [cm ² /m] for each leg	5.7	5.7	6.8	9.0	11.3

Minimum transverse reinforcement: At least one reinforcement bar Ø 12 mm must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE



HIT-SP MVX-OD

Load bearing capacity values $v_{Rd,1}$ / $m_{Rd,1}$ according to EN 1992-1-1 (EC2)



Shear load capacity $\pm v_{Rd}$

Concrete strength: C20/25 ≥ C25/30



Type / Element width	B = 1.00 m	SP MVX-0202-...-OD	SP MVX-0505-...-OD	SP MVX-0606-...-OD	SP MVX-0608-...-OD	SP MVX-0610-...-OD
	B = 0.50 m	SP MVX-0101-...-OD	—	SP MVX-0303-...-OD	SP MVX-0304-...-OD	SP MVX-0305-...-OD
	B = 0.25 m	—	—	—	—	—
Design values	v_{Rd} [kN/m]	28.6	31.1	71.5	77.8	85.8
		93.3	107.3	115.8	111.5	119.6



Moment bearing capacity m_{Rd}

Type / Element width	B = 1.00 m			SP MVX-0202-...-OD	SP MVX-0505-...-OD	SP MVX-0606-...-OD	SP MVX-0608-...-OD	SP MVX-0610-...-OD	
	B = 0.50 m			SP MVX-0101-...-OD	—	SP MVX-0303-...-OD	SP MVX-0304-...-OD	SP MVX-0305-...-OD	
	B = 0.25 m			—	—	—	—	—	
Concrete cover [mm]	30	35	50						
			160	7.2	7.4	17.9	18.6	21.5	
			160	7.6	7.8	18.9	19.6	22.7	
			170	8.0	8.2	19.9	20.6	23.9	
			170	8.4	8.6	20.9	21.6	25.1	
			180	8.8	9.1	21.9	22.6	26.3	
			180	9.2	9.5	22.9	23.7	27.5	
			190	9.6	9.9	23.9	24.7	28.7	
			190	10.0	10.3	24.9	25.7	29.9	
			200	10.4	10.7	25.9	26.7	31.1	
			200	10.8	11.1	26.9	27.7	32.3	
			210	11.2	11.5	27.9	28.7	33.5	
			210	11.6	11.9	28.9	29.8	34.7	
			220	12.0	12.3	29.9	30.8	35.9	
			220	12.4	12.7	30.9	31.8	37.1	
			230	12.8	13.1	31.9	32.8	38.3	
			230	13.2	13.5	32.9	33.8	39.5	
			240	13.6	13.9	33.9	34.9	40.7	
			240	14.0	14.3	34.9	35.9	41.6	
			250	14.4	14.8	35.9	36.9	43.1	
			250	14.8	15.2	36.9	37.9	44.3	
			> 250	Load bearing capacity values for further elements (e.g. for h > 250 mm, C30/37, $v_{Rd,2}$ and $m_{Rd,2}$) are available in the type tests, at www.halfen.com and on request from our technical support team. See back of catalogue for contact information.					



On-site reinforcement $A_{s,req}$ (→ page 54)

Edge frame	Balcony side	$\varnothing 6 / 25 \text{ cm}$	$\varnothing 6 / 20 \text{ cm}$



Minimum on-site stirrup reinforcement on main slab side (Stirrups are considered as single lap jointed)

Number of stirrups per metre	3	6	7	7	7
Cross section A_{sw} [cm ² /m] for each leg	3.4	6.8	7.9	7.9	7.9

Minimum transverse reinforcement: At least one reinforcement bar $\varnothing 12 \text{ mm}$ must be placed next to the anchor head on the side nearest to the element edge.



All necessary verifications have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP MVX-OU, HIT-HP/SP MVX-OD

Product description – Cross sections

HIT-HP MVX-OU;
with bent anchor head


HIT-HP MVX-OD;
with straight anchor head
(dotted line)

 Also available as multi part type
for main slab element.

HIT-SP MVX-OU ES;
with bent anchor head

HIT-SP MVX-OD ES;
with straight anchor head
(dotted line)

- ① Tension section 1: Ø12 mm
- ② Tension section 2: Ø10.5 mm stainless steel
- ③ Double-symmetrical CSB
- ④ Tension bar box
- ⑤ Distance box as height offset h = from 20 mm
(→ see page 30)
- ⑥ Compression shear bearing box
- ⑦ Tension bar with straight anchor head

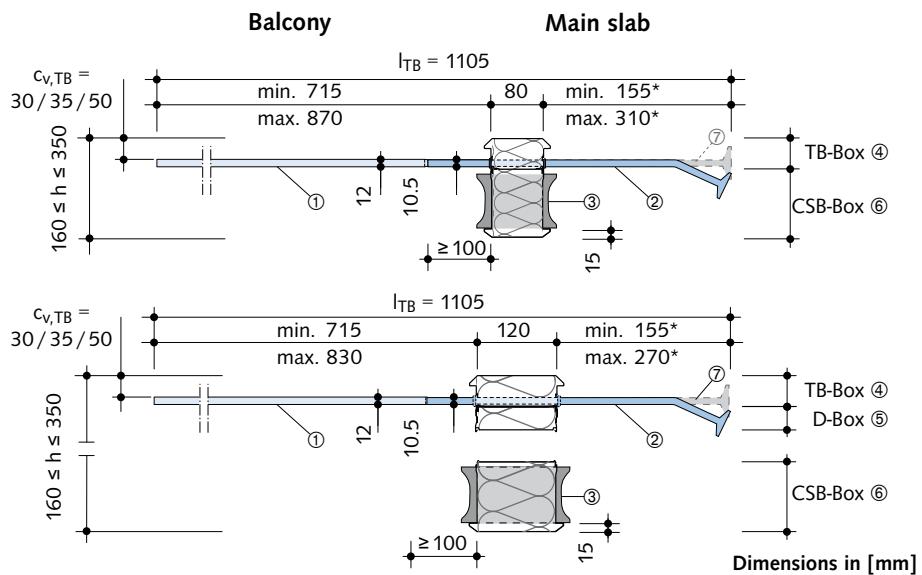

*The total length of the tension bar is pre-determined. The proportional section length for the main slab side depends on the present geometry:

Building element thickness $bx - 20 \text{ mm} \leq 310 \text{ mm}$ (HIT-HP)

$\leq 270 \text{ mm}$ (HIT-SP)

Further special lengths are available on request, See contact details at the back of the catalogue.

Example: For an element thickness of $bx = 175 \text{ mm}$ the tension bar length on the main slab side is 155 mm. This leaves a length of 870 mm for HIT-HP and 830 mm with HIT-SP Elements for the balcony side.



Balcony side anchor head as custom solutions

An anchor head application in a height offset balcony side is possible if the geometric requirements are observed.
(offset height $x \geq 50 \text{ mm}$, $bx \geq 175 \text{ mm}$)
A beam reinforcement is required and the location of the shear reinforcement (min. Ø12 mm, in close contact with the anchor heads) must be observed when designing the on-site connection reinforcement (balcony side).

HIT Custom solutions

Our technical support team is available to provide support in your project with custom solutions using HALFEN HIT Insulated connections

Contact: → see inside back cover

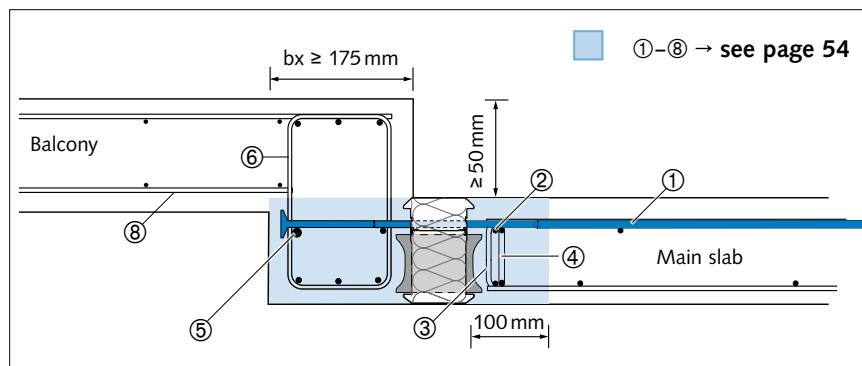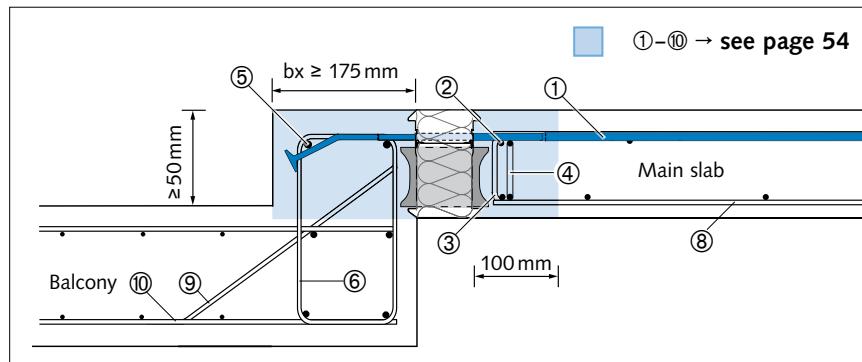


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP MVX-OU

On-site reinforcement

Upward height offset

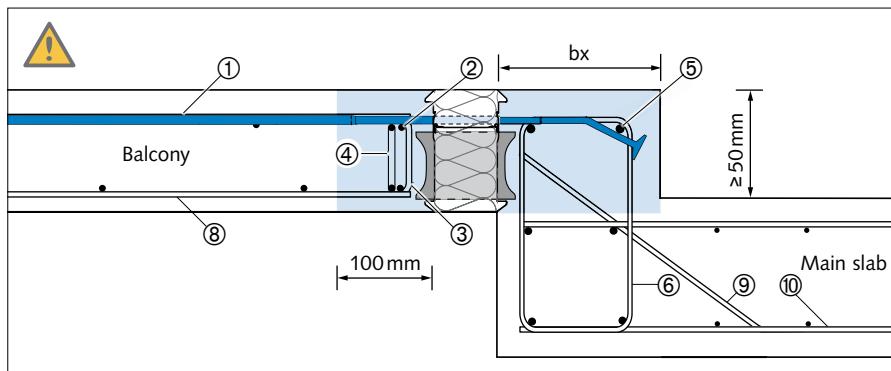

No construction joints


permissible in this area:
Balcony side → vertical
Main slab → vertical and horizontal

bx = building element thickness



Design as frame corner!
Recommended:
 $bx \geq$ height HIT Element

Wall connection, balcony slab higher

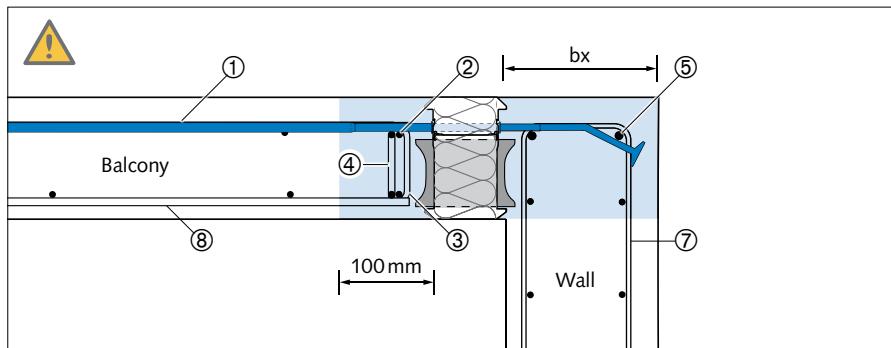

No construction joints



permissible in this area:
Balcony side → vertical
Wall side → vertical and horizontal

bx = building element thickness



Design as frame corner!
Recommended:
 $bx \geq$ height HIT Element

On-site reinforcement HIT-...-OU (example)

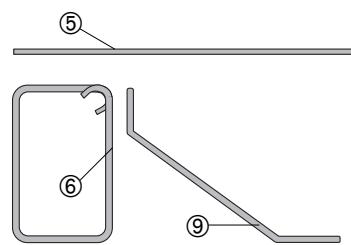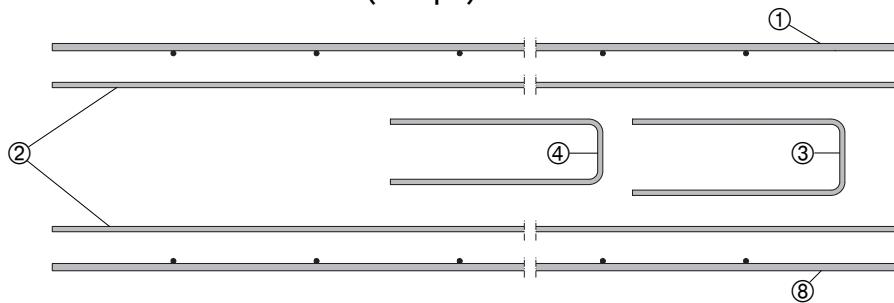

Structural design of on-site reinforcement for the HIT-HP/SP MVX-OU

- ① Upper connecting reinforcement made of bar steel or mesh, for reinforcement on balcony side; for more detail see also page 44
- ② Horizontal transverse tensile reinforcement $A_{s,h}$ min. $2 \times \varnothing 8$, parallel to the joint
- ③ Vertical tensile splitting reinforcement $A_{s,v}$ min. $\varnothing 6 / 25$, → see also page 44–47
- ④ Stirrups at slab edge as end anchorage for the transverse tensile reinforcement ③
- ⑤ Transverse reinforcement, min. $\varnothing 12$; in contact with the anchor bolts
- ⑥ Required minimum reinforcement for transmitting the loads from the HIT Element → see also pages 44–47
- ⑦ Required minimum reinforcement as loop or mesh reinforcement with statically required edge enclosure for transmitting the loads from the HIT Element → see also pages 44–47.

Specified by the structural engineer:

- ⑧ Connecting reinforcement of steel-bar or mesh
- ⑨ Diagonal structural reinforcement
- ⑩ Main slab reinforcement designed as stirrups or mesh reinforcement with statically required edge reinforcement for the main slab




Further reinforcement required due to additional load factors (e.g. beam shear reinforcement or bending reinforcement) must be verified by the structural engineer!

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP MVX-OD

On-site reinforcement

Downward height offset

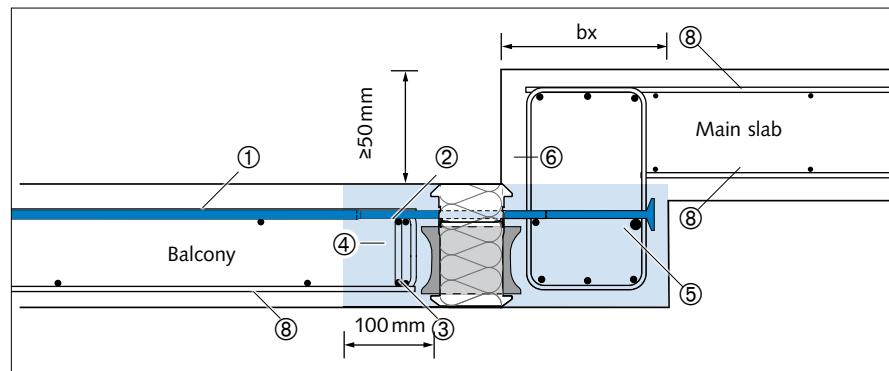


No construction joints permissible in this area:
 Balcony side → vertical
 Main slab side → vertical and horizontal
 bx = building element thickness



Design as frame corner!
 Recommended:
 $bx \geq$ HIT Element height

Downward wall connection


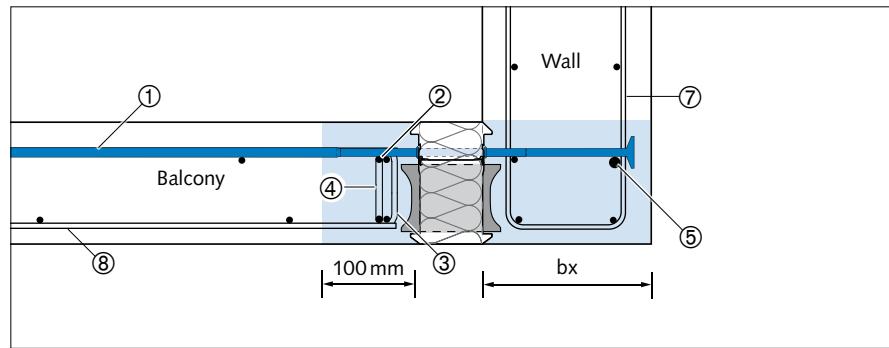


No construction joints permissible in this area:
 Balcony side → vertical
 Wall side → vertical and horizontal
 bx = building element thickness



HIT Element Height!
 Recommended:
 $bx \geq$ HIT Element height

On-site reinforcement HIT-...-OD (example)

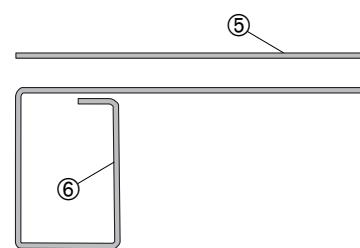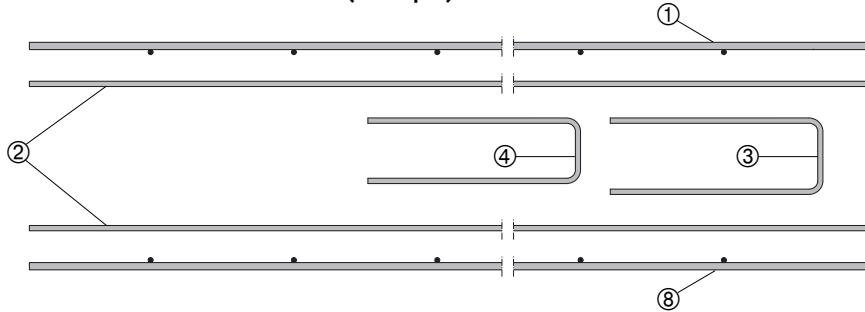

Structural design of on-site reinforcement for HIT-HP/SP MVX-OD

- ① Upper connecting reinforcement, bar steel or mesh, for reinforcement on the balcony side see also page 44
- ② Horizontal transverse tensile reinforcement $A_{s,h}$ min. $2 \times \varnothing 8$, parallel to the joint
- ③ Vertical tensile splitting reinforcement $A_{s,v}$ min. $\varnothing 6 / 25$, → see also pages 48–51
- ④ Stirrups at slab edge as end anchorage as transverse tensile reinforcement ③
- ⑤ Shear reinforcement, min. $\varnothing 12$; with close contact to the anchor heads
- ⑥ Required minimum reinforcement for transmitting the loads from the HIT Element → see also pages 48–51
- ⑦ Required minimum reinforcement as stirrup or mesh reinforcement with statically required edge reinforcement for transmitting the loads from the HIT Element → see also pages 48–51

Specified by the structural engineer:

- ⑧ Connecting reinforcement in steel-bar or mesh



Further reinforcement required due to additional load factors (e.g. beam shear reinforcement or bending reinforcement) must be specified by the structural engineer!

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP MVX-OU, HIT-HP/SP MVX-OD

1

MVX-/COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6


AT / FT / OTX / FK

7

8

Building Physics,
Planning

Installation diagram

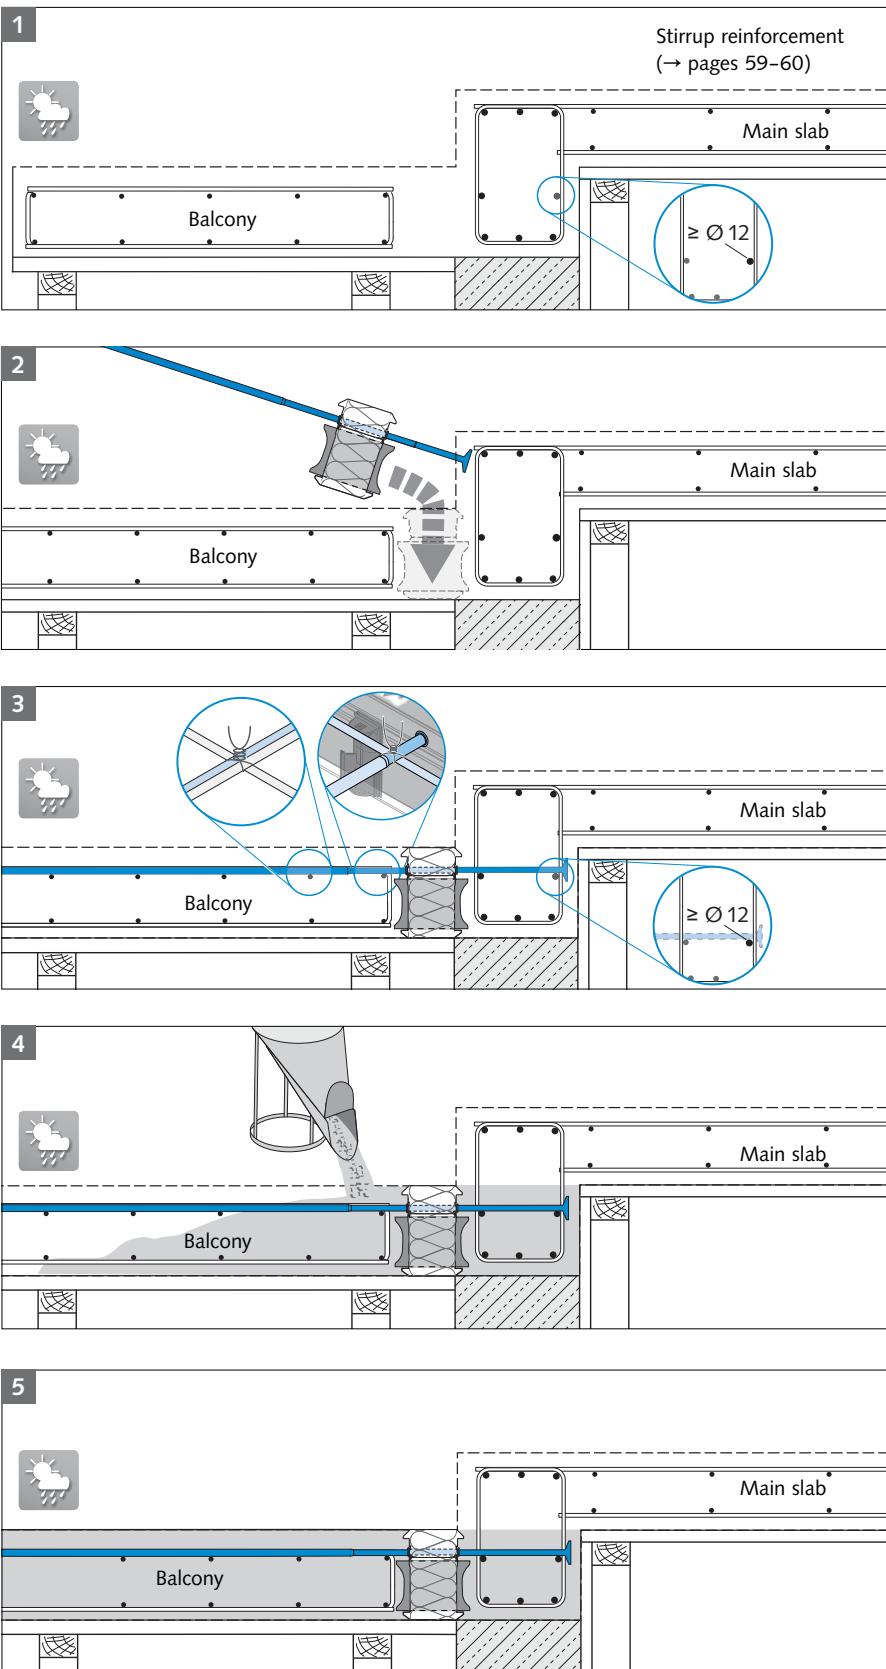

1 Installation of on-site reinforcement

See details on pages 53–54.

! Ensure that the formwork is at the correct height!


! The on-site reinforcement must be placed as specified by the structural engineer.

2 Installation of the HIT Elements from above

Check that the red arrows on the HIT Element and the CSB are pointing towards the balcony. Ensure that the anchor bolts are placed behind the vertical structural reinforcement (e.g. stirrup). Minimum concrete cover of the anchor bolts has to be 20 mm.

3 Fixing of HIT Tension bars to on-site reinforcement using tying wire

Transverse reinforcement
(\rightarrow see also pages 53–54): min. $\text{Ø} 12$ mm, must to be placed with close contact to the anchor bolts.

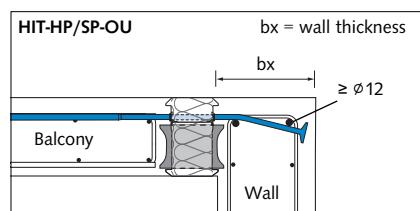

4 Pouring the concrete

Observe required expansion joints
 \rightarrow see illustrations on pages 53–54

! To ensure the HIT Elements are not displaced, pour and compact the concrete evenly.

5 Freshly concreted balcony slab on supporting structure

! For element slab design please observe the notes on page 30

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

4

5

6

AT / FT / OTX / FK

7

ST / WT

Building Physics,
Planning




3

- For simply supported balcony slabs on columns

- Transfers shear forces only



type-tested

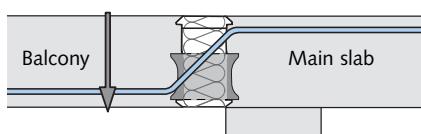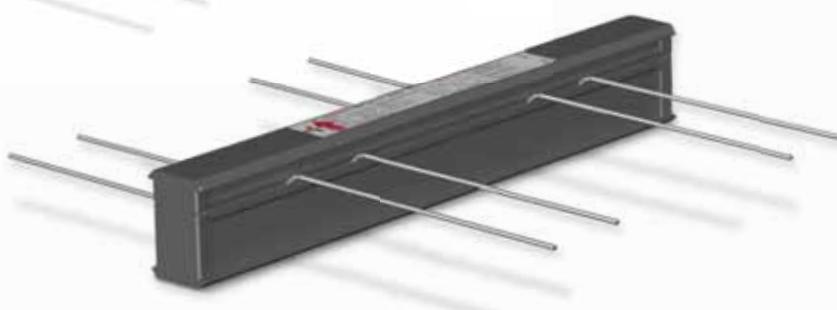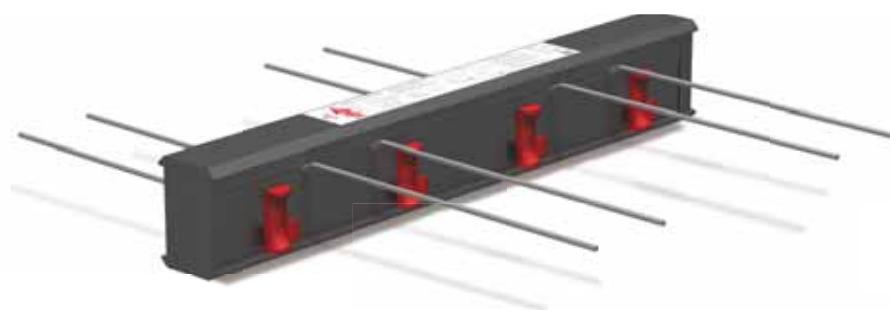


HIT-HP ZVX – High Performance

80 mm insulation thickness

HIT-SP ZVX – Superior Performance

120 mm insulation thickness

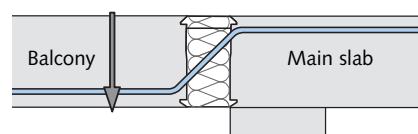

HIT-HP ZVX – High Performance


80 mm insulation thickness;

without CSB

HIT-SP ZVX – Superior Performance

120 mm insulation thickness;

without CSB

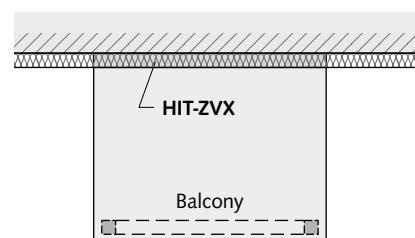

Application: Simply supported balcony
on columns

Content

Type



Page

Product types / Load range	HIT-HP ZVX, HIT-SP ZVX	58
Product description	HIT-HP ZVX, HIT-SP ZVX	59
Load bearing capacity values	HIT-HP ZVX, HIT-SP ZVX	60
Maximum load capacities	HIT-HP ZVX, HIT-SP ZVX	69
Application examples and joint spacings	HIT-HP ZVX, HIT-SP ZVX	71
On-site reinforcement	HIT-HP ZVX, HIT-SP ZVX	73
Installation diagram	HIT-HP ZVX, HIT-SP ZVX	74

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP ZDX, HIT-SP ZDX

- For simply-supported balcony slabs on columns
- Transfers positive and negative shear forces

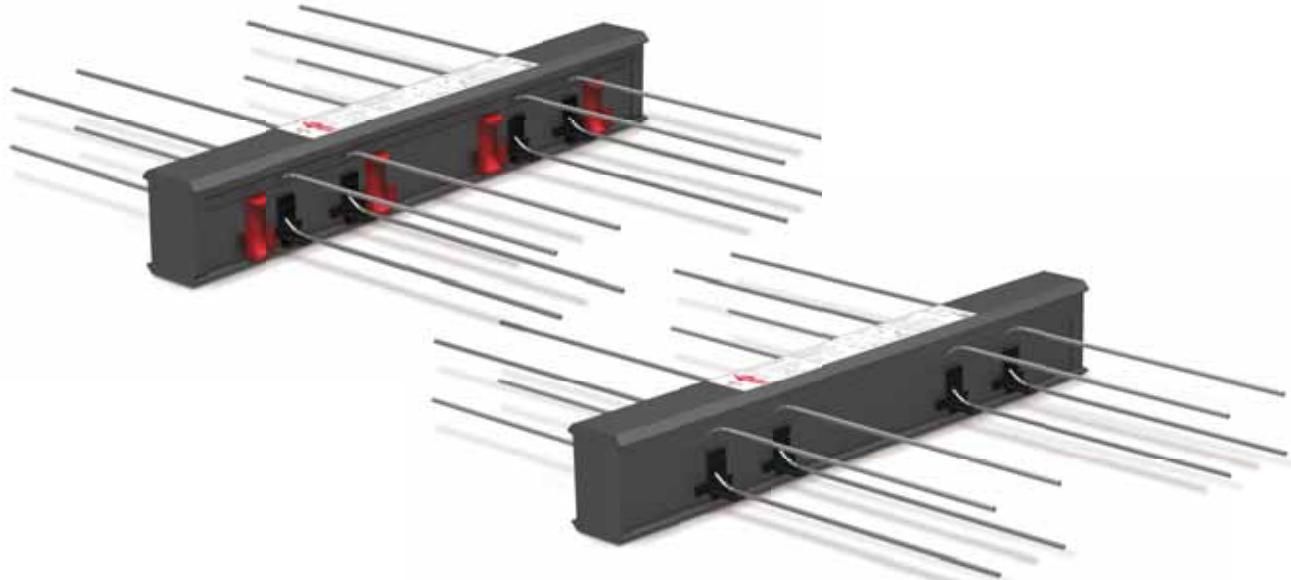


HIT-HP ZDX – High Performance
80 mm insulation thickness

HIT-SP ZDX – Superior Performance
120 mm insulation thickness



HIT-HP ZDX – High Performance
80 mm insulation thickness;
without CSB

HIT-SP ZDX – Superior Performance
120 mm insulation thickness;
without CSB

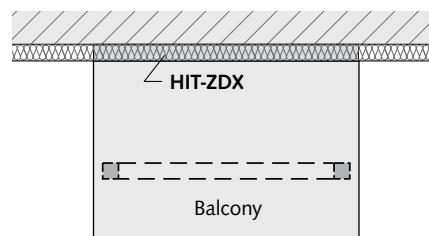

Application: Simply supported balcony
on columns

Content	Type	Page
Product types / Load range	HIT-HP ZDX, HIT-SP ZDX	58
Product description	HIT-HP ZDX, HIT-SP ZDX	59
Load bearing capacity values	HIT-HP ZDX, HIT-SP ZDX	60
Maximum load capacities	HIT-HP ZDX, HIT-SP ZDX	69
Application examples and joint spacings	HIT-HP ZDX, HIT-SP ZDX	71
On-site reinforcement	HIT-HP ZDX, HIT-SP ZDX	73
Installation diagram	HIT-HP ZDX, HIT-SP ZDX	74

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR

2 MVX-OU/OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT

8 Building Physics,
Planning

HIT-HP ZVX, HIT-SP ZVX / HIT-HP ZDX, HIT-SP ZDX

Product types – Load range

The load range selection table illustrates the possible combinations of support elements (shear load bars and double-symmetrical CSB) depending on the element width. For HIT-ZDX Elements the number of shear load bars is given for each load direction (in the following identified as "side").

Possible combinations of SB (shear load bars) and CSB (Compression Shear Bearings)

Diameter of the shear load bars [mm]	Ø 6			Ø 8			Ø 10			Ø 12		
Element width B = 25 cm	Number of shear load bars n _{SB}											
	1	2	3	1	2	3	2	3	4	5	2	3
Number of compression shear bearings n _{CSB}	0	●	●	●	●	●	●	●	●	●	●	●
	1	●	●	●	●	●	●	●	●	●	●	●
Element width B = 33 cm	Number of shear load bars n _{SB}											
	2	3	4	5	2	3	4	5	2	3	4	5
Number of compression shear bearings n _{CSB}	0	●	●	●	●	●	●	●	●	●	●	●
	2	●	●	●	●	●	●	●	●	●	●	●
Element width B = 50 cm	Number of shear load bars n _{SB}											
	1	2	3	4	5	6	1	2	3	4	5	6
Number of compression shear bearings n _{CSB}	0	●	●	●	●	●	●	●	●	●	●	●
	1	●	●	●	●	●	●	●	●	●	●	●
Number of compression shear bearings n _{CSB}	2	●	●	●	●	●	●	●	●	●	●	●
	3	●	●	●	●	●	●	●	●	●	●	●
Element width B = 100 cm	Number of shear load bars n _{SB}											
	2	3	4	5	6	7	8	9-12	2	3	4	5
Number of compression shear bearings n _{CSB}	0	●	●	●	●	●	●	●	●	●	●	●
	2	●	●	●	●	●	●	●	●	●	●	●
Number of compression shear bearings n _{CSB}	3	●	●	●	●	●	●	●	●	●	●	●
	4	●	●	●	●	●	●	●	●	●	●	●
Number of compression shear bearings n _{CSB}	6	●	●	●	●	●	●	●	●	●	●	●

Load bearing capacity values for selected elements can be found on pages 60–65.

● = HP and SP

 The complete type-tested load class range for concrete grades C20/25 and ≥C25/30 can be downloaded from www.halfen.com.

Basic types – Ordering example

HIT-HP ZVX - 08 04 - 18 - 100 - 30 - 08



Type description

- ① Product group
- ② Insulation thickness 80 mm (HP) i.e. 120 mm (SP)
- ③ Connection type
- ④ ZVX: No. of shear load bars
ZDX: No. of shear load bars on each side
- ⑤ Number of CSB
- ⑥ Element height [cm]
- ⑦ Element width [cm]
- ⑧ Concrete cover unten [mm]
- ⑨ Diameter shear load bars [mm]

HIT Custom solutions

Our technical support team is available to provide support in your project with custom solutions using HALFEN HIT Insulated connections

Contact: → see inside back cover

Possible main slab height h

Concrete cover [mm]	lower: 30 upper: ≥ 30			
Diameter of the shear load bars [mm]	06	08	10	12
Possible main slab height h [cm]	16–35	16–35	17–35	18–35

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP ZVX, HIT-SP ZVX / HIT-HP ZDX, HIT-SP ZDX

Product description – Cross sections (Typical applications)

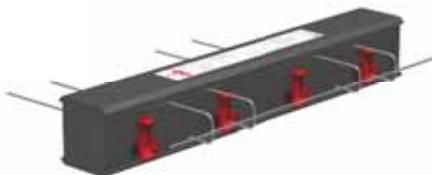


Figure: Type HIT-SP ZVX-0404---06
Bent bar type; shear load bars $\varnothing 6$ mm
(also available for custom designs $\varnothing 8$ mm)




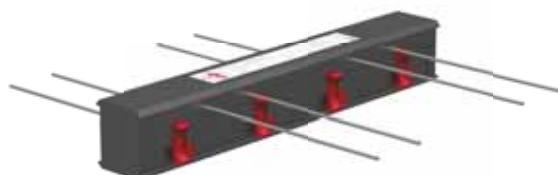


Figure: Type HIT-SP ZVX-0404---08
Straight bar type; shear load bars $\varnothing 8, \varnothing 10, \varnothing 12$ mm
(also available for custom designs in $\varnothing 6$ mm)

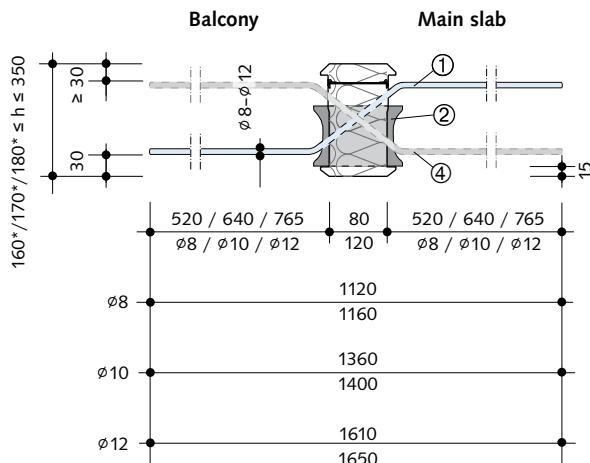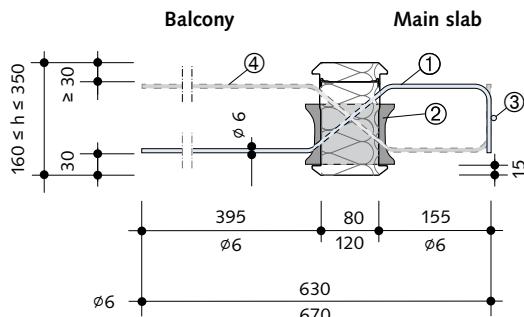


with no CSB for unrestraint connections, e.g. for loggias

Bent type; shear load bars $\varnothing 6$ mm

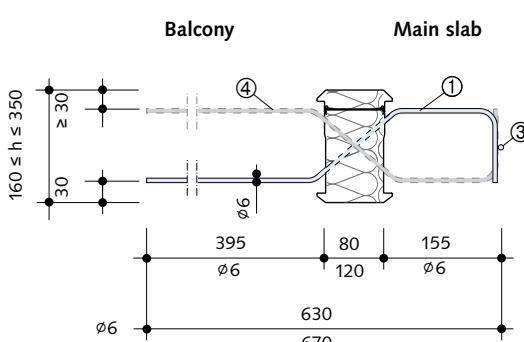

Straight type; shear load bars $\varnothing 8, \varnothing 10, \varnothing 12$ mm
(also available for custom designs in $\varnothing 6$ mm)

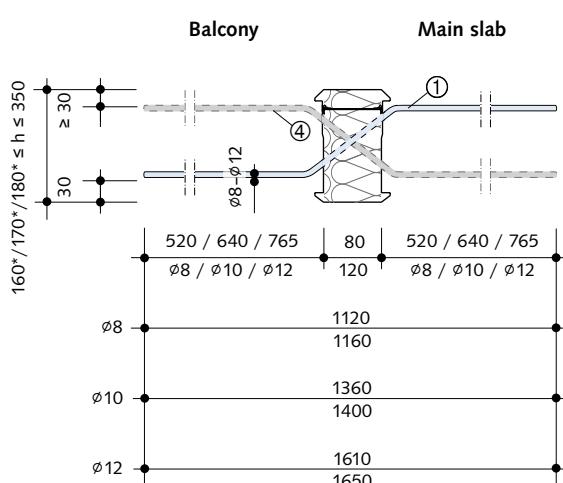

Dimensions in [mm]

- ① Shear load bars for HIT-ZVX Elements
- ② Double-symmetrical CSB
- ③ Load supporting shear bar for shear load bars $\varnothing 6$
- ④ Shear load bars for transferring the shear loads upwards (in the opposite direction) for HIT-ZDX Elements

* smallest available element heights,
depending on the diameter of the shear load bar:
 $\varnothing 6$ from 160 mm
 $\varnothing 8$ from 160 mm
 $\varnothing 10$ from 170 mm
 $\varnothing 12$ from 180 mm

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT

8 Building Physics,
Planning

HIT-HP ZVX, HIT-HP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\varnothing 6 \text{ mm}$, $\varnothing 8 \text{ mm}$ and $\varnothing 10 \text{ mm}$ bar size



ZVX: Shear load capacity
ZDX: Shear load capacity $\pm vRd$



Type / Element width	B = 1.00 m	0202-...-06 ^①		0302-...-06 ^①		0402-...-06 ^①		0502-...-06 ^①		0602-...-06 ^①	
	B = 0.50 m	—		—		0201-...-06		—		0301-...-06	
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30									
Design values vRd [kN/m] for slab thickness [mm]	160–190	29.0	29.0	42.8	42.8	55.9	56.0	68.4	68.8	79.4	79.4
	200–210	29.7	29.7	43.8	43.8	57.6	57.6	70.7	70.9	83.3	83.3
	220–250	30.2	30.2	44.9	44.9	59.3	59.3	73.5	73.5	87.3	87.3
> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.										

① according to approval Z-15.7-312

Type / Element width	B = 1.00 m	0203-...-06		0303-...-06		0403-...-06		0603-...-06		0703-...-06									
	30	Concrete strength: C20/25 \geq C25/30																	
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30																	
Design values vRd [kN/m] for slab thickness [mm]	160–190	29.4	29.4	43.5	43.5	57.4	57.4	83.8	84.0	96.4	96.9								
	200–210	29.9	29.9	44.5	44.5	58.7	58.7	86.4	86.4	99.6	99.8								
	220–250	30.4	30.4	45.3	45.3	60.1	60.1	89.0	89.0	103.2	103.2								
> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.																		



On-site reinforcement $A_{s,req}$

Balcony	$\varnothing 6/25 \text{ cm}$										
Main slab	direct support	$\varnothing 6/20 \text{ cm}$									
	indirect support	$0.26 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/20 \text{ cm}$									

Type / Element width	B = 1.00 m	0804-...-06		B = 1.00 m	0202-...-08		0402-...-08		0502-...-08		
	B = 0.50 m	0402-...-06		B = 0.50 m	0101-...-08		0201-...-08		—		
Lower concrete cover [mm]	30	C20/25 \geq C25/30									
Design values vRd [kN/m] for slab thickness [mm]	160–190	111.8	112.0	160–190	49.3	49.4	85.2	85.2	98.5	98.5	
	200–210	115.2	115.2	200–230	51.5	51.5	93.8	93.8	109.3	109.3	
	220–250	118.7	118.7	240–250	53.0	53.0	102.2	102.3	121.5	121.5	
> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.										



On-site reinforcement $A_{s,req}$

Balcony	$\varnothing 6/25 \text{ cm}$										
	direct support	$\varnothing 6/25 \text{ cm}$									
Main slab	indirect support	$0.31 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/25 \text{ cm}$						$0.26 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6 / 20 \text{ cm}$			



All required verifications for the insulation and for load transfer have already been considered.
Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP ZVX, HIT-HP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\varnothing 10\text{ mm}$ and $\varnothing 12\text{ mm}$ bar size



ZVX: Shear load capacity V_{Rd}
ZDX: Shear load capacity $\pm V_{Rd}$



Type / Element width	B = 1.00 m	0402-...-10 ^①	0403-...-10	0404-...-10	0503-...-10
	B = 0.50 m	0201-...-10	—	0202-...-10	—
Lower concrete cover [mm]	30	Concrete strength: C20/25 ≥ C25/30			
Design values v_{Rd} [kN/m] for slab thickness [mm]	170 – 190	115.2	115.2	131.2	146.9
	200 – 240	128.6	128.6	144.6	155.6
	250	143.9	143.9	159.1	162.4
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.			

① according to approval Z-15.7-312



On-site reinforcement $A_{s,req}$

Balcony		$\varnothing 6/25\text{ cm}$			
Main slab	direct support	$\varnothing 6/20\text{ cm}$			
	indirect support	$0.35\text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/25\text{ cm}$		$0.40\text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/25\text{ cm}$	
Type / Element width	B = 1.00 m	0804-...-08	0604-...-10	0406-...-12	0806-...-12
	B = 0.50 m	0402-...-08	0302-...-10	0203-...-12	0403-...-12
	B = 0.25 m	0201-...-08	—	—	—
Lower concrete cover [mm]	30	Concrete strength: C20/25 ≥ C25/30			
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	152.0 ^①	170.4	—	—
	170	165.3 ^①	170.4	165.3 ^①	188.7
	180	170.4	170.4	178.7 ^①	188.7
	190	170.4	170.4	188.7	201.3 ^①
	200	187.6	187.6	205.3 ^①	214.5
	210	187.6	187.6	208.9	212.7
	220	187.6	187.6	208.9	212.7
	230	187.6	187.6	208.9	224.9
	240	204.3	204.7	208.9	224.9
	250	204.3	204.7	231.8	225.8
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.			

① To utilize the element load capacity of the HIT Elements → see table on page 69



On-site reinforcement $A_{s,req}$

Balcony		$\varnothing 6/25\text{ cm}$	
Main slab	direct support	$\varnothing 6/25\text{ cm}$	
	indirect support	$0.58\text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/25\text{ cm}$	
		$0.86\text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/25\text{ cm}$	



All required verifications for the insulation and for load transfer have already been considered.
Connecting elements must be verified by the planner.

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-HP ZVX, HIT-HP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 6$ mm, $\phi 8$ mm and $\phi 10$ mm bar size



ZVX: Shear load capacity
ZDX: Shear load capacity

V_{Rd}
 $\pm V_{Rd}$

Short unit



Type / Element width	B = 0.33 m	0202-...-08		0302-...-08		0202-...-10		0202-...-12	
Lower concrete cover [mm]	30			Concrete strength: C20/25 ≥ C25/30 ^①					
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	148.1	148.1	158.9 ^①	198.3 ^①	—	—	—	—
	170	148.1	148.1	180.4 ^①	214.7	180.4 ^①	220.5	—	—
	180	148.1	148.1	201.3 ^①	214.7	201.3 ^①	220.5	201.3 ^①	239.4 ^①
	190	148.1	148.1	212.9	214.7	220.5 ^①	220.5	221.7 ^①	256.1 ^①
	200	155.0	155.0	225.2	225.2	224.6 ^①	233.7	237.4 ^①	272.8 ^①
	210	155.0	155.0	225.2	225.2	233.7	233.7	250.8 ^①	275.9
	220	155.0	155.0	225.2	225.2	233.7	233.7	263.3 ^①	304.9
	230	155.0	155.0	225.2	225.2	233.7	233.7	277.4 ^①	304.9
	240	159.8	159.8	234.9	234.9	233.7	233.7	290.8 ^①	304.9
	250	159.8	159.8	234.9	234.9	244.0	244.0	304.1 ^①	304.9
> 250		On request, please contact our technical support team; contact information can be found at the back of the catalogue.							

^① To utilize the element load capacity of the HIT Elements → see table on page 69



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6/25$ cm
Main slab	direct support	$\phi 6/25$ cm
	indirect support	0.44 cm ² /m + V_{Ed} / f_{yd} $\geq \phi 6/25$ cm

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 6$, $\phi 8$, $\phi 10$ and $\phi 12$ mm bar size



ZVX: Shear load capacity in one direction
ZDX: Shear load capacity in both directions



Type / element width	B = 1.00 m	0400-...-06		0500-...-06		0600-...-06		0800-...-06		1000-...-06	
Lower concrete cover [mm]	B = 0.50 m	0200-...-06		—		0300-...-06		0400-...-06		0500-...-06	
	B = 0.25 m	0100-...-06		—		—		0200-...-06		—	
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	31.6	31.6	39.5	39.5	47.4	47.4	63.2	63.2	79.0	79.0
	200–210	34.8	34.8	43.5	43.5	52.2	52.2	69.5	69.5	86.9	86.9
	220–250	40.3	40.3	50.3	50.3	60.4	60.4	80.6	80.6	100.7	100.7
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.									



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6/25$ cm
Main slab	direct support	$\phi 6/20$ cm

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

HIT-HP ZVX, HIT-HP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 6$, $\phi 8$, $\phi 10$ and $\phi 12$ mm bar size



ZVX: Shear load capacity
ZDX: Shear load capacity $\pm V_{Rd}$



Type / Element width	B = 1.00 m	0600-...-08		1200-...-08		0600-...-10		1200-...-10	
	B = 0.50 m	0300-...-08		0600-...-08		0300-...-10		0600-...-10	
	B = 0.25 m	—		0300-...-08		—		0300-...-10	
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30							
Design values V_{Rd} [kN/m] for slab thickness [mm]	160	79.8	79.8	88.0 ^①	110.0 ^①	—	—	—	—
	170	79.8	79.8	101.3 ^①	126.7 ^①	101.3 ^①	124.7	101.3 ^①	126.7 ^①
	180	79.8	79.8	114.7 ^①	143.3 ^①	114.7 ^①	124.7	114.7 ^①	143.3 ^①
	190	79.8	79.8	128.0 ^①	159.7	124.7	124.7	128.0 ^①	160.0 ^①
	200	92.7	92.7	141.3 ^①	176.7 ^①	141.3 ^①	144.9	141.3 ^①	176.7 ^①
	210	92.7	92.7	154.7 ^①	185.4	144.9	144.9	154.7 ^①	193.3 ^①
	220	92.7	92.7	168.0 ^①	185.4	144.9	144.9	168.0 ^①	210.0 ^①
	230	92.7	92.7	181.3 ^①	185.4	144.9	144.9	181.3 ^①	226.7 ^①
	240	107.4	107.4	194.7 ^①	214.8	144.9	144.9	194.7 ^①	243.3 ^①
	250	107.4	107.4	208.0 ^①	214.8	167.8	167.8	208.0 ^①	260.0 ^①
> 250		On request, please contact our technical support team; contact information can be found at the back of the catalogue.							

^① To utilize the element load capacity of the HIT Elements → see table on page 69



On-site reinforcement $A_{s,req}$

Balcony	$\phi 6/25$ cm	
Main slab	direct support	$\phi 6/25$ cm
	indirect support	$V_{Ed} / f_{yd} \geq \phi 6/25$ cm

Type / Element width	B = 1.00 m	0600-...-12		0700-...-12		0800-...-12		1200-...-12	
	B = 0.50 m	0300-...-12		—		0400-...-12		0600-...-12	
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30							
Design values V_{Rd} [kN/m] for slab thickness [mm]	180	114.7 ^①	143.3 ^①	114.7 ^①	143.3 ^①	114.7 ^①	143.3 ^①	114.7 ^①	143.3 ^①
	190	128.0 ^①	160.0 ^①	128.0 ^①	160.0 ^①	128.0 ^①	160.0 ^①	128.0 ^①	160.0 ^①
	200	141.3 ^①	176.7 ^①	141.3 ^①	176.7 ^①	141.3 ^①	176.7 ^①	141.3 ^①	176.7 ^①
	210	154.7 ^①	179.6	154.7 ^①	193.3 ^①	154.7 ^①	193.3 ^①	154.7 ^①	193.3 ^①
	220	168.0 ^①	208.6	168.0 ^①	210.0 ^①	168.0 ^①	210.0 ^①	168.0 ^①	210.0 ^①
	230	181.3 ^①	208.6	181.3 ^①	226.7 ^①	181.3 ^①	226.7 ^①	181.3 ^①	226.7 ^①
	240	194.7 ^①	208.6	194.7 ^①	243.3 ^①	194.7 ^①	243.3 ^①	194.7 ^①	243.3 ^①
	250	208.0 ^①	208.6	208.0 ^①	243.4 ^①	208.0 ^①	260.0 ^①	208.0 ^①	260.0 ^①
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.							

^① To utilize the element load capacity of the HIT Elements → see table on page 69



On-site reinforcement $A_{s,req}$

Balcony	$\phi 6/25$ cm	
Main slab	direct support	$\phi 6/25$ cm
	indirect support	$V_{Ed} / f_{yd} \geq \phi 6/25$ cm

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-HP ZVX, HIT-HP ZDX / HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\varnothing 8 \text{ mm}$, $\varnothing 12 \text{ mm}$ bar sizes



ZVX: Shear load capacity V_{Rd}
ZDX: Shear load capacity $\pm V_{Rd}$



Type / Element width	B = 0.33 m	0300-...-08		0500-...-08		0500-...-10		0400-...-12	
Lower concrete cover [mm]	30			Concrete strength: C20/25 \geq C25/30					
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	88.0 ^①	110.0 ^①	88.0 ^①	110.0 ^①	—	—	—	—
	170	101.3 ^①	119.7	101.3 ^①	126.7 ^①	101.3 ^①	126.7 ^①	—	—
	180	114.7 ^①	119.7	114.7 ^①	143.3 ^①	114.7 ^①	143.3 ^①	114.7 ^①	143.3 ^①
	190	119.7	119.7	128.0 ^①	160.0 ^①	128.0 ^①	160.0 ^①	128.0 ^①	160.0 ^①
	200	139.1	139.1	141.3 ^①	176.7 ^①	141.3 ^①	176.7 ^①	141.3 ^①	176.7 ^①
	210	139.1	139.1	154.7 ^①	193.3 ^①	154.7 ^①	193.3 ^①	154.7 ^①	193.3 ^①
	220	139.1	139.1	168.0 ^①	210.0 ^①	168.0 ^①	210.0 ^①	168.0 ^①	210.0 ^①
	230	139.1	139.1	181.3 ^①	226.7 ^①	181.3 ^①	226.7 ^①	181.3 ^①	226.7 ^①
	240	161.1	161.1	194.7 ^①	243.3 ^①	194.7 ^①	243.3 ^①	194.7 ^①	243.3 ^①
	250	161.1	161.1	208.0 ^①	260.0 ^①	208.0 ^①	260.0 ^①	208.0 ^①	260.0 ^①
> 250		On request, please contact our technical support team; contact information can be found at the back of the catalogue.							

① To utilize the element load capacity of the HIT Elements → see table on page 69



On-site reinforcement $A_{s,req}$

Balcony		$\varnothing 6/25 \text{ cm}$
Main slab	direct support	$\varnothing 6/25 \text{ cm}$
	indirect support	$V_{Ed} / f_{yd} \geq \varnothing 6/25 \text{ cm}$

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\varnothing 6 \text{ mm}$, $\varnothing 8 \text{ mm}$, $\varnothing 10 \text{ mm}$ bar sizes



ZVX: Shear load capacity V_{Rd}
ZDX: Shear load capacity $\pm V_{Rd}$



Type / Element width	B = 1.00 m	0302-...-06 ^①		0402-...-06 ^①		0502-...-06 ^①		0602-...-06 ^①		0702-...-06 ^①	
	B = 0.50 m	—		0201-...-06	—		0301-...-06	—		—	
Lower concrete cover [mm]	30			Concrete strength: C20/25 \geq C25/30							
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	34.6	34.7	45.0	45.4	55.0	55.6	64.3	65.4	73.2	74.7
	200–210	36.7	36.8	48.0	48.2	58.8	59.3	69.1	69.9	79.0	80.2
	220–250	39.0	39.0	51.2	51.4	63.1	63.4	74.6	75.1	85.8	86.6
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.									

① according to approval Z-15.7-312



On-site reinforcement $A_{s,req}$

Balcony		$\varnothing 6/25 \text{ cm}$
Main slab	direct support	$\varnothing 6/20 \text{ cm}$
	indirect support	$0.30 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \varnothing 6/20 \text{ cm}$

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 6 \text{ mm}$, $\phi 8 \text{ mm}$, $\phi 10 \text{ mm}$ bar sizes



ZVX: Shear load capacity
ZDX: Shear load capacity

V_{Rd}
 $\pm V_{Rd}$

120

Type / Element width	B = 1.00 m	0203-...-06	0303-...-06	0403-...-06	0603-...-06	0803-...-06
Lower concrete cover [mm]	30		Concrete strength: C20/25 ≥ C25/30			
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	23.9	23.9	35.4	46.5	46.6
	200–210	25.2	25.2	37.4	49.2	49.3
	220–250	26.5	26.5	39.5	52.2	52.2
	> 250				76.9	77.0

On request, please contact our technical support team; contact information can be found at the back of the catalogue.



On-site reinforcement $A_{s,\text{req}}$

Balcony		$\phi 6 / 25 \text{ cm}$
Main slab	direct support	$\phi 6 / 20 \text{ cm}$
	indirect support	$0.28 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \phi 6 / 20 \text{ cm}$

Type / Element width	B = 1.00 m	0403-...-08	0503-...-08	0602-...-08	0604-...-08	0804-...-08					
	B = 0.50 m	—	—	0301-...-08	0302-...-08	0402-...-08					
	B = 0.25 m	—	—	—	—	0201-...-08					
Lower concrete cover [mm]	30		Concrete strength: C20/25 ≥ C25/30								
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	76.5	77.4	92.7	94.3	97.1					
	200–230	84.0	84.7	102.6	103.8	111.3	111.8	113.0	114.6	143.6	146.9
	240–250	90.1	90.5	110.7	111.4	123.4	124.7	134.0	134.7	174.1	175.6
	> 250										

On request, please contact our technical support team; contact information can be found at the back of the catalogue.



On-site reinforcement $A_{s,\text{req}}$

Balcony		$\phi 6 / 25 \text{ cm}$
Main slab	direct support	$\phi 6 / 25 \text{ cm}$
	indirect support	$0.33 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \phi 6 / 25 \text{ cm}$
		$0.49 \text{ cm}^2/\text{m} + V_{Ed} / f_{yd} \geq \phi 6 / 25 \text{ cm}$



All required verifications for the insulation and for load transfer have already been considered.
Connecting elements must be verified by the planner.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 8 \text{ mm}$, $\phi 10 \text{ mm}$ and $\phi 12 \text{ mm}$ bar sizes



ZVX: Shear load capacity
ZDX: Shear load capacity

V_{Rd}
 $\pm V_{Rd}$



Type / Element width	B = 1.00 m	0406-...-12	0604-...-10	0804-...-10	0606-...-12	0806-...-12
	B = 0.50 m	0203-...-12	0302-...-10	0402-...-10	0303-...-12	0403-...-12
	B = 0.25 m	—	—	0201-...-10	—	—
Lower concrete cover [mm]	30	Concrete strength: C20/25 ≥ C25/30				
Design values v_{Rd} [kN/m] for slab thickness [mm]	170	—	—	160.6 ^①	166.4	190.7 ^①
	180	169.5	171.9	162.6	166.4	176.1 ^①
	190	169.5	171.9	162.6	166.4	190.4 ^①
	200	169.5	171.9	183.0	186.6	201.6 ^①
	210	169.5	171.9	183.0	186.6	216.3 ^①
	220	186.9	188.6	183.0	186.6	229.5
	230	186.9	188.6	183.0	186.6	229.5
	240	186.9	188.6	183.0	186.6	229.5
	250	186.9	188.6	200.1	202.6	255.3
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.				

① To utilize the element load capacity of the HIT Elements → see table page 70



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6 / 25 \text{ cm}$				
Main slab	direct support	$\phi 6 / 25 \text{ cm}$				
Type / Element width	B = 0,33 m	0202-...-08	0302-...-08	0202-...-10	0302-...-10	0302-...-12
Lower concrete cover [mm]	30	Concrete strength: C20/25 ≥ C25/30				
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	118.4	119.2	153.1 ^①	172.1	—
	170	118.4	119.2	169.7	172.1	175.7
	180	118.4	119.2	169.7	172.1	175.7
	190	118.4	119.2	169.7	172.1	175.7
	200	129.1	129.8	187.1	188.8	194.0
	210	129.1	129.8	187.1	188.8	194.0
	220	129.1	129.8	187.1	188.8	194.0
	230	129.1	129.8	187.1	188.8	194.0
	240	137.6	137.8	201.2	202.2	194.0
	250	137.6	137.8	201.2	202.2	208.9
On request, please contact our technical support team; contact information can be found at the back of the catalogue.					210.1	287.6 ^①

① To utilize the element load capacity of the HIT Elements → see table on page 70



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6 / 25 \text{ cm}$		
Main slab	direct support	$\phi 6 / 25 \text{ cm}$		
Type / Element width	B = 0,33 m	0.47 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$	0.63 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$	0.79 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$
Lower concrete cover [mm]	30	0.47 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$	0.63 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$	0.79 $\text{cm}^2/\text{m} + V_{Ed} / f_{yd}$ $\geq \phi 6 / 25 \text{ cm}$

HALFEN HIT INSULATED CONNECTOR SUPERIOR PERFORMANCE

HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)

$\phi 8 \text{ mm}$, $\phi 10 \text{ mm}$ and $\phi 12 \text{ mm}$ bar sizes



ZVX: Shear load capacity
ZDX: Shear load capacity

v_{Rd}
 $\pm v_{Rd}$

Concrete strength: C20/25 \geq C25/30



Type / Element width	B = 1.00 m	0500...-06	0600...-06	0800...-06	0900...-06	1200...-06				
	B = 0.50 m	—	0300...-06	0400...-06	—	0600...-06				
	B = 0.25 m	—	—	0200...-06	—	0300...-06				
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30								
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	32.6	32.6	39.1	52.1	52.1	58.6	58.6	78.2	78.2
	200–210	37.4	37.4	44.9	59.9	59.9	67.4	67.4	89.8	89.8
	220–250	43.5	43.5	52.2	69.5	69.5	78.2	78.2	104.3	104.3
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.								



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6/25 \text{ cm}$					
Main slab	direct support	$\phi 6/20 \text{ cm}$					
	indirect support	$V_{Ed} / f_{yd} \geq \phi 6/20 \text{ cm}$					

Type / Element width	B = 1.00 m	0400...-08	0600...-08	0700...-08	0800...-08			
	B = 0.50 m	0200...-08	0300...-08	—	0400...-08			
	B = 0.25 m	0100...-08	—	—	0200...-08			
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30						
Design values v_{Rd} [kN/m] for slab thickness [mm]	160–190	43.7	43.7	65.6	76.5	76.5	87.4	87.4
	200–230	53.2	53.2	79.8	93.1	93.1	106.4	106.4
	240–250	61.8	61.8	92.7	108.2	108.2	123.6	123.6
	> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.						



On-site reinforcement $A_{s,req}$

Balcony		$\phi 6/25 \text{ cm}$					
Main slab	direct support	$\phi 6/25 \text{ cm}$					
	indirect support	$V_{Ed} / f_{yd} \geq \phi 6/25 \text{ cm}$					



All required verifications for the insulation and for load transfer have already been considered. Connecting elements must be verified by the planner.

HALFEN HIT ISO-ELEMENT SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD
ZVX/ZDX4
DD5
HT / EQ6
AT / FT / OTX / FK7
ST / WT8
Building Physics,
Planning

HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2) $\varnothing 6 \text{ mm}$, $\varnothing 8 \text{ mm}$, $\varnothing 10 \text{ mm}$ and $\varnothing 12 \text{ mm}$ bar size



ZVX: Shear load capacity

ZDX: Shear load capacity

 V_{Rd} $\pm V_{Rd}$ Concrete strength: C20/25 \geq C25/30

Type / Element width	B = 1.00 m	0900-...-08	0600-...-10	0700-...-10	0800-...-10	1000-...-10
	B = 0.50 m	—	0300-...-10	—	0400-...-10	0500-...-10
	B = 0.25 m	—	—	—	0200-...-10	—
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30				
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	88.0 ^①	98.3	—	—	—
	170	98.3	98.3	101.3 ^①	102.4	101.3 ^①
	180	98.3	98.3	102.4	102.4	114.7 ^①
	190	98.3	98.3	102.4	102.4	119.5
	200	119.7	119.7	124.7	124.7	141.3 ^①
	210	119.7	119.7	124.7	124.7	145.5
	220	119.7	119.7	124.7	124.7	145.5
	230	119.7	119.7	124.7	124.7	145.5
	240	139.1	139.1	124.7	124.7	166.3
	250	139.1	139.1	144.9	144.9	166.3
> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.					



On-site reinforcement $A_{s,req}$

Balcony	$\varnothing 6 / 25 \text{ cm}$					
Main slab	direct support $\varnothing 6 / 25 \text{ cm}$					
	indirect support $V_{Ed} / f_{yd} \geq \varnothing 6 / 25 \text{ cm}$					

Type / Element width	B = 0.33 m	0300-...-08	0400-...-08	0300-...-10	0500-...-10	0400-...-12
Lower concrete cover [mm]	30	Concrete strength: C20/25 \geq C25/30				
Design values v_{Rd} [kN/m] for slab thickness [mm]	160	88.0 ^①	98.3	88.0 ^①	110.0 ^①	—
	170	98.3	98.3	101.3 ^①	126.7 ^①	101.3 ^①
	180	98.3	98.3	114.7 ^①	131.1	114.7 ^①
	190	98.3	98.3	128.0 ^①	131.1	128.0 ^①
	200	119.7	119.7	141.3 ^①	159.7	141.3 ^①
	210	119.7	119.7	154.7 ^①	159.7	154.7 ^①
	220	119.7	119.7	159.7 ^①	159.7	168.0 ^①
	230	119.7	119.7	159.7 ^①	159.7	181.3 ^①
	240	139.1	139.1	185.4	185.4	187.1
	250	139.1	139.1	185.4	185.4	208.0 ^①
> 250	On request, please contact our technical support team; contact information can be found at the back of the catalogue.					

① To utilize the element load capacity of the HIT Elements → see table on page 70



On-site reinforcement $A_{s,req}$

Balcony	$\varnothing 6 / 25 \text{ cm}$					
Main slab	direct support $\varnothing 6 / 25 \text{ cm}$					
	indirect support $V_{Ed} / f_{yd} \geq \varnothing 6 / 25 \text{ cm}$					

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

HIT-HP ZVX, HIT-HP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)



ZVX: Maximal load capacity
ZDX: Maximal load capacity

VRd
 $\pm \text{VRd}$

Concrete strength: C20/25 \geq C25/30



with CSB $\varnothing 8 / \varnothing 10 / \varnothing 12^{\circledR}$	B = 1.00 m	0804-...-08	B = 1.00 m	0604-...-10	B = 1.00 m	0406-...-12	0806-...-12
	B = 0.50 m	0402-...-08	B = 0.50 m	0302-...-10	B = 0.50 m	0203-...-12	0403-...-12
	B = 0.25 m	0201-...-08	—	—	—	—	—
Design values $\text{VRd,Element [kN/m]}$ for slab thickness [mm]	160–190	170.4	170.4	170–190	188.7	188.7	180–210
	200–230	187.6	187.6	200–240	208.9	208.9	220–350
	240–350	204.3	204.7	250–350	231.8	231.8	

with CSB $\varnothing 8 / \varnothing 12^{\circledR}$	B = 0.33 m	0302-...-08		B = 0.33 m	0202-...-10		B = 0.33 m	0202-...-12	
		0302-...-08	B = 0.33 m		0202-...-10	B = 0.33 m		0202-...-12	
Design values $\text{VRd,Element [kN/m]}$ for slab thickness [mm]	160–190	212.9	214.7	170–190	220.5	220.5	180–210	275.9	275.9
	200–230	225.2	225.2	200–240	233.7	233.7	220–350	304.9	304.9
	240–350	234.9	234.9	250–350	244.0	244.0			

① Bar diameter in [mm]



ZVX: Maximal load capacity in one direction
ZDX: Maximal load capacity in both directions

Concrete strength: C20/25 \geq C25/30



no CSB $\varnothing 8 / \varnothing 10^{\circledR}$	B = 1.00 m	1200-...-08	B = 1.00 m	0600-...-10	1200-...-10
	B = 0.50 m	0600-...-08	B = 0.50 m	0300-...-10	0600-...-10
	B = 0.25 m	0300-...-08	B = 0.25 m	—	0300-...-10
Design values $\text{VRd,Element [kN/m]}$ for slab thickness [mm]	160–190	159.7	159.7	170–190	124.7
	200–230	185.4	185.4	200–240	144.9
	240–350	214.8	214.8	250–350	167.8

no CSB $\varnothing 12^{\circledR}$	B = 1.00 m	0600-...-12	0700-...-12	0800-...-12	1200-...-12
	B = 0.50 m	0300-...-12	—	0400-...-12	0600-...-12
Design values $\text{VRd,Element [kN/m]}$ for slab thickness [mm]	180–210	179.6	179.6	209.5	239.5
	220–350	208.6	208.6	243.4	278.2

no CSB $\varnothing 8 / \varnothing 10 / \varnothing 12^{\circledR}$	B = 0.33 m	0300-...-08		B = 0.33 m	0500-...-08		B = 0.33 m	0500-...-10		B = 0.33 m	0400-...-12	
		0300-...-08	B = 0.33 m		0500-...-08	B = 0.33 m		0500-...-10	B = 0.33 m		0400-...-12	
Design values $\text{VRd,Element [kN/m]}$ for slab thickness [mm]	160–190	119.7	119.7	185.3	199.6	170–190	289.5	311.8	180–210	333.6	359.2	
	200–230	139.1	139.1	215.2	231.8	200–240	336.3	362.2	220–350	387.4	417.2	
	240–350	161.1	161.1	249.4	268.5	250–350	389.6	419.6				

① Bar diameter in [mm]



Verifications for main slab load capacity (under consideration of concrete compression strut verification) are included in the load bearing capacity tables on pages 60 to 68. With some elements the maximum load bearing capacities of the steel load capacity of the elements can be utilized if a higher concrete

strength is selected or other geometrical boundary conditions are present. The element load capacity VRd,Element can be found on this page.

The concrete compression strut must be verified by the planner separately.

HALFEN HIT ISO-ELEMENT SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-SP ZVX, HIT-SP ZDX

Load bearing capacity values according to EN 1992-1-1 (EC2)



**ZVX: Maximal load capacity
ZDX: Maximal load capacity**

V_{Rd}
 $\pm V_{Rd}$

Concrete strength: C20/25 ≥C25/30

120

with CSB Ø8 / Ø10 ^①	B = 1.00 m	0604-...-10		0804-...-10		B = 1.00 m	0606-...-12		0806-...-12	
	B = 0.50 m	—		0402-...-10		B = 0.50 m	0303-...-12		0403-...-12	
	B = 0.25 m	—		0201-...-10		B = 0.25 m	—		—	
Design values $V_{Rd,Element}$ [kN/m] for slab thickness [mm]	170–190	162.6	166.4	199.6	200.6	180–210	236.4	242.8	291.4	292.7
	200–240	183.0	186.6	229.5	230.3	220–350	265.3	270.3	333.8	335.5
	250–350	200.1	202.6	255.3	257.2					

with CSB Ø8 / Ø12 ^①	B = 0.33 m	0302-...-08		B = 0.33 m	0202-...-10		0302-...-10		B = 0.33 m	0302-...-12	
	160–190	169.7	172.1	170–190	175.7	178.4	244.2	249.9	180–210	300.0	317.6
	200–230	187.1	188.8	200–240	194.0	195.9	274.7	280.1	220–350	345.0	365.8
240–350	201.2	202.2	250–350	208.9	210.1	300.5	304.3				

① Bar diameter in [mm]



**ZVX: Maximal load capacity
ZDX: Maximal load capacity**

V_{Rd}
 $\pm V_{Rd}$

120

No CSB Ø8 ^①	B=1.00 m		0900-...-08					
	160–190		98.3					
	200–240		119.7					
240–350			139.1					

No CSB Ø10 ^①	B = 1.00 m	0600-...-10		0700-...-10		0800-...-10		1000-...-10	
	B = 0.50 m	0300-...-10		—		0400-...-10		0500-...-10	
	B = 0.25 m	—		—		0200-...-10		—	
Design values $V_{Rd,Element}$ [kN/m] for slab thickness [mm]	170–190	102.4	102.4	119.5	119.5	136.6	136.6	170.7	170.7
	200–240	124.7	124.7	145.5	145.5	166.3	166.3	207.9	207.9
	250–350	144.9	144.9	169.0	169.0	193.2	193.2	241.5	241.5

① Bar diameter in [mm]

No CSB Ø8 / Ø10 / Ø12 ^①	B = 0.33 m	0300-...-08		0400-...-08		B = 0.33 m	0300-...-10		0500-...-10		B = 0.33 m	0400-...-12	
	160–190	98.3	98.3	131.1	131.1	170–190	153.7	153.7	237.8	256.1	180–210	274.0	295.0
	200–230	119.7	119.7	159.7	159.7	200–240	187.1	187.1	289.5	311.8	220–350	333.6	359.2
240–350	139.1	139.1	185.4	185.4	250–350	217.3	217.3	336.3	362.2				

① Bar diameter in [mm]



Verifications for main slab load capacity (under consideration of concrete compression strut verification) are included in the load bearing capacity tables on pages 60–68. With some elements the maximum load bearing capacities of the steel load capacity of the elements can be utilized if a higher concrete

strength is selected or other geometrical boundary conditions are present. The element load capacity $V_{Rd,Element}$ can be found on this page.


The concrete compression strut must be verified by the planner separately.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP/SP ZVX, HIT-HP/SP ZDX

Application examples in wall cross sections


Installation diagram: Masonry cladded with ETICS (external thermal insulation composite system)

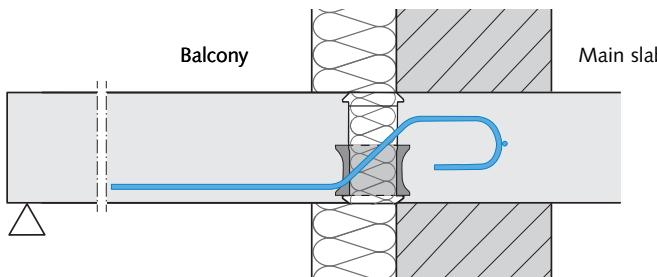


Installation diagram: Stair landing entrance to a building

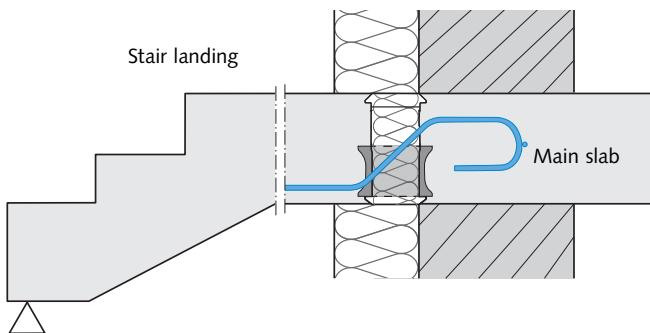

Installation diagram: Single-leaf masonry with balcony at main slab level

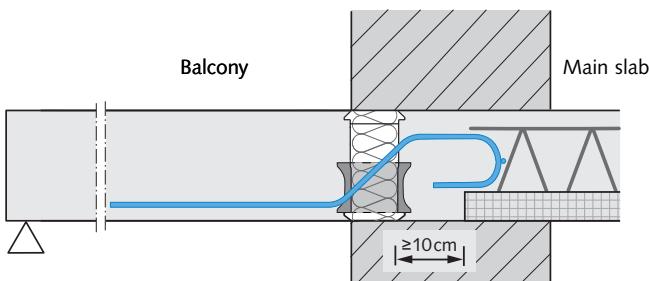


Installation diagram: Double-leaf masonry with balcony at main slab level

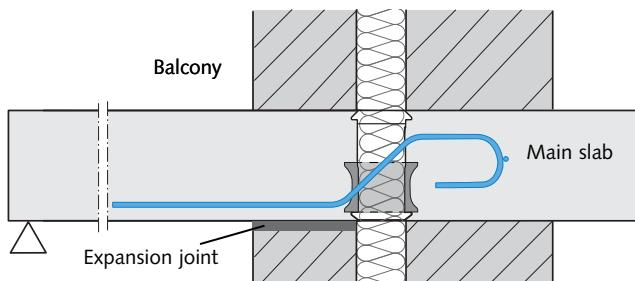


The dimension of the shear load bars has been optimized.
During installation in main element slab the bars remain above the main element slab with all HIT heights.

Application examples / Expansion joint placement

Application 1: Expansion joint placement in linear balcony connections

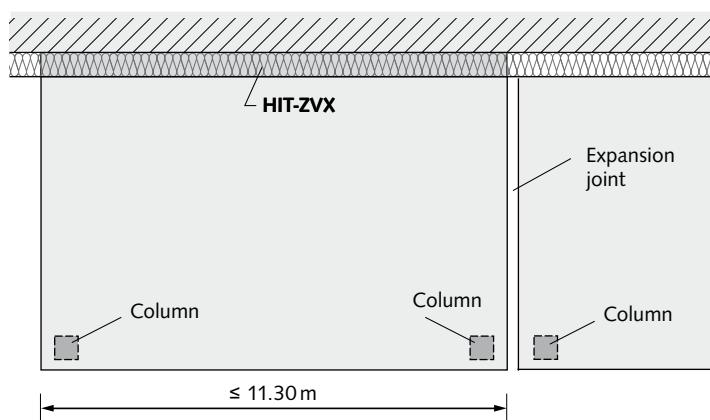

Application 2: Expansion joints in a corner balcony

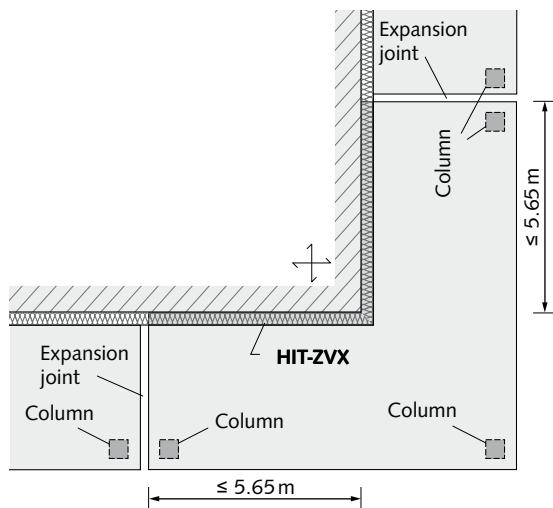

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7


ST / WT

8


Building Physics,
Planning

HIT-HP/SP ZVX, HIT-HP/SP ZDX


Application 3: Expansion joint location for three-side supported loggia (with CSB on the left or right)

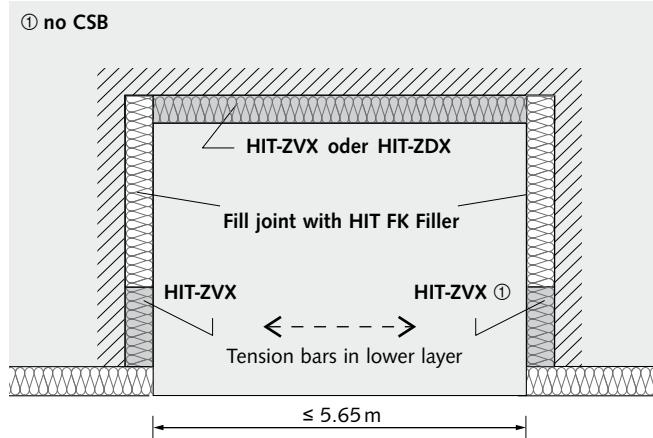


Application 4: Expansion joint location for two-side supported loggia (with CSB on the left or right)

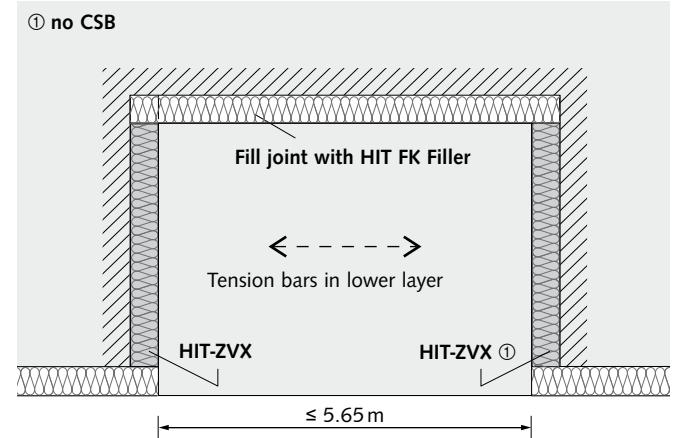

Application 5: Expansion joint for three-side supported loggia (left and right sides without CSB)

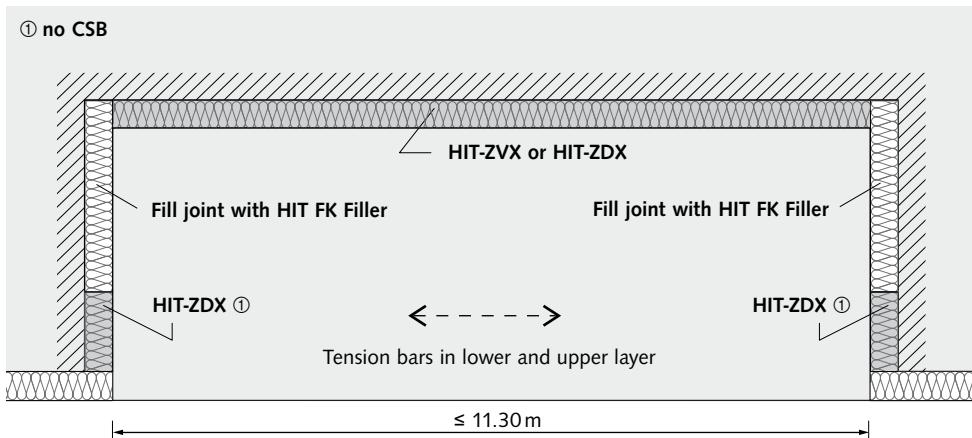


Application 6: Expansion joint for two-side supported loggia (left and right sides without CSB)

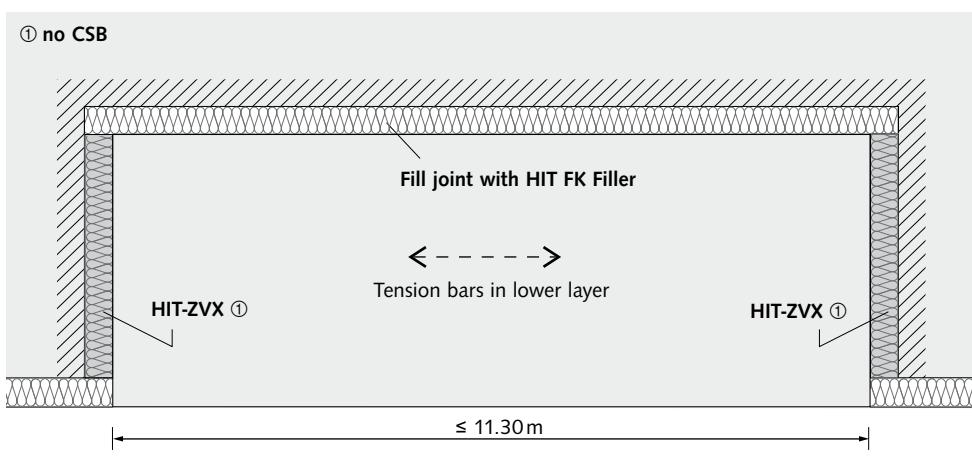

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE



HIT-HP/SP ZVX, HIT-HP/SP ZDX

On-site reinforcement

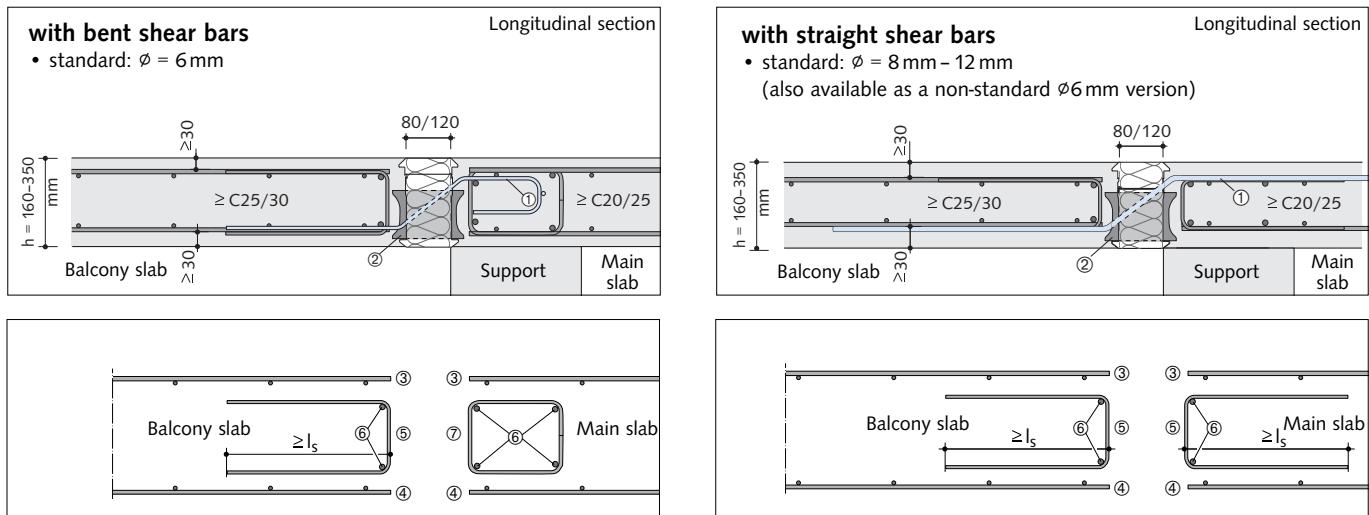

Dimensions in [mm]

- ① HIT-Shear load bar (bei Ø 6 mm with load-bearing cross bar)
- ② Double-symmetrical CSB
- ③ Upper connecting reinforcement, steel bars or mesh
- ④ Lower connecting reinforcement, steel bars or mesh

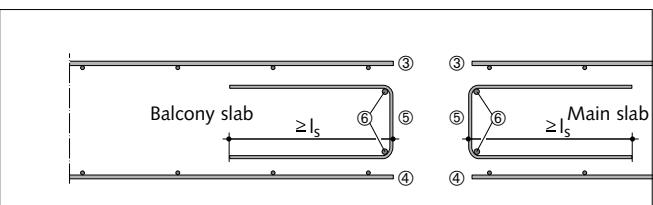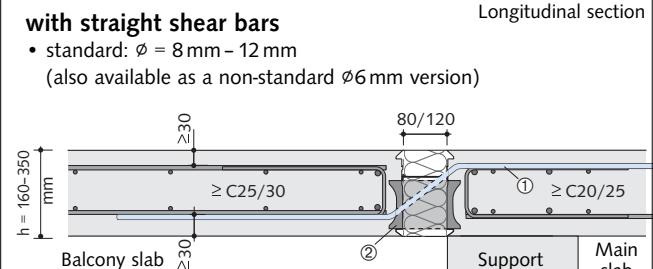

- ⑤ U-bar → $A_{s,req}$, see pages 60–68
- ⑥ Transverse tensile reinforcement Ø 8
- ⑦ Edge reinforcement (min. Ø 6/20)


Moments from eccentric loads

Moments resulting from an eccentric load must be considered when calculating for **HIT-HP/SP ZVX and ZDX with CSB**.


The following applies:

$$\Delta M_{Ed} = V_{Ed} \cdot t_{joint}$$

with: $t_{joint} = 0.08 \text{ m}$ (HIT-HP ZVX/ZDX)
 $t_{joint} = 0.12 \text{ m}$ (HIT-SP ZVX/ZDX)

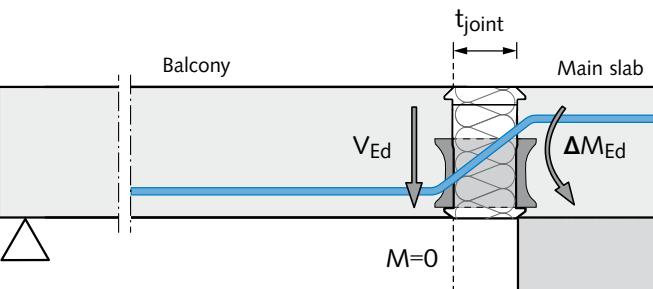

On-site transverse reinforcement

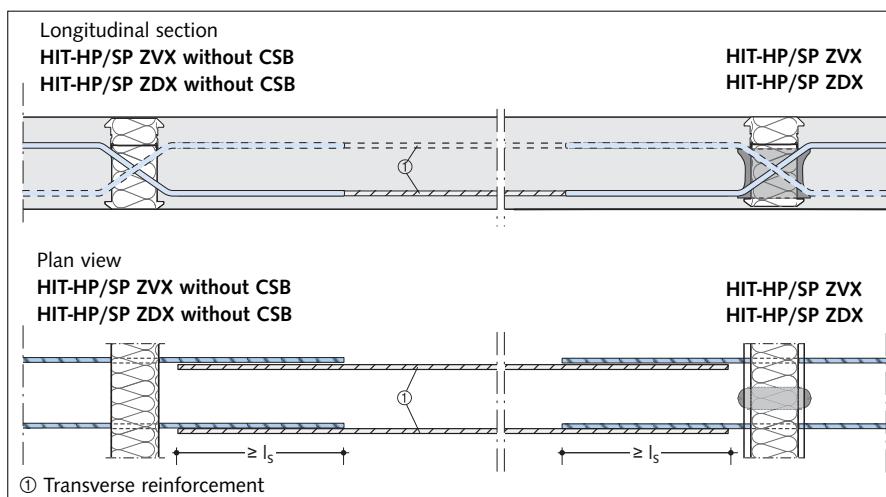

i Transverse reinforcement







When placing the transverse reinforcement in the balcony slab, each shear bar in the HIT Element (HP/SP ZVX or ZDX) must overlap with an on-site reinforcement bar of the same diameter.

The on-site bar must extend to the opposite HIT Element where it must also overlap with the shear bars.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP/SP ZVX, HIT-HP/SP ZDX

Installation diagram

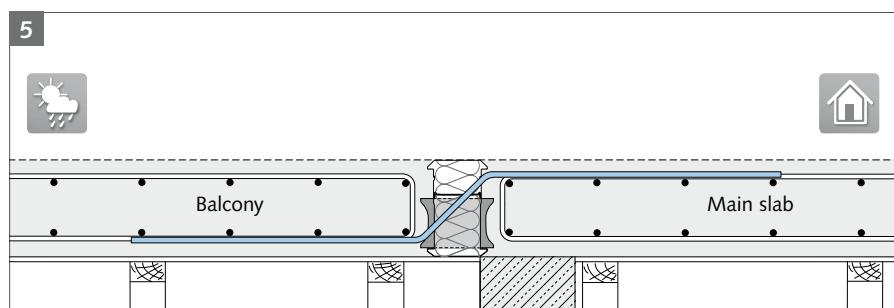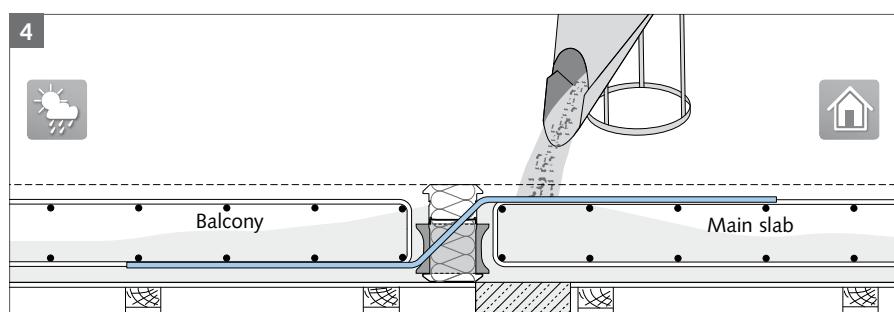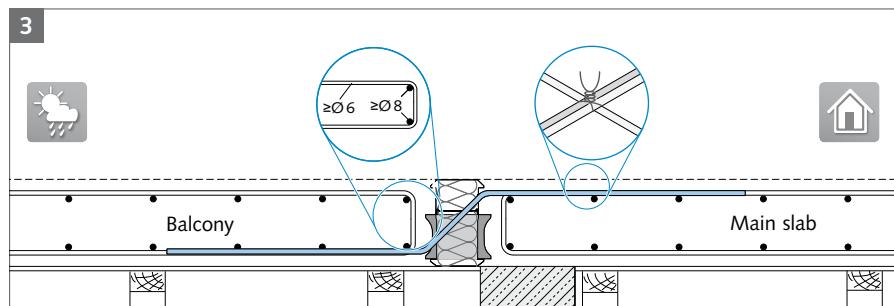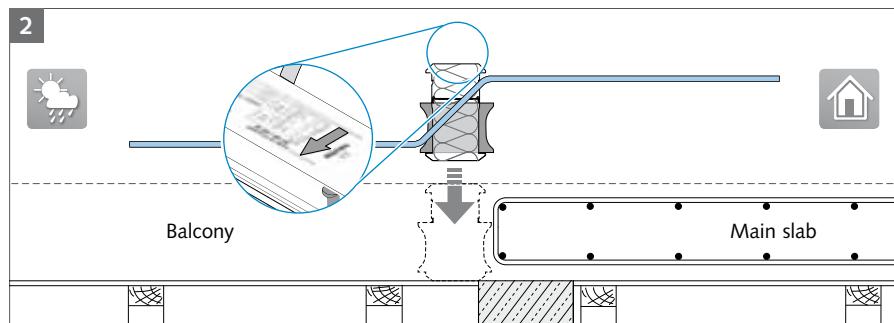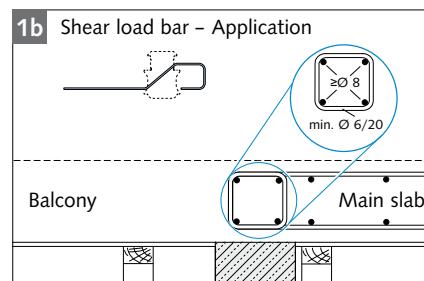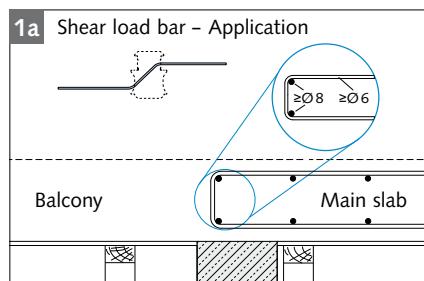


1 Installation of on-site reinforcement for the main slab

⚠️ On-site reinforcement as specified by the structural engineer.

2 Installation of HIT Elements from above

HIT-ZDX Elements with bar diameters of Ø8, 10 or 12 are symmetrical and do not have a dedicated installation direction.

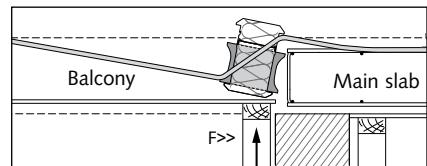

⚠️ Ensure that the formwork is at the correct height!

3 Installation of the on-site reinforcement, balcony side

Fixing of the shear bars to on-site reinforcement using tying wire.

4 Pouring the concrete

⚠️ To ensure the HIT Elements are not displaced, pour and compact the concrete evenly.

5 Freshly poured concrete balcony slab on support structure

i Further installation diagrams for the types HIT-HP/SP ZVX and HIT-HP/SP ZDX can be found in the installation instructions – available for download at our website www.halfen.com.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP DD, HIT-SP DD

4

- For balcony slabs incorporated in the main slab
- Transfers positive and negative moments and shear forces




type-tested

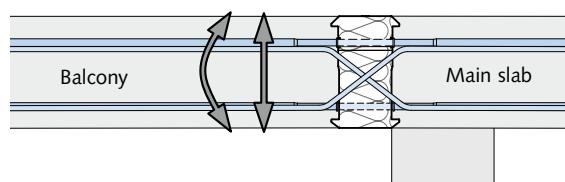

HIT-HP DD – High Performance 80 mm insulation thickness

HIT-SP DD – Superior Performance 120 mm insulation thickness

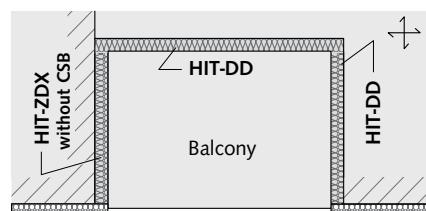

Application: Continuous slab

Content	Type	Page
Product types / Load range	HIT-HP DD, HIT-SP DD	76
Load bearing capacity values	HIT-HP DD, HIT-SP DD	77
Maximum load capacities	HIT-HP DD, HIT-SP DD	81
Product description	HIT-HP DD, HIT-SP DD	82
Installation diagram	HIT-HP DD, HIT-SP DD	83

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-HP DD, HIT-SP DD

Load range

All types are available with shear load bar diameters 6 mm, 8 mm, 10 mm or 12 mm.

The following combinations of shear load bar SB (shear bars) and tension load bar TB are possible:

Possible combinations of support elements

Element width B = 25 cm		No. tension /compression bars n _{TB}								
		1	2							
Number of shear load bars n _{SB}	1	●	●							
Element width B = 50 cm		Number of tension /compression bars n _{TB}								
Number of shear load bars n _{SB}	2	2	3	4	5	6				
	3	●	●	●	●	●				
Element width B = 100 cm		Number of tension /compression bars n _{TB}								
Number of shear load bars n _{SB}	4	4	5	6	7	8	10	12	14	
	6	●	●	●	●	●	●	●	●	
	7	●	●	●	●	●	●	●	●	


Load bearing capacity values for selected element can be found on pages 77–80

● = HP and SP



The complete type-tested load class range for concrete grades C20/25 and ≥C25/30 can be downloaded at www.halfen.com.

Basic types – Ordering example

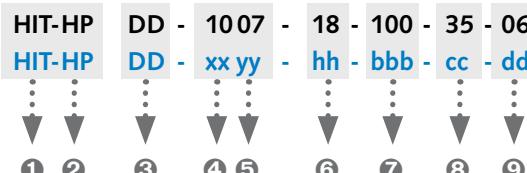

Type description

- ① Product group
- ② Insulation thickness 80 mm (HP)
120 mm (SP)
- ③ Connection type
- ④ No. tension/compression bars
- ⑤ No. shear load bars on each side
- ⑥ Element height [cm]
- ⑦ Element width [cm]
- ⑧ Upper concrete cover [mm]
- ⑨ Diameter shear load bars [mm]



HIT Custom solutions

Our technical support team is available to provide support in your project with custom solutions using HALFEN HIT Insulated connections

Contact: → see inside back cover

Possible slab thickness h

Lower concrete cover: 30 mm / upper concrete cover: 30, 35 mm				
Diameter of the shear load bars [mm]	06	08	10	12
Possible main slab heights h [cm]	16–35	16–35	17–35	18–35
Lower concrete cover: 30 mm / upper concrete cover: 50 mm				
Diameter of the shear load bars [mm]	06	08	10	12
Possible main slab heights h [cm]	18–35	18–35	19–35	20–35

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

HIT-HP DD

Decoding the type selection: HIT-HP DD, tension/compression bars

Number of tension/compression bars xx			05		07		10		12		14		
Concrete cover [mm]	30	35	50	Concrete strength: C20/25 ≥ C25/30:									
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160	160		20.4	20.4	28.6	28.6	40.8	40.8	49.0	49.0	55.5	57.2
	160	180		21.6	21.6	30.3	30.3	43.3	43.3	52.0	52.0	58.5	60.6
	170	170		22.9	22.9	32.0	32.0	45.8	45.8	54.6	54.9	61.5	64.1
	170	190		24.1	24.1	33.8	33.8	48.2	48.2	57.2	57.9	64.5	67.5
	180	180		25.3	25.3	35.5	35.5	50.7	50.7	59.8	60.8	67.5	70.9

Specifications

Main slab thickness: 18 cm Bending moment: $m_{Rd} \geq 50.7 \text{ kNm/m}$ Calculated number of tension/compression bars (xx): 10
 Concrete strength: C20/25 Shear load*: $v_{Rd} \geq 55.3 \text{ kN/m}$ Calculated number of shear load bars (yy)*: 07
 Concrete cover: 35 mm

Compiled type description: HIT-HP DD-1007*-18-100-35-06

*Determine the shear load bars for HIT-HP DD → see tables on page 78

Load bearing capacity values according to EN 1992-1-1 (EC2)



Moment bearing capacity $\pm m_{Rd}$



Number of tension/compression bars xx			05		07		10		12		14		
Concrete cover [mm]	30	35	50	Concrete strength: C20/25 ≥ C25/30:									
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160			20.4	20.4	28.6	28.6	40.8	40.8	49.0	49.0	55.5	57.2
	160	180		21.6	21.6	30.3	30.3	43.3	43.3	52.0	52.0	58.5	60.6
	170			22.9	22.9	32.0	32.0	45.8	45.8	54.6	54.9	61.5	64.1
	170	190		24.1	24.1	33.8	33.8	48.2	48.2	57.2	57.9	64.5	67.5
	180			25.3	25.3	35.5	35.5	50.7	50.7	59.8	60.8	67.5	70.9
	180	200		26.6	26.6	37.2	37.2	53.1	53.1	62.3	63.8	70.5	74.4
	190			27.8	27.8	38.9	38.9	55.6	55.6	64.9	66.7	73.5	77.8
	190	210		29.0	29.0	40.6	40.6	57.8	58.1	67.5	69.7	76.5	81.3
	200			30.3	30.3	42.4	42.4	60.0	60.5	70.0	72.6	79.4	84.7
	200	220		31.5	31.5	44.1	44.1	62.1	63.0	72.6	75.6	82.4	88.2
	210			32.7	32.7	45.8	45.8	64.3	65.4	75.2	78.5	85.4	91.6
	210	230		33.9	33.9	47.5	47.5	66.4	67.9	77.7	81.5	88.4	95.1
	220			35.2	35.2	49.2	49.2	68.5	70.4	80.3	84.4	91.4	98.5
	220	240		36.4	36.4	51.0	51.0	70.7	72.8	82.9	87.4	94.4	101.9
	230			37.6	37.6	52.7	52.7	72.8	75.3	85.5	90.3	97.4	105.4
	230	250		38.9	38.9	54.4	54.4	75.0	77.7	88.0	93.3	100.4	108.8
	240			40.1	40.1	56.1	56.1	77.1	80.2	90.6	96.2	103.4	112.3
	240	260		41.3	41.3	57.9	57.9	79.2	82.7	93.2	99.2	106.4	115.7
	250			42.6	42.6	59.6	59.6	81.4	85.1	95.7	102.1	109.4	119.2
	250	270		43.8	43.8	61.3	61.3	83.5	87.6	98.3	105.1	112.4	122.6
> 250			On request, please contact the HALFEN Technical Team; information can be found at the back of the catalogue.										

HALFEN HIT ISO-ELEMENT HIGH PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT

8

Building Physics,
Planning

HIT-HP DD

Load bearing capacity values according to EN 1992-1-1 (EC2)



Shear load capacity $\pm VRd$

Concrete strength: C20/25 ≥C25/30

80

Number of shear bars yy			06		07		06		07			
Rebar diameter dd			Ø6 mm				Ø8 mm					
Concrete cover [mm]	30	35	50									
Design values VRd [kN/m] for slab thickness [mm]	160–190	160–190	180–210	47.4	47.4	55.3	55.3	79.9	79.9	83.6	93.2	
	200–230	200–230	220–250	52.2	52.2	60.9	60.9	92.8	92.8	108.2	108.2	
	240–350	240–350	260–350	60.5	60.5	70.5	70.5	107.5	107.5	125.4	125.4	
Number of shear bars yy			06		07		06		07			
Rebar diameter dd			Ø10 mm				Ø12 mm					
Concrete cover [mm]	30	35	50									
	160	160	180	—	—	—	—	—	—	—		
		170		97.8^①	122.2 ^①	97.8^①	122.2 ^①	—	—	—		
		170	190	104.8^①	124.8	104.8^①	131.0 ^①	—	—	—		
		180		111.9^①	124.8	111.9^①	139.9 ^①	111.9^①	139.9 ^①	111.9^①		
		180	200	119.0^①	124.8	119.0^①	145.6	119.0^①	148.8 ^①	119.0^①		
		190		124.8	124.8	126.1^①	145.6	126.1^①	157.6 ^①	126.1^①		
		190	210	124.8	124.8	133.2^①	145.6	133.2^①	166.5 ^①	133.2^①		
		200		124.8	124.8	140.3^①	145.6	140.3^①	175.3 ^①	140.3^①		
		200	220	124.8	124.8	145.6	145.6	147.3^①	179.7	147.3^①		
		210		144.9	144.9	154.4^①	169.1	154.4^①	179.7	154.4^①		
		210	230	144.9	144.9	161.5^①	169.1	161.5^①	179.7	161.5^①		
		220		144.9	144.9	168.6^①	169.1	168.6^①	208.7	168.6^①		
		220	240	144.9	144.9	169.1	169.1	175.7^①	208.7	175.7^①		
		230		144.9	144.9	169.1	169.1	182.8^①	208.7	182.8^①		
		230	250	144.9	144.9	169.1	169.1	189.8^①	208.7	189.8^①		
		240		144.9	144.9	169.1	169.1	196.9^①	208.7	196.9^①		
		240	260	144.9	144.9	169.1	169.1	204.0^①	208.7	204.0^①		
		250		167.9	167.9	195.9	195.9	208.7	208.7	211.1^①		
		250	270	167.9	167.9	195.9	195.9	208.7	208.7	218.2^①		
	260–350	260–350	280–350	167.9	167.9	195.9	195.9	208.7	208.7	225.3^①		

① To utilize the element load capacity of the HIT Elements → see table on page 81



All required verifications have already been considered. The adjacent connecting elements must be verified by the planner.



Most of the elements are also available in 25 or 50 cm lengths. For further details on load bearing capacities please contact our technical support team → see inside back cover for contact details.

HALFEN HIT ISO-ELEMENT SUPERIOR PERFORMANCE

HIT-SP DD

Decoding the type selection: HIT-SP DD, tension/compression bars

Number of tension/compression bars xx			05		07		10		12		14	
Concrete cover [mm]	30	35	50	Concrete strength: C20/25 ≥ C25/30:								
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160			20.4	20.4	28.6	28.6	40.8	40.8	49.0	49.0	55.5
	160		180	21.6	21.6	30.3	30.3	43.3	43.3	52.0	52.0	58.5
	170		190	22.9	22.9	32.0	32.0	45.8	45.8	54.6	54.9	61.5
	170		190	24.1	24.1	33.8	33.8	48.2	48.2	57.2	57.9	64.5
			180	25.3	25.3	35.5	35.5	50.7	50.7	59.8	60.8	67.5
												70.9

Specifications

Main slab thickness: 18 cm

Concrete strength: C25/30

Concrete cover: 35 mm

Bending moment: $m_{Rd} \geq 50.7 \text{ kNm/m}$ Calculated no. of tension/compression bars (**xx**): 10

Shear load*: $v_{Rd} \geq 45.6 \text{ kNm/m}$ Calculated no. of shear load bars (**yy**): 07

Compiled type description: HIT-SP DD-1007*-18-100-35-06

*Determine the shear load bars for HIT-SP DD → see tables on page 80

Load bearing capacity values according to EN 1992-1-1 (EC2)



Moment bearing capacity $\pm m_{Rd}$

120

Number of tension/compression bars xx			05		07		10		12		14	
Concrete cover [mm]	30	35	50	Concrete strength: C20/25 ≥ C25/30:								
Design values m_{Rd} [kNm/m] for slab thickness [mm]	160			20.4	20.4	28.6	28.6	40.8	40.8	49.0	49.0	55.5
	160		180	21.6	21.6	30.3	30.3	43.3	43.3	52.0	52.0	58.5
	170		190	22.9	22.9	32.0	32.0	45.8	45.8	54.6	54.9	61.5
	170		190	24.1	24.1	33.8	33.8	48.2	48.2	57.2	57.9	64.5
	180		200	25.3	25.3	35.5	35.5	50.7	50.7	59.8	60.8	67.5
	180		200	26.6	26.6	37.2	37.2	53.1	53.1	62.3	63.8	70.5
	180		200	27.8	27.8	38.9	38.9	55.6	55.6	64.9	66.7	73.5
	190		210	29.0	29.0	40.6	40.6	57.8	58.1	67.5	69.7	76.5
	190		210	30.3	30.3	42.4	42.4	60.0	60.5	70.0	72.6	79.4
	200		220	31.5	31.5	44.1	44.1	62.1	63.0	72.6	75.6	82.4
	200		220	32.7	32.7	45.8	45.8	64.3	65.4	75.2	78.5	85.4
	210		230	33.9	33.9	47.5	47.5	66.4	67.9	77.7	81.5	88.4
	210		230	35.2	35.2	49.2	49.2	68.5	70.4	80.3	84.4	91.4
	220		240	36.4	36.4	51.0	51.0	70.7	72.8	82.9	87.4	94.4
	220		240	37.6	37.6	52.7	52.7	72.8	75.3	85.5	90.3	97.4
	230		250	38.9	38.9	54.4	54.4	75.0	77.7	88.0	93.3	100.4
	230		250	40.1	40.1	56.1	56.1	77.1	80.2	90.6	96.2	103.4
	240		260	41.3	41.3	57.9	57.9	79.2	82.7	93.2	99.2	106.4
	240		260	42.6	42.6	59.6	59.6	81.4	85.1	95.7	102.1	109.4
	250		270	43.8	43.8	61.3	61.3	83.5	87.6	98.3	105.1	112.4
> 250			On request, please contact our technical support team; contact information can be found at the back of the catalogue.									

HALFEN HIT ISO-ELEMENT SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-SP DD

Load bearing capacity values according to EN 1992-1-1 (EC2)



Shear load capacity in both directions

Concrete strength: C20/25 ≥C25/30

120

Number of shear bars yy			06		07		06		07					
Rebar diameter dd			Ø6 mm				Ø8 mm							
Concrete cover [mm]	30	35	50											
Design values V_{Rd} [kN/m] for slab thickness [mm]	160–190	160–190	180–210	39.1	39.1	45.6	45.6	65.5	65.5	76.5	76.5			
	200–210	200–210	220–230	44.9	44.9	52.4	52.4	65.5	65.5	76.5	76.5			
	220–230	220–230	240–250	44.9	44.9	52.4	52.4	79.9	79.9	93.2	93.2			
	240–350	240–350	260–350	52.2	52.2	60.9	60.9	92.8	92.8	108.2	108.2			

Number of shear bars yy			06		07		06		07					
Rebar diameter dd			Ø10 mm				Ø12 mm							
Concrete cover [mm]	30	35	50											
Design values V_{Rd} [kN/m] for slab thickness [mm]		160		–	–	–	–	–	–	–	–			
	160		180	–	–	–	–	–	–	–	–			
		170		97.8 ^①	102.5	97.8 ^①	119.6	–	–	–	–			
	170		190	102.5	102.5	104.8 ^①	119.6	–	–	–	–			
		180		102.5	102.5	111.9 ^①	119.6	111.9 ^①	139.9 ^①	111.9 ^①	139.9 ^①			
	180		200	102.5	102.5	119.0 ^①	119.6	119.0 ^①	147.6	119.0 ^①	148.8 ^①			
		190		102.5	102.5	119.6	119.6	126.1 ^①	147.6	126.1 ^①	157.6 ^①			
	190		210	102.5	102.5	119.6	119.6	133.2 ^①	147.6	133.2 ^①	166.5 ^①			
		200		102.5	102.5	119.6	119.6	140.3 ^①	147.6	140.3 ^①	172.2			
	200		220	102.5	102.5	119.6	119.6	147.3 ^①	147.6	147.3 ^①	172.2			
		210		102.5	102.5	119.6	119.6	147.6	147.6	154.4 ^①	172.2			
	210		230	102.5	102.5	119.6	119.6	147.6	147.6	161.5 ^①	172.2			
		220		124.8	124.8	145.6	145.6	168.6 ^①	179.7	168.6 ^①	209.6			
	220		240	124.8	124.8	145.6	145.6	175.7 ^①	179.7	175.7 ^①	209.6			
		230		124.8	124.8	145.6	145.6	179.7	179.7	182.8 ^①	209.6			
	230		250	124.8	124.8	145.6	145.6	179.7	179.7	189.8 ^①	209.6			
		240		124.8	124.8	145.6	145.6	179.7	179.7	196.9 ^①	209.6			
	240		260	124.8	124.8	145.6	145.6	179.7	179.7	204.0 ^①	209.6			
	250–350	250–350	270–350	144.9	144.9	169.1	169.1	179.7	179.7	209.6	209.6			

① To utilize the element load capacity of the HIT Elements → see table on page 81



All required verifications have already been considered. The adjacent connecting elements must be verified by the planner.



Most of the elements are also available in 25 or 50 cm lengths. For further details on load bearing capacities please contact our technical support team → see inside back cover for contact details.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP DD, HIT-SP DD

Shear load capacity as maximal load capacity based on steel load capacity



Maximal load capacity $\pm V_{Rd}$

80

Number of shear bars yy			06	07	06	07
Rebar diameter dd			Ø10 mm		Ø12 mm	
Concrete cover [mm]	30	35	50			
Design values V _{Rd,Element} [kN/m] for slab thickness [mm]	160	160	180	-	-	-
	170	170	190	124.8	145.6	-
	180	180	200	124.8	145.6	179.7
	190	190	210	124.8	145.6	179.7
	200	200	220	124.8	145.6	179.7
	210	210	230	144.9	169.1	179.7
	220	220	240	144.9	169.1	208.7
	230	230	250	144.9	169.1	208.7
	240	240	260	144.9	169.1	208.7
	250–350	250–350	270–350	167.9	195.9	208.7



Maximal load capacity $\pm V_{Rd}$

120

Number of shear bars yy			06	07	06	07
Rebar diameter dd			Ø10 mm		Ø12 mm	
Concrete cover [mm]	30	35	50			
Design values V _{Rd,Element} [kN/m] for slab thickness [mm]	160	160	180	-	-	-
	170	170	190	102.5	119.6	-
	180	180	200	102.5	119.6	147.6
	190	190	210	102.5	119.6	147.6
	200	200	220	102.5	119.6	147.6
	210	210	230	102.5	119.6	147.6
	220	220	240	124.8	145.6	179.7
	230	230	250	124.8	145.6	179.7
	240	240	260	124.8	145.6	179.7
	250–350	250–350	270–350	144.9	169.1	179.7



Verifications for main slab load capacity (under consideration of concrete compression strut verification) are included in the load bearing capacity tables on pages 77–80. With some elements the maximum load bearing capacities of the steel load capacity of the ele-

ments can be utilized if a higher concrete strength is selected or other geometrical boundary conditions are present.

The concrete compression strut must be verified by the planner separately.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT


8

Building Physics,
Planning

HIT-HP DD, HIT-SP DD


Product description – Cross sections (typical applications)

HIT-HP DD – High Performance

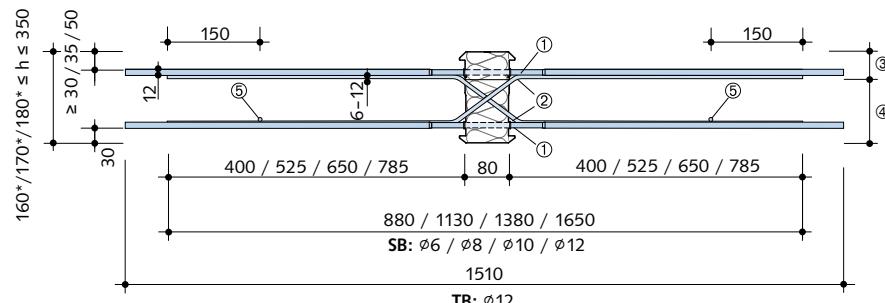

Dimensions in [mm]

HIT-SP DD – Superior Performance

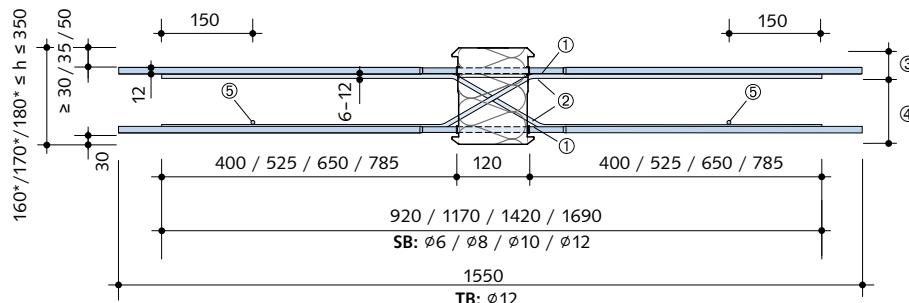

Dimensions in [mm]

On-site reinforcement: Diameter and stirrup spacing is dependent on V_{Ed} [kN/m]

Stirrup spacing s / bar diameter [mm]	Ø6	Ø8	Ø10
s ≤ 25 cm	49.9 kN/m	87.5 kN/m	137.0 kN/m
s ≤ 20 cm	61.5 kN/m	109.0 kN/m	171.0 kN/m
s ≤ 15 cm	82.0 kN/m	146.0 kN/m	228.0 kN/m
s ≤ 10 cm	123.0 kN/m	219.0 kN/m	342.0 kN/m

- ① Tension-/compression bars (Ø 12 mm)
- ② Shear bars (Ø 6 mm, Ø 8 mm, Ø 10 mm, Ø 12 mm)
- ③ Tension bar box (TB-Box)
- ④ Shear bar box
- ⑤ Installation bar, (structural) (Ø 6 mm)

* smallest available element height, depending on shear bar diameter: see table "Possible slab thickness h" (page 76)



Application examples

Single axis tensioned main slab

For balcony slabs incorporated within a main slab, (continuous main slab) e.g. a loggia. The insulated connection transfers positive moments, negative moments and shear forces.

Centrally supported cantilevered balcony


With variable load situations (see $q_{Ed,1}$ and $q_{Ed,2}$) positive and negative moments and shear forces in the balcony connection are to be expected.

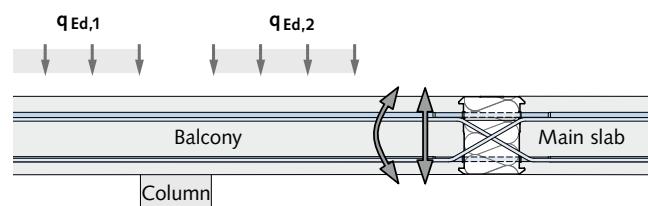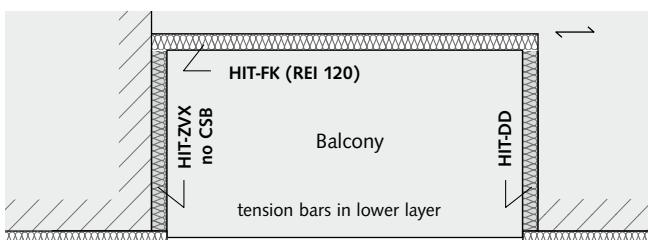

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP DD, HIT-SP DD

Installation diagram

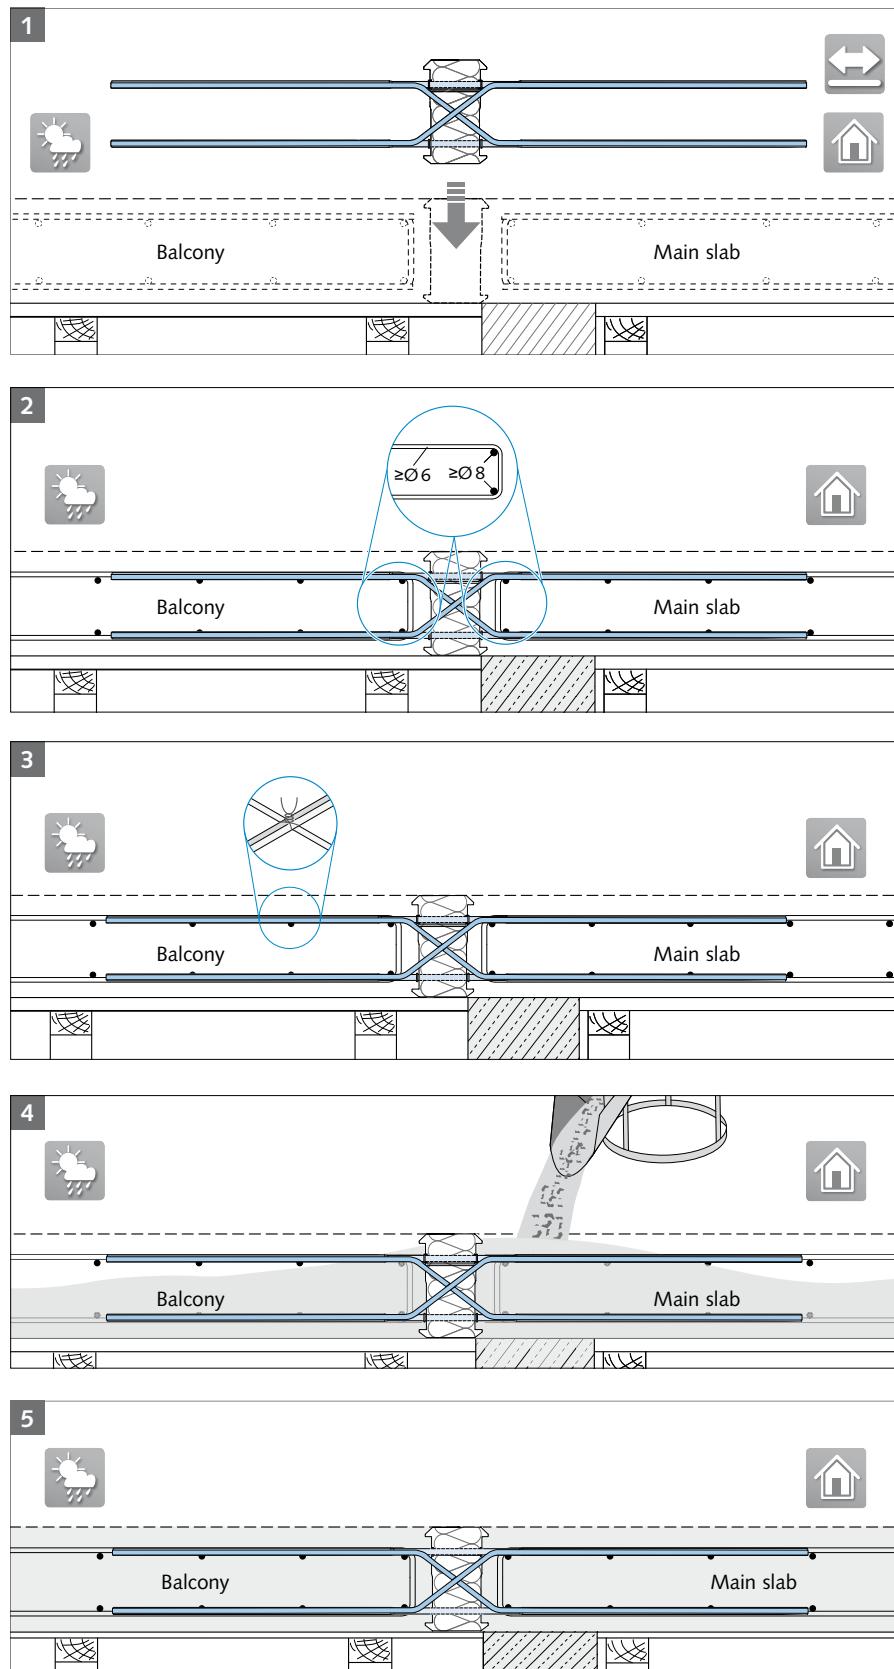


1 Positioning the HIT Element from above

i The HIT-DD Element is symmetrical; therefore both installation directions are correct

2 Installing on-site reinforcement

! The on-site reinforcement must be placed as specified by the structural engineer

3 Fixing the tension bars and the shear bars to on-site reinforcement using tying wire

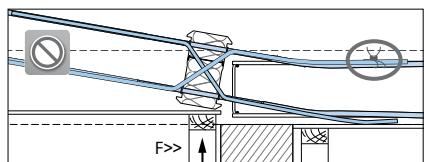

! Ensure the formwork is at the correct height!

4 Pour the concrete

! To ensure the HIT Elements are securely installed, pour and compact the concrete evenly. Ensure all HIT Elements are securely fixed.

5 Freshly concreted balcony slab on supporting structure

i For further installation instructions please visit www.halfen.com.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

5

- Symmetrical additional elements with 80 mm and 120 mm insulation thickness
- Transfer of planned horizontal forces parallel and/or perpendicular to the insulation plane

2

MVX-OU/OD



3

ZVX/ZDX

4

DD

5

HT / EQ

6


AT / FT / OTX / FK

7


ST / WT

8


Building Physics,
Planning

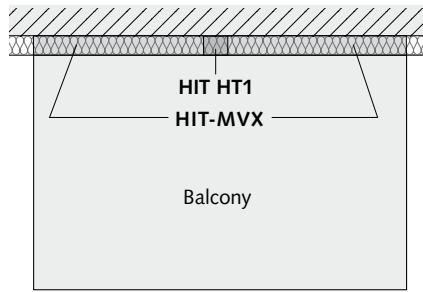

Application: Cantilevered balcony

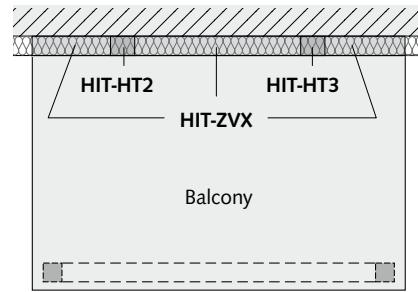

Application: Simply supported balcony
on columns

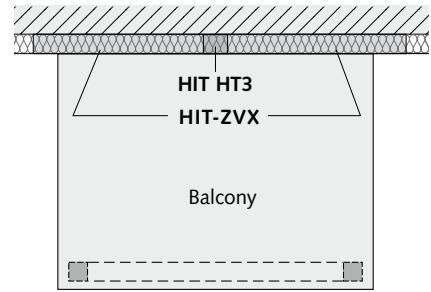

Application: Simply supported balcony
on columns

HIT-HP HT – High Performance with 80 mm insulation thickness

HIT-SP HT – Superior Performance with 120 mm insulation thickness


Content	Type	Page
Product variations / load bearing capacities	HIT-HP HT1, HIT-SP HT1	85
Product variations / load bearing capacities	HIT-HP HT2, HIT-SP HT2	86
Product variations / load bearing capacities	HIT-HP HT3, HIT-SP HT3	87
Positioning / joint spacings	HIT-HP HT, HIT-SP HT	88

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP HT1, HIT-SP HT1

Ordering example

HIT-HP	HT1 - hh	- 010
HIT-SP	HT1 - hh	- 015
⋮	⋮	⋮
①	②	③
④	⑤	⋮

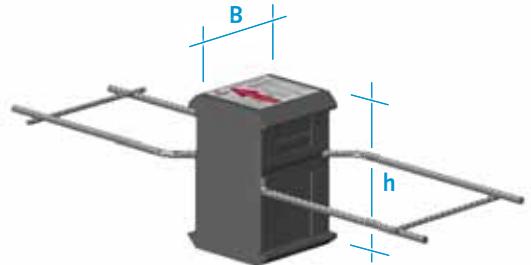

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height [cm]
- ⑤ Element width [cm]


Load bearing capacities and dimensions




Horizontal forces parallel to the insulation plane

HIT-HP/SP HT1 Components		Design values					
Reinforcement		Element width B	C20/25		C25/30		
Shear bars	Tension-/compression bars	HIT-HP HIT-SP [mm]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]	
2 × Ø8	—	100 150	+9.9	0	±11.5	0	


Vertical section HP/SP HT1

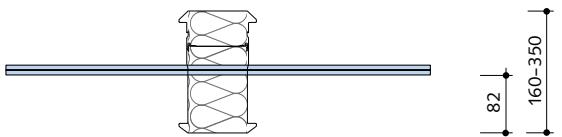

Top view HIT-HP HT1

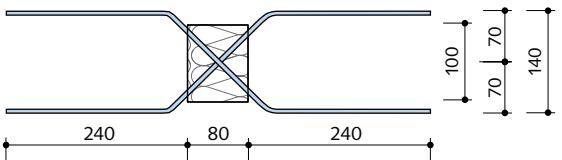

Top view HIT-SP HT1

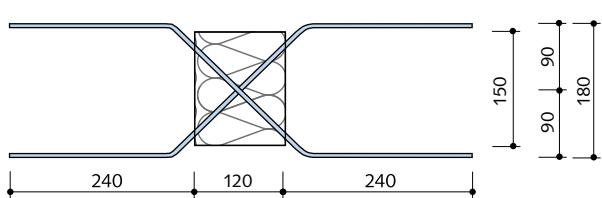

Dimensions in [mm]

HIT Type	HP	SP
Insulation thickness [mm]	80	120
Element width B [cm]	10	15
Possible HIT Element height h [cm]	16 – 35	


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR

HIT-HP HT2, HIT-SP HT2

Ordering example

HIT-HP	HT2	- hh	- 010
HIT-SP	HT2	- hh	- 015
⋮	⋮	⋮	⋮
①	②	③	④
⑤			

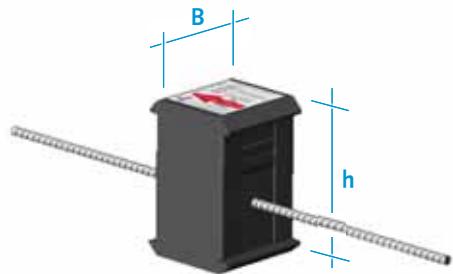

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height [cm]
- ⑤ Element width [cm]


Load bearing capacities and dimensions




Horizontal forces perpendicular to the insulation plane

HIT-HP/SP HT2 Components			Design values			
Reinforcement		Element width B	C20/25		C25/30	
Shear bars	Tension-/compression bars	HIT-HP HIT-SP [mm] 100 150	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]
—	1 × Ø10	100 150	0	±18.2	0	±21.2


Vertical section HP/SP HT2

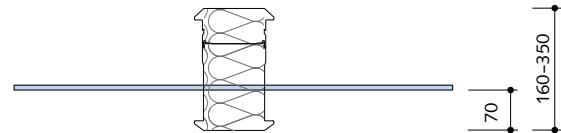

Top view HIT-HP HT2

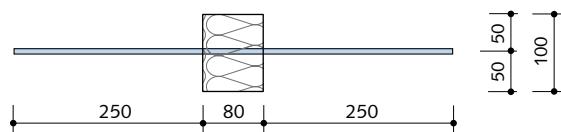

Top view HIT-SP HT2

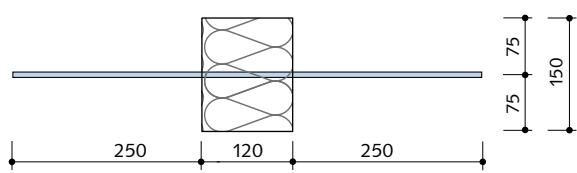

Dimensions in [mm]

HIT Type	HP	SP
Insulation thickness [mm]	80	120
Element width B [cm]	10	15
Possible slab thickness h [cm]	16 - 35	

2 MVX/OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT


8 Building Physics,
Planning

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP HT3, HIT-SP HT3

Ordering example

HIT-HP	HT3	- hh	- 010
HIT-SP	HT3	- hh	- 015
⋮	⋮	⋮	⋮
①	②	③	④
⑤			

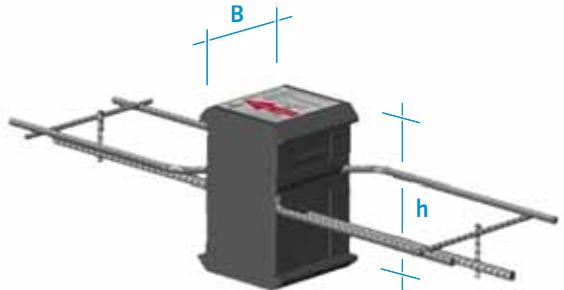

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height [cm]
- ⑤ Element width [cm]

Load bearing capacities and dimensions




Horizontal forces parallel und perpendicular to the insulation plane


HIT-HP/SP HT3 Components		Design values					
Reinforcement		Element width B	C20/25		C25/30		
Shear bars	Tension-/compression bars	HIT-HP HIT-SP [mm] 100 150	$H_{Rd} \parallel$ [kN/ element]	$H_{Rd} \perp$ [kN/ element]	$H_{Rd} \parallel$ [kN/ element]	$H_{Rd} \perp$ [kN/ element]	
2 x $\varnothing 8$	1 x $\varnothing 10$		± 9.9	± 18.2	± 11.5	± 21.2	

i Further values for load bearing capacity can be found on page 89 in the HIT-EQ section.


Vertical section HP/SP HT3

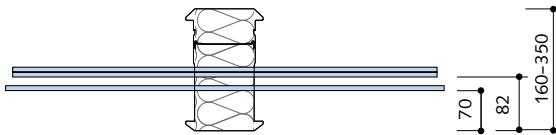

Top view HIT-HP HT3

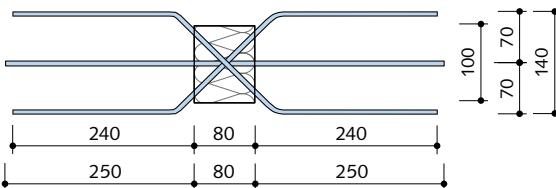

Top view HIT-SP HT3

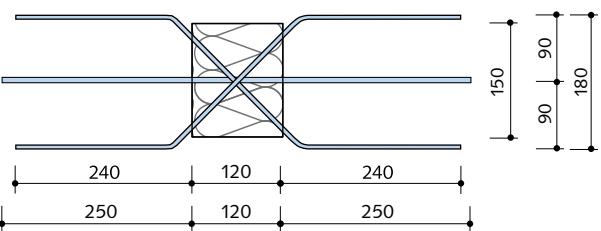

Dimensions in [mm]

HIT Type	HP	SP
Insulation thickness [mm]	80	120
Element width B [cm]	10	15
Possible slab thickness h [cm]	16 - 35	

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning


HIT-HP HT, HIT-SP HT

Position of the HIT-HT units in the cross-section of a wall in combination with HIT Insulated connections




HALFEN HIT-HT Elements complement the HIT Product range and are used in combination with HIT Insulated connections.

Single-leaf masonry with balcony at main slab level


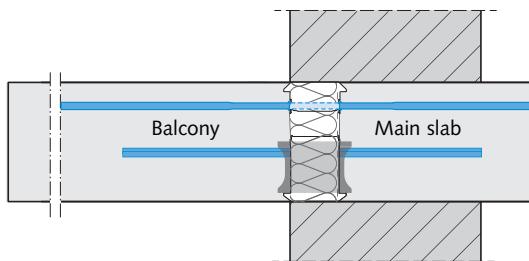


Double-leaf masonry with balcony at main slab level

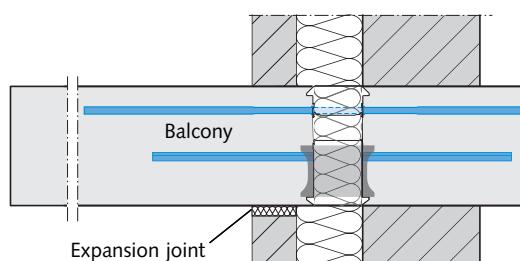

HIT-HP/SP HT1
in combination with
HIT-HP/SP MVX

HIT-HP/SP HT2
in combination with
HIT-HP/SP ZVX
or
HIT-HP/SP ZDX

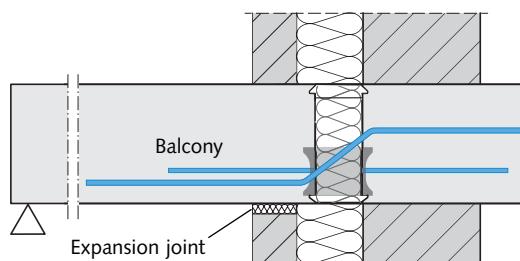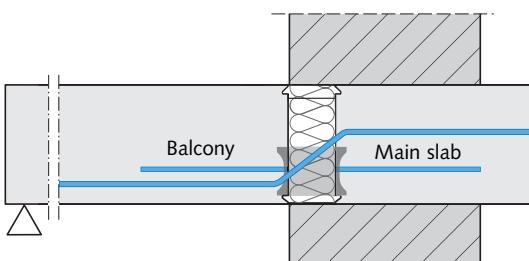


Refer to the installation instructions for installation methods, download at www.halfen.com.

Joint spacings

Expansion joints must be planned in external concrete components (balcony slabs) at a right angle to the insulation line of the HIT Elements to account for temperature fluctuation.

The joint spacing in straight, cantilevered balcony slabs must not exceed the maximum allowable expansion joint spacing of 11.3 m.


In balcony construction using HIT-HP/SP HT1 and HT3 elements the maximum spacing of HIT-HT elements must be limited to 11.3/2 m = 5.65 m.

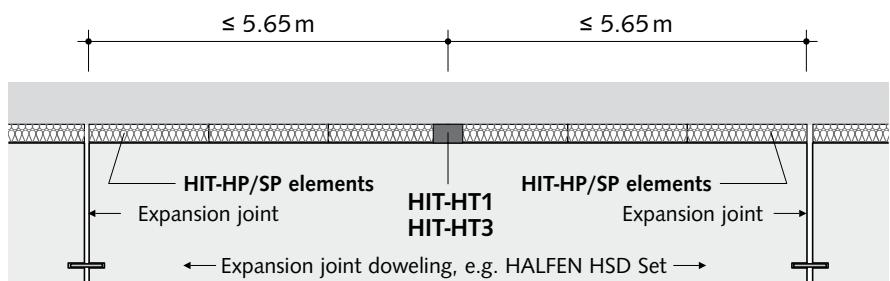


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP EQ, HIT-SP EQ

- Symmetrical complementary elements with insulation thickness 80 mm or 120 mm for earthquake-zone application
- Transfer of planned horizontal forces parallel or perpendicular to the insulation plane
- Transfer of lifting moments

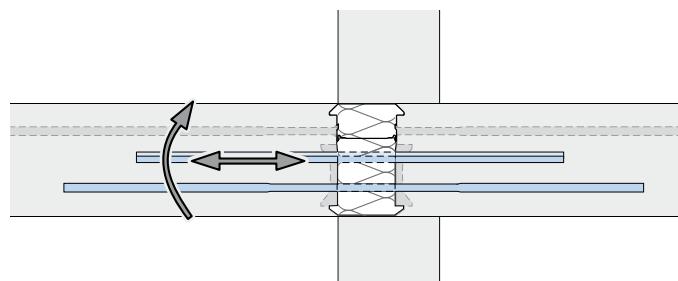

HIT-HP EQ – High Performance with 80 mm insulation thickness
HIT-SP EQ – Superior Performance with 120 mm insulation thickness

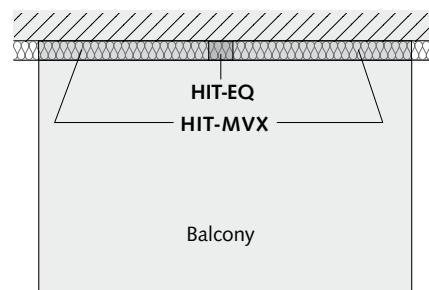

Application: Cantilevered balcony

Content	Type	Page
Product variations / load bearing capacities	HIT-HP EQ1, HIT-SP EQ1	90
Product variations / load bearing capacities	HIT-HP EQ2, HIT-SP EQ2	91
Positioning / joint spacings	HIT-HP EQ1/EQ2, HIT-SP EQ1/EQ2	92


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR

HIT-HP EQ, HIT-SP EQ

Ordering example

HIT-HP	EQ1	- hh	- 010
HIT-SP	EQ1	- hh	- 015
⋮	⋮	⋮	⋮
①	②	③	④
⑤			

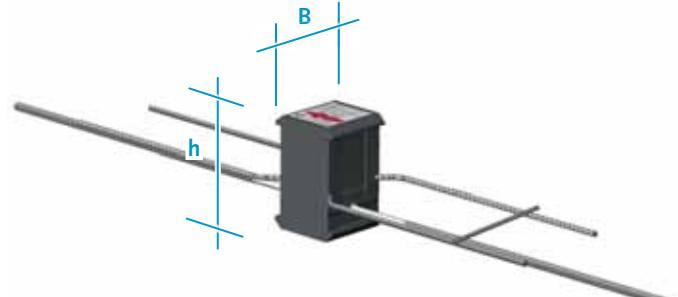

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height [cm]
- ⑤ Element width [cm]

2 MVX-OU/OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT

8 Building Physics,
Planning

Load bearing capacities and dimensions



Horizontal forces parallel and perpendicular to the insulation plane


HIT-HP/SP EQ1 Components			Design values			
Reinforcement		Element width B	C20/25		C25/30	
Shear bars	Tension / compression bars	HIT-HP HIT-SP [mm]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]
2 × Ø8	1 × Ø12	100 150	±15.5	±43.7	±15.5	±49.2




M_{Rd} → page 93

Load bearing capacity values for lifting moments are on page 93 of this catalogue.


Vertical section HP/SP EQ1

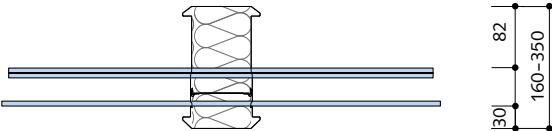

Top view HIT-HP EQ1

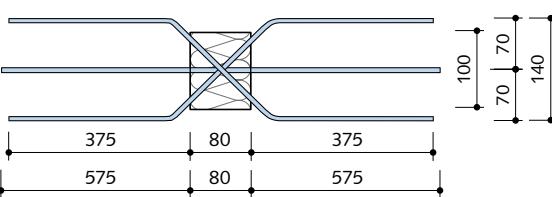

Top view HIT-SP EQ1

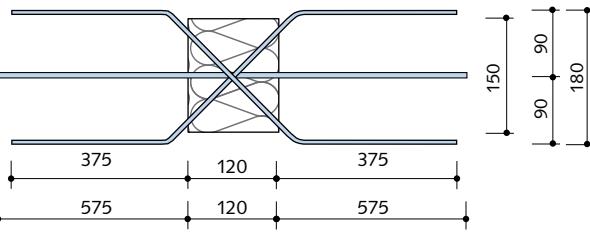

Dimensions in [mm]

HIT Type	HP	SP
Insulation thickness [mm]	80	120
Element width B [cm]	10	15
Possible slab thickness h [cm]	16 – 35	


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP EQ, HIT-SP EQ

Ordering example

HIT-HP	EQ2	- hh	- 010
HIT-SP	EQ2	- hh	- 015
⋮	⋮	⋮	⋮

① ② ③ ④ ⑤

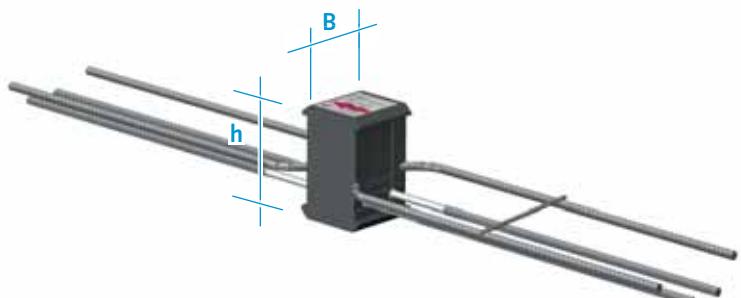

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height [cm]
- ⑤ Element width [cm]

Load bearing capacities and dimensions



Horizontal forces parallel and perpendicular to the insulation plane


HIT-HP/SP MZ-EQ2 Components			Design values					
Reinforcement		Element width B	C20/25		C25/30			
Shear bars	Tension-/compression bars	HIT-HP HIT-SP [mm]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]	$H_{Rd} \parallel$ [kN/element]	$H_{Rd} \perp$ [kN/element]		
2 × Ø12	2 × Ø12	100 150	±34.6	±86.6	±34.8	±98.4		




$M_{Rd} \rightarrow$ page 93

Load bearing capacity values for lifting moments are on page 93 of this catalogue.


Vertical section HP/SP EQ2

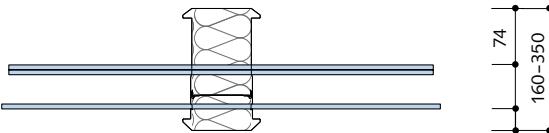

Top view HIT-HP EQ2

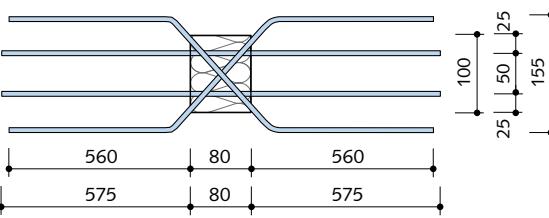

Top view HIT-SP EQ2

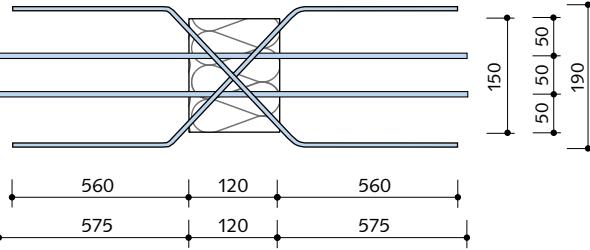

Dimensions in [mm]

HIT Type	HP	SP
Insulation thickness [mm]	80	120
Element width B [cm]	10	15
Possible slab thickness h [cm]	16 – 35	

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning


HIT-HP EQ, HIT-SP EQ

Position of the combined HIT-EQ elements in the cross-section of a wall




HALFEN HIT-EQ Elements complement the HIT Product range and are only to be used in combination with HIT Balcony connection elements of types HIT-MVX.

Monolithic masonry with balcony at main slab level

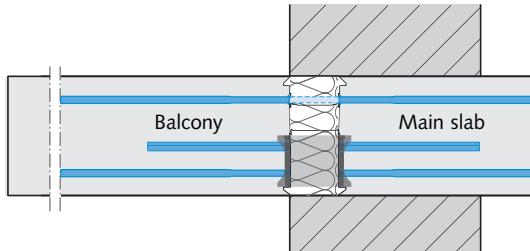

Double-leaf masonry with balcony at main slab level

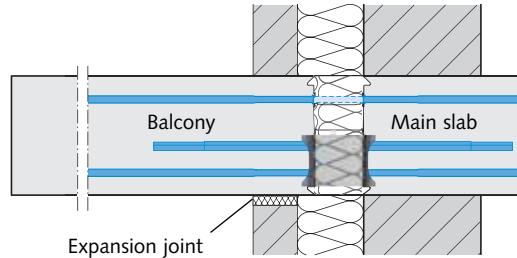


Joint spacings

Expansion joints must be provided to limit the effect of temperature fluctuation in the external concrete components at a right angle to the insulation line of the HIT Elements.

In straight, cantilevered balcony slabs the distance between joints must not exceed the maximum expansion joint spacing of 11.3 m.

Balcony slabs designed with HIT-HP/HIT-SP EQ1 and EQ2 elements must have a maximum edge to edge spacing of $11.3/2 = 5.65$ m.

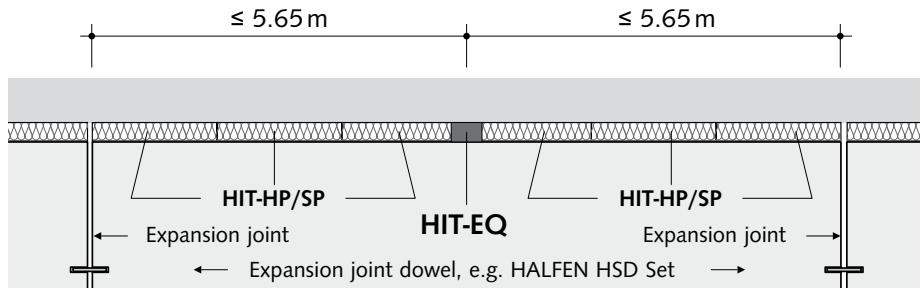

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP EQ, HIT-SP EQ

Load bearing capacity values according to EN 1992-1-1 (EC2)



Lifting moment

Concrete strength: C20/25 ≥C25/30



Type	HIT-HP EQ			EQ1	EQ2	
	HIT-SP EQ					
Concrete cover [mm]	30	35	50			
Design values M _{Rd} [kNm/element] for slab thickness [mm]		160		3.8	4.2	7.5
	160		180	4.0	4.5	8.0
		170		4.2	4.7	8.4
	170		190	4.4	5.0	8.8
		180		4.6	5.2	9.3
	180		200	4.8	5.5	9.7
		190		5.1	5.7	10.1
	190		210	5.3	6.0	10.6
		200		5.5	6.2	11.0
	200		220	5.7	6.4	11.5
		210		5.9	6.7	11.9
	210		230	6.2	6.9	12.3
		220		6.4	7.2	12.8
	220		240	6.6	7.4	13.2
		230		6.8	7.7	13.6
	230		250	7.0	7.9	14.1
		240		7.2	8.2	14.5
	240			7.5	8.4	15.0
		250		7.7	8.7	15.4
	250			7.9	8.9	15.8
> 250			Available on request. See back of catalogue for contact information.			



Lifting moment +M_{Rd} only in combination with HIT-MVX elements

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

4

5

6

7

ST / WT


8

Building Physics,
Planning


HIT-FT, HIT-OT, HIT-AT

6

- Insulated connections to form a thermal barrier between the main slab and a parapet or a corbelled parapet
- Transfer of normal forces as well as positive and negative shear forces and bending moments



Application: Floor slab with parapet



Application: Floor slab with high parapet or corbelled parapet

HIT-HP AT - High Performance with 80 mm insulation thickness

HIT-SP AT - Superior Performance with 120 mm insulation thickness

Content	Type	Page
Product variations / Load range	HIT-HP AT, HIT-SP AT	95
Product description	HIT-HP AT, HIT-SP AT	96
Calculation tables / Load bearing capacity values	HIT-HP AT, HIT-SP AT	98
Design example	HIT-HP AT, HIT-SP AT	100
On-site reinforcement	HIT-HP AT, HIT-SP AT	101

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP AT, HIT-SP AT

Product types – Load range

Possible combinations of shear bars and tension/compression loops are shown in the table below; includes using both HP and SP types of HIT Elements.

Possible combinations of structural elements		Number of tension/compression loops Ø8 mm	
Element width B = 25 cm		2	3
Number of shear bars Ø6 in both directions	1	●	●
	2	●	●
Type		AT1	AT2
Applicable parapet heights H (without joint)		≥ 22 cm	≥ 30 cm

● = HP and SP

Ordering example


HIT-HP AT 2 - 0302 - 16 - 025
 HIT-SP AT 1 - 0201 - 25 - 025

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Number of tension/compression loops per side
- ⑤ Number of shear bars
- ⑥ Element height h [cm]
- ⑦ Element width B [cm]



Possible parapet width

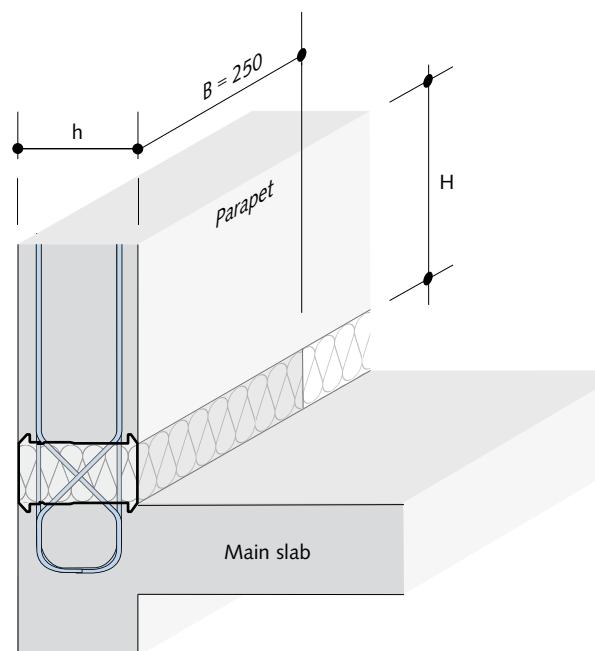


The illustration shows an application where the parapet width is identical to the height h of the HIT-AT Element.


Possible slab thickness h [cm]	16 – 35*
Slab height	≥ 160 mm
*Load bearing capacity values for slab heights > 25 cm available on request	

Product description – Cross sections and Top views


Cross section: HIT-HP AT1

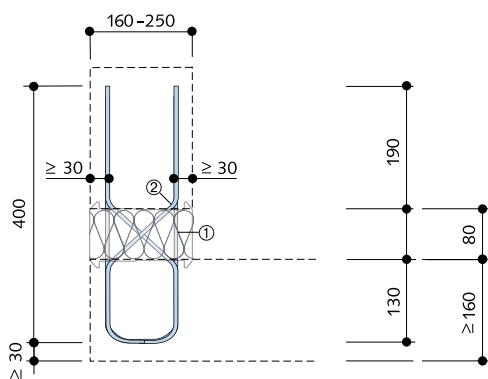


HIT-HP AT2

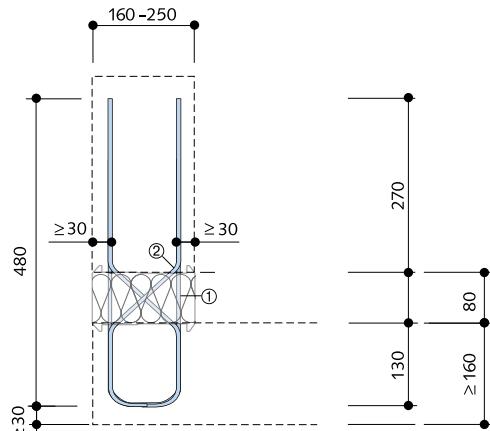


Cross section: HIT-SP AT1

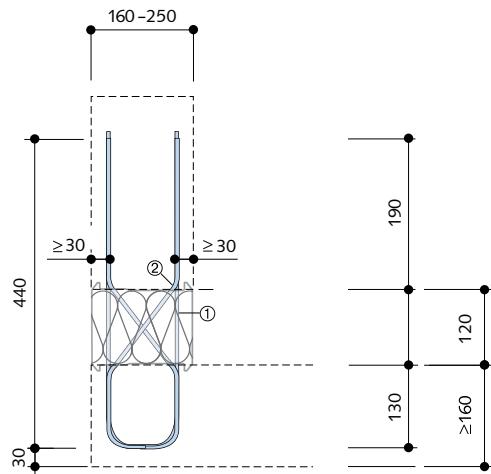

HIT-SP AT2

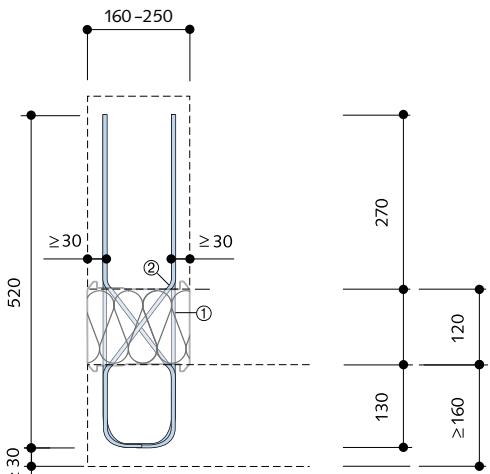


Top view: HIT-HP/SP AT1 – bar spacings

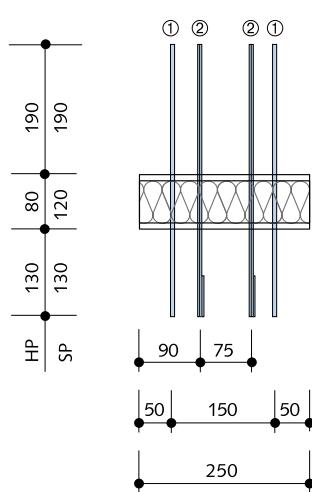

- ① Tension/compression loops:
Ø8 mm, B500B NR
- ② Shear bars:
Ø6 mm, B500B NR

HIT-HP/SP AT2 - bar spacings

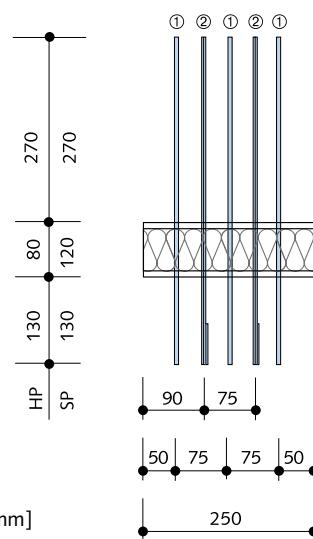


- ① Tension/compression loops:
Ø8 mm, B500B NR
- ② Shear bars:
Ø6 mm, B500B NR

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


HIT-HP AT, HIT-SP AT

Structural system

Sign convention for calculation

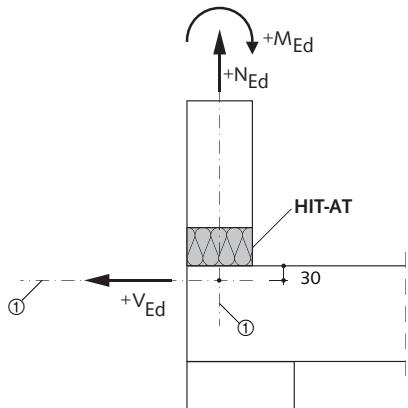

① Design section

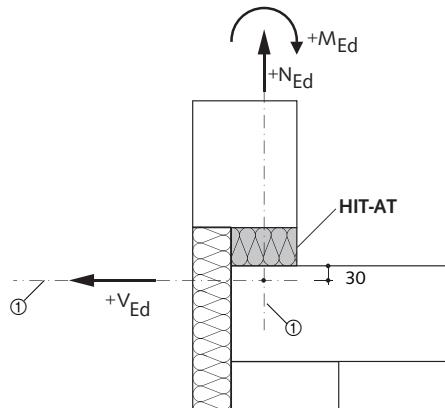


① Design section

Dimensions in [mm]

Top view:

Roof slab with connected parapet

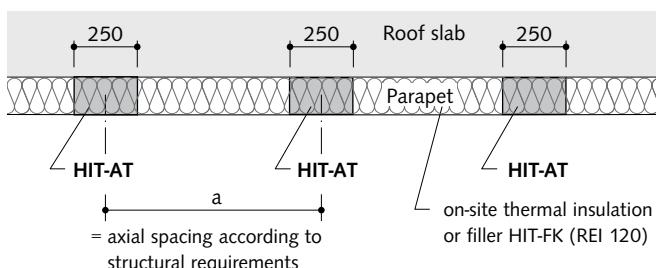

Determining the axial spacing a

Calculation of the maximum element spacing of the HIT-AT units is dependent on the effect of moment $\pm m_{Ed}$ [kNm/m], the normal force n_{Ed} [kN/m] and the shear load $\pm v_{Ed}$ [kN/m]

→ see table
(page 98–99)



- ▶ Step 1: Determine the relationship (ratio) of the acting loads $|n_{Ed}/m_{Ed}|$ [1/m]
- ▶ Step 2: With $|n_{Ed}/m_{Ed}|$; select N_{Rd} from the “Calculation tables” depending on the element height h and the HIT-AT product type (AT1 or AT2). Intermediate values may be linearly interpolated.
- ▶ Step 3: Select the value for V_{Rd} in the table “Load bearing capacity values” for the respective HIT-AT variant depending on the element height h , of the selected product type, HIT-AT1 or HIT-AT2, and the shear load.
- ▶ Step 4: Calculate the element spacing a .

$$a_{max,1} = N_{Rd}/n_{Ed}$$

$$a_{max,2} = V_{Rd}/V_{Ed}$$

$$a = \min(a_{max,1}; a_{max,2})$$
- ▶ Step 5: Check the calculated load bearing capacities (per element).

$$n_{Ed} \cdot a = N_{Ed} \leq N_{Rd}$$

$$m_{Ed} \cdot a = M_{Ed} \leq M_{Rd}$$

$$v_{Ed} \cdot a = V_{Ed} \leq V_{Rd}$$



1

MVX /-COR

2

MVX-OU/OD

3

ZVX / ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP AT

Calculation tables



Calculation tables

HIT-HP AT1	Element height h [mm]			
	160–170	180–190	200–210	220–250
n _{Ed} /m _{Ed} [1/m]	N _{Rd} [kN/element]			
0	– 0.0	– 0.0	– 0.0	– 0.0
2	– 4.5	– 5.4	– 6.3	– 7.0
4	– 8.3	– 9.8	–11.1	–12.1
6	–11.4	–13.3	–15.0	–16.0
8	–14.2	–16.3	–18.2	–19.1
10	–16.5	–18.8	–20.9	–21.5
12	–18.5	–21.0	–23.2	–23.6
20	–24.7	–27.3	–29.5	–29.2
30	–29.5	–32.1	–34.3	–33.1
40	–32.8	–35.3	–37.2	–35.5
50	–35.1	–37.4	–39.3	–37.1
60	–36.8	–39.0	–40.8	–38.2

Concrete strength: Parapet $\geq C25/30$
Main slab $\geq C20/25$



HIT-HP AT2	Element height h [mm]			
	160–170	180–190	200–210	220–250
n _{Ed} /m _{Ed} [1/m]	N _{Rd} [kN/element]			
0	– 0.0	– 0.0	– 0.0	– 0.0
2	– 9.6	–11.5	–13.3	–14.8
4	–17.5	–20.7	–23.6	–25.6
6	–24.3	–28.2	–31.9	–33.8
8	–30.0	–34.5	–38.6	–40.4
10	–35.0	–39.9	–44.3	–45.7
12	–39.3	–44.5	–49.1	–50.0



Load bearing capacities for slab thicknesses > 25 cm are available on request.
See inside back cover for contact information.

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in both directions

HIT-HP AT1	V _{Rd} [kN/element] for element height h [mm]			
	160–170	180–190	200–210	220–250
HIT-HP AT1-0201-hh-025	± 6.2	± 6.8	± 7.9	
HIT-HP AT1-0202-hh-025	±12.4	±13.6	±15.8	

Concrete strength: Parapet $\geq C25/30$
Main slab $\geq C20/25$



M_{Rd} is dependent on N_{Rd}

HIT-HP AT1	M _{Rd} [kNm/element] for element height h [mm]			
	N _{Rd} [kN/element]	160–170	180–190	200–210
0	±2.5	±3.0	±3.6	±4.1
- 5	±2.2	±2.7	±3.2	±3.7
- 10	±2.0	±2.4	±2.9	±3.2
- 15	±1.7	±2.1	±2.5	±2.8
- 20	±1.5	±1.8	±2.2	±2.3
- 25	±1.2	±1.5	±1.8	±1.8
- 30	±1.0	±1.2	±1.4	±1.4

HIT-HP AT2	M _{Rd} [kNm/element] for element height h [mm]			
	N _{Rd} [kN/element]	160–170	180–190	200–210
0	±5.3	±6.4	±7.6	±8.7
- 5	±5.0	±6.1	±7.2	±8.3
- 10	±4.8	±5.8	±6.9	±7.8
- 15	±4.5	±5.5	±6.5	±7.4
- 20	±4.3	±5.2	±6.2	±6.9
- 25	±4.0	±4.9	±5.8	±6.4
- 30	±3.7	±4.6	±5.4	±6.0

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP AT

Calculation tables



Calculation tables

HIT-SP AT1	Element height h [mm]				
	160–170	180–190	200–210	220–250	
n _{Ed} /m _{Ed} [1/m]	N _{Rd} [kN/element]				
0	– 0.0	– 0.0	– 0.0	– 0.0	
2	– 3.6	– 4.3	– 5.0	– 5.6	
4	– 6.6	– 7.8	– 8.9	– 9.7	
6	– 9.2	– 10.7	– 12.0	– 12.8	
8	– 11.3	– 13.0	– 14.6	– 15.2	
10	– 13.2	– 15.1	– 16.7	– 17.2	
12	– 14.8	– 16.8	– 18.5	– 18.9	
20	– 19.7	– 21.9	– 23.6	– 23.3	
30	– 23.6	– 25.7	– 27.4	– 26.5	
40	– 26.2	– 28.2	– 29.8	– 28.4	
50	– 28.1	– 29.9	– 31.4	– 29.7	
60	– 29.4	– 31.2	– 32.6	– 30.6	

Concrete strength: Parapet ≥C25/30
Main slab ≥C20/25

120

HIT-SP AT2	Element height h [mm]				
	160–170	180–190	200–210	220–250	
n _{Ed} /m _{Ed} [1/m]	N _{Rd} [kN/element]				
0	– 0.0	– 0.0	– 0.0	– 0.0	
2	– 8.0	– 9.6	– 11.1	– 12.4	
4	– 14.7	– 17.3	– 19.8	– 21.5	
6	– 20.3	– 23.7	– 26.7	– 28.4	
8	– 25.2	– 29.0	– 32.4	– 33.9	
10	– 29.3	– 33.5	– 37.1	– 38.3	
12	– 33.0	– 37.3	– 41.2	– 42.0	



Load bearing capacities for slab thicknesses
> 25 cm are available on request.
See inside back cover for contact information.

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in both directions

HIT-SP AT1	V _{Rd} [kN/element] for element height h [mm]			
	160–170	180–190	200–210	220–250
HIT-SP AT1-0201-hh-025	± 5.1	± 5.9	± 6.8	
HIT-SP AT1-0202-hh-025	±10.2	±11.7	±13.6	

Concrete strength: Parapet ≥C25/30
Main slab ≥C20/25

120



M_{Rd} is dependent on N_{Rd}

HIT-SP AT1	M _{Rd} [kNm/element] for element height h [mm]				
	N _{Rd} [kN/element]	160–170	180–190	200–210	220–250
0	±2.0	±2.4	±2.9	±3.3	
- 5	±1.7	±2.1	±2.5	±2.8	
- 10	±1.5	±1.8	±2.1	±2.4	
- 15	±1.2	±1.5	±1.8	±1.9	
- 20	±1.0	±1.2	±1.4	±1.5	
- 25	±0.7	±0.9	±1.1	±1.0	
- 30	±0.5	±0.6	±0.7	±0.6	

HIT-SP AT2	M _{Rd} [kNm/element] for element height h [mm]				
	N _{Rd} [kN/element]	160–170	180–190	200–210	220–250
0	±4.4	±5.4	±6.4	±7.3	
- 5	±4.2	±5.1	±6.0	±6.9	
- 10	±3.9	±4.8	±5.6	±6.4	
- 15	±3.7	±4.5	±5.3	±5.9	
- 20	±3.4	±4.2	±4.9	±5.5	
- 25	±3.2	±3.9	±4.6	±5.0	
- 30	±2.9	±3.6	±4.2	±4.6	

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-HP AT, HIT-SP AT

Design example

Planned: Joint width 12 cm
HIT-SP AT2

Required: Axial spacing a [m] of the elements (see page 97)

Assumed: $H = 1.40\text{ m}$
 $b_A = h = 0.20\text{ m}$
 $h_l = 0.12\text{ m}$

Determining the loads

$$g_d = H \cdot b_A \cdot \rho_{\text{concrete}} \cdot \gamma_G$$

$$g_d = 1.40\text{ m} \cdot 0.20\text{ m} \cdot 25\text{ kN/m}^3 \cdot 1.35 = 9.45\text{ kN/m}$$


Assumption: $w_k = \text{wind pressure} + \text{wind suction} = 2.6\text{ kN/m}^2$
(To simplify calculation the parapet height is assumed to be the same on both sides; wind load / left = wind load / right)

$$w_d = w_k \cdot (H + h_l + 0.03) \cdot \gamma_Q$$

$$w_d = 2.6\text{ kN/m}^2 \cdot 1.55\text{ m} \cdot 1.5 = 6.05\text{ kN/m}$$

$$k = (0.03\text{ m} + h_l + H) \cdot 0.5$$

$$k = (0.03\text{ m} + 0.12\text{ m} + 1.40\text{ m}) \cdot 0.5 = 0.78\text{ m}$$

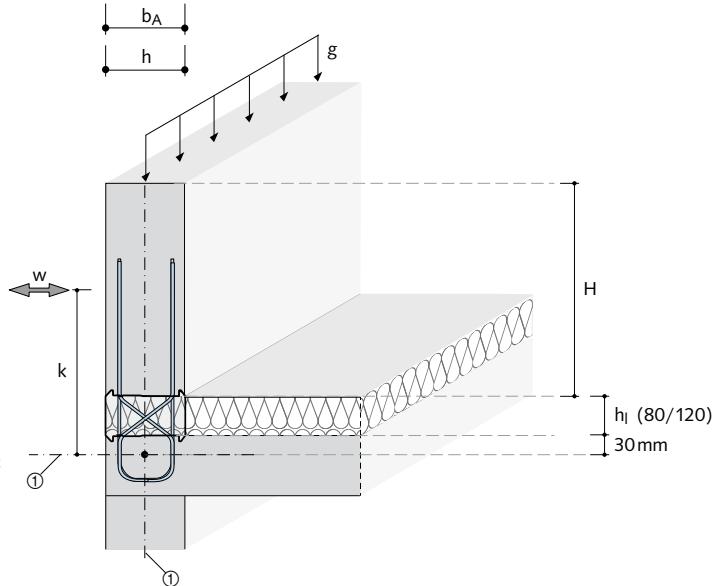

① Design section

Determining the axial spacing

$$n_{Ed} = -9.45\text{ kN/m}$$

$$m_{Ed} = 6.05\text{ kN/m} \cdot 0.78\text{ m} = 4.72\text{ kNm/m}$$

$$v_{Ed} = -6.05\text{ kN/m}$$

i Method / sign convention:
see → page 97

Step 1: $|n_{Ed}/m_{Ed}| = |-9.45/4.72| = 2.00 [1/m]$



Step 2: $N_{Rd} = -11.1\text{ kN/element}$

Step 3: $V_{Rd} = \pm 7.5\text{ kN/element}$ (for HIT-SP AT2-0301-20-025)



Step 4: $a_{max1} = -11.1/-9.45 = 1.17\text{ m}$

$$a_{max2} = -7.5/-6.05 = 1.23\text{ m}$$

$$\Rightarrow a = 1.17\text{ m}$$

Step 5: $N_{Ed} = -9.45 \cdot 1.17 = -11.06\text{ kN/element}$



$$M_{Ed} = 4.72 \cdot 1.17 = 5.52\text{ kNm/element} < M_{Rd} = 5.54\text{ kNm/element}$$

$$V_{Ed} = -6.05 \cdot 1.17 = -7.08\text{ kN/element} < V_{Rd} = -7.5\text{ kN/element}$$




⇒ HIT-SP AT2-0301-20-025 with a maximum spacing of 1.17 m.


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP AT, HIT-SP AT

On-site reinforcement HIT-AT

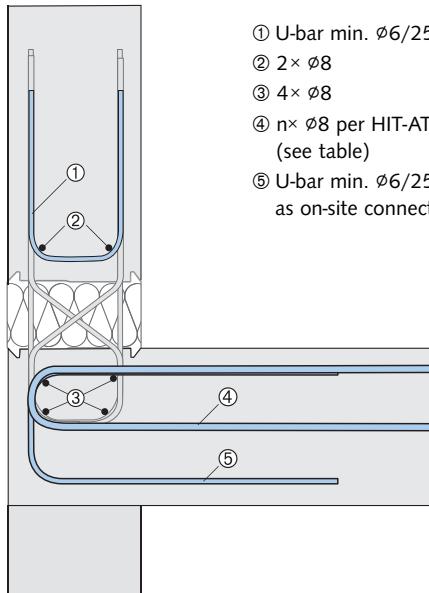

- ① U-bar min. Ø6/25 cm
- ② 2 × Ø8
- ③ 4 × Ø8
- ④ n × Ø8 per HIT-AT Element
(see table)
- ⑤ U-bar min. Ø6/25 cm
as on-site connecting reinforcement

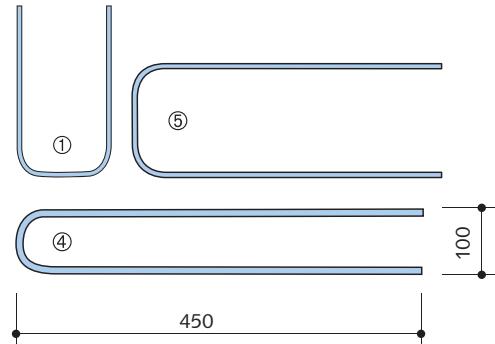


HIT-HP AT	Number n connecting bars ④
HIT-HP AT1	3
HIT-HP AT2	4
HIT-SP AT	Number n connecting bars ④
HIT-SP AT1	3
HIT-SP AT2	3

Edge distances



Edge distance

The HIT-AT Element can be installed flush with the concrete edge at the end of the parapet. The minimal distance from the side edge of the main concrete slab to the HIT-AT is 55 mm.

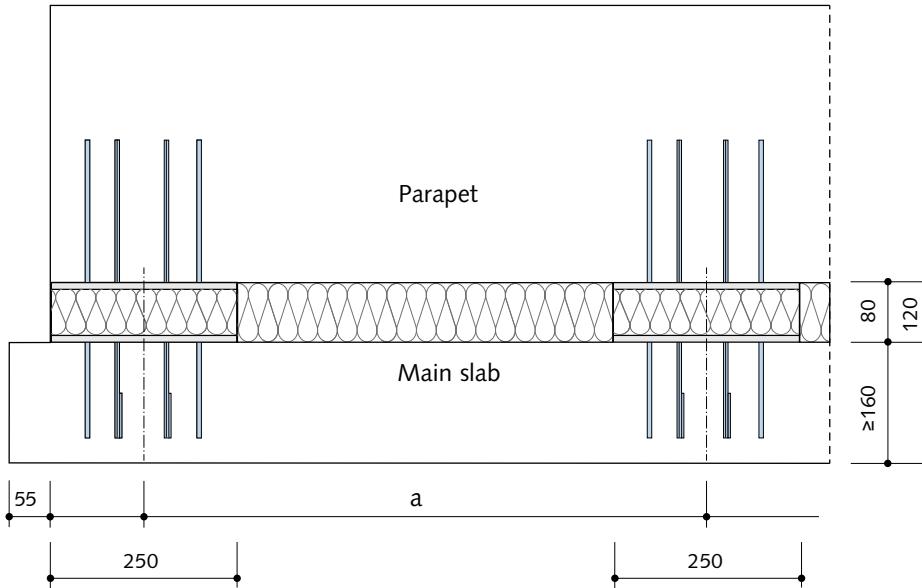

An installation diagram can be found on our website; www.halfen.com.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

4

5

6


7

8


Building Physics,
Planning

HIT-HP FT, HIT-SP FT

- Thermal insulated connections for application between the main slab and corbelled parapet
- Transfer of normal forces as well as shear forces and bending moments



Cross section:
Floor slab with corbelled parapet
and thermal insulating masonry



Cross section:
Floor slab with corbelled parapet
and external thermal insulation composite system

HIT-HP FT – **High Performance** with 80 mm insulation thickness

HIT-SP FT – **Superior Performance** with 120 mm insulation thickness

Content	Type	Page
Product variations / Load range	HIT-HP FT, HIT-SP FT	103
Product description	HIT-HP FT, HIT-SP FT	104
Calculation tables / Load bearing capacity values	HIT-HP FT, HIT-SP FT	106
On-site reinforcement	HIT-HP FT, HIT-SP FT	108


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP FT, HIT-SP FT


Product types – Load range

Listed in the table below are possible combinations of shear bars and tension/compression loops; this includes HIT Elements type HP and SP.

HIT-FT1: Possible combinations of structural elements		
Element width B = 25 cm		Number of tension/compression loops ø8
		2
Number of shear bars ø6 in one direction	2	●
	3	●
● = HP and SP		

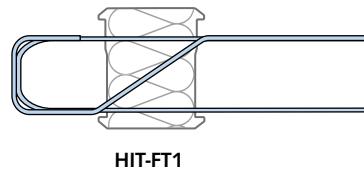


HIT-FT2: Possible combinations of structural elements		
Element width B = 25 cm		Number of tension/compression loops ø8
		2
Number of shear bars ø6 in both directions	2	●
	3	●
● = HP and SP		

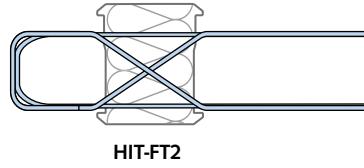

Ordering example

HIT-HP	FT1	-	0202	-	16	-	025
HIT-SP	FT2	-	0203	-	25	-	025
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
①	②	③	④	⑤	⑥	⑦	

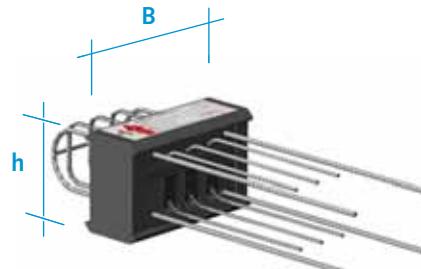

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Number of tension/compression loops
- ⑤ Number of shear bars per side
- ⑥ Element height h [cm]
- ⑦ Element width B [cm]

Corbelled parapets, available widths

Possible slab thickness h [cm]	16 - 35*
Corbelled parapets, width [cm]	≥ 15

*Load bearing capacities for slab thicknesses > 25 cm available on request

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE


1 MVX/-COR

HIT-HP FT, HIT-SP FT


Product description – Cross sections and top views

Cross section:

HIT-HP FT1

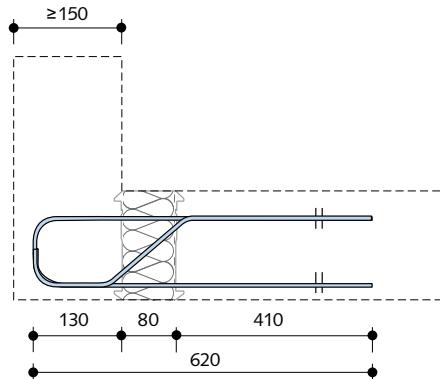


HIT-HP FT2

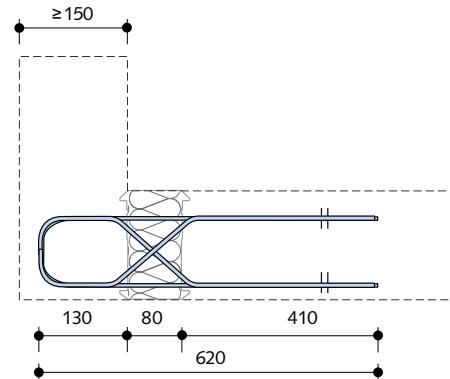


Cross section:

HIT-SP FT1

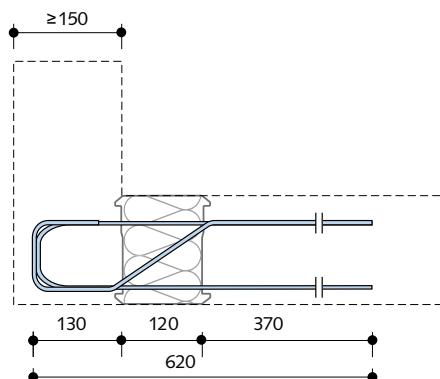

HIT-SP FT2

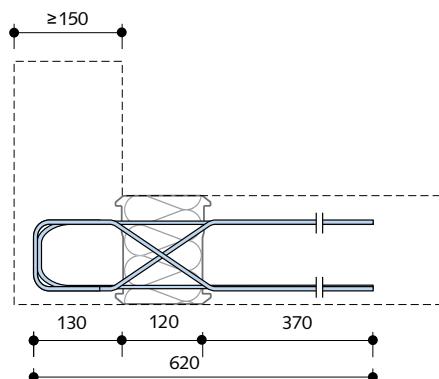


Top view:

HIT-HP/SP FT1 – Bar spacings


HIT-HP/SP FT2 – Bar spacings

- 2 Shear bars

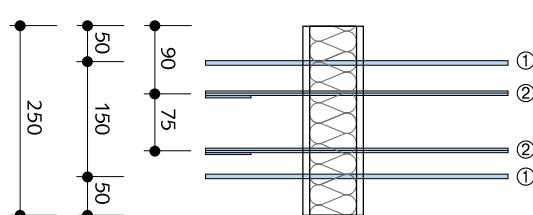

Dimensions in [mm]

- 3 Shear bars

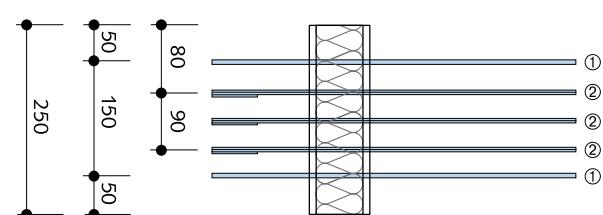

① Tension/compression loops: Ø8 mm, B500B NR

② Shear bars: Ø6 mm, B500B NR,
with type HIT-FT1 only in one direction

2 MVX-OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT


8 Building Physics,
Planning

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP FT, HIT-SP FT

Structural system


Sign convention for calculation

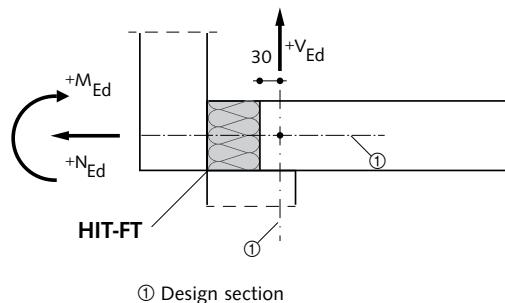

Dimensions in [mm]

Top view:

Main slab with attached corbelled parapet

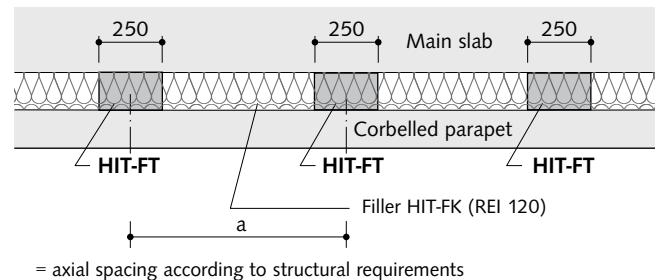

Determining of axial spacing a

Calculation of the maximum element spacing of the HIT-FT units is dependent on the effect of moment $\pm m_{Ed}$ [kNm/m], the normal force n_{Ed} [kN/m] and the shear load $\pm v_{Ed}$ [kN/m]

→ see table
(page 106f.)



- ▶ **Step 1:** Determine the relationship (ratio) of the acting loads $n_{Ed}/|m_{Ed}|$ [1/m]
- ▶ **Step 2:** With $n_{Ed}/|m_{Ed}|$ select N_{Rd} from the “**Calculation tables**”, depending on the element height h and the HIT-AT product type (HIT-FT1 or HIT-FT2). Intermediate values may be linearly interpolated.
- ▶ **Step 3:** Select the value for V_{Rd} in the table “**Load bearing capacity values**” for the respective HIT-AT variant depending on the element height h , the concrete strength class and the shear load in the main slab.
- ▶ **Step 4:** Calculate the element spacing a

$$a_{max,1} = N_{Rd}/n_{Ed} \quad [m]$$

$$a_{max,2} = V_{Rd}/v_{Ed} \quad [m]$$

$$a = \min(a_{max,1}; a_{max,2})$$
- ▶ **Step 5:** Check the calculated load bearing capacities (per element).

(optional) $n_{Ed} \cdot a = N_{Ed} \leq N_{Rd}$

$$m_{Ed} \cdot a = M_{Ed} \leq M_{Rd}$$

$$v_{Ed} \cdot a = V_{Ed} \leq V_{Rd}$$



HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

1 MVX/-COR

2

3 MVX-OU/OD

4 DD

5

HT / EQ

6

7 ST / WT

8

Building Physics,
Planning

Calculation tables



Calculation tables

n _{Ed} / m _{Ed} [1/m]	+N _{Rd} * [kN/element]			
	Element height h [mm]			
+50	56.6	60.4	63.4	59.9
+40	52.9	56.9	60.1	57.3
+30	47.7	51.9	55.3	53.4
+20	39.8	44.1	47.7	47.1
+12	29.9	33.9	37.4	38.1
+10	26.6	30.4	33.7	34.8
+8	22.8	26.3	29.4	30.8
+6	18.5	21.5	24.3	25.8
+4	13.4	15.7	18.0	19.5
+2	7.3	8.7	10.1	11.2
0	0.0	0.0	0.0	0.0



Load bearing capacities for slab thicknesses > 25 cm are available on request.
See inside back cover for contact information.

Concrete strength parapet: $\geq C25/30$
Concrete strength, main slab: $\geq C20/25$

80

n _{Ed} / m _{Ed} [1/m]	-N _{Rd} * [kN/element]			
	Element height h [mm]			
-2	-6.4	-7.6	-8.8	-9.8
-4	-11.7	-13.8	-15.7	-17.1
-6	-16.2	-18.8	-21.2	-22.6
-8	-20.0	-23.0	-25.8	-26.9
-10	-23.3	-26.6	-29.5	-30.4
-12	-26.2	-29.7	-32.7	-33.4
-20	-34.8	-38.6	-41.7	-41.2
-30	-41.7	-45.4	-48.4	-46.8
-40	-46.3	-49.8	-52.6	-50.1
-50	-49.6	-52.9	-55.5	-52.4



* Sign convention → see page 105

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

HIT-HP FT1	V _{Rd} [kN/element] for element height h [mm]		
	160–190	200–210	220–250
HIT-HP FT1-0202-hh-025	-13.6	-15.8	-15.0 -17.4 -17.4 -20.1
HIT-HP FT1-0203-hh-025	-20.4	-20.4	-22.5 -26.1 -26.0 -26.0



M_{Rd} is dependent on N_{Rd}

HIT-HP FT1 HIT-HP FT2	M _{Rd} [kNm/element] for element height h [mm]				
	+N _{Rd} * [kN/element]	160–170	180–190	200–210	220–250
70	± 0.5	± 0.6	± 0.8	± 0.3	
60	± 1.0	± 1.2	± 1.5	± 1.2	
50	± 1.5	± 1.8	± 2.2	± 2.1	
40	± 2.0	± 2.5	± 2.9	± 3.0	
30	± 2.5	± 3.1	± 3.6	± 3.9	
25	± 2.7	± 3.4	± 4.0	± 4.4	
20	± 3.0	± 3.7	± 4.3	± 4.8	
15	± 3.3	± 4.0	± 4.7	± 5.3	
10	± 3.5	± 4.3	± 5.1	± 5.7	
5	± 3.7	± 4.5	± 5.4	± 6.1	



V_{Rd} in both directions parapet: $\geq C25/30$
main slab: $C20/25 \geq C25/30$

80

HIT-HP FT2	V _{Rd} [kN/element] for element height h [mm]		
	160–190	200–210	220–250
HIT-HP FT2-0202-hh-025	± 13.6	± 15.8	$\pm 15.0 \pm 17.4 \pm 17.4 \pm 20.1$
HIT-HP FT2-0203-hh-025	± 20.4	± 20.4	$\pm 22.5 \pm 26.1 \pm 26.0 \pm 26.0$

Concrete strength parapet: $\geq C25/30$
Concrete strength, main slab: $\geq C20/25$

HIT-HP FT1 HIT-HP FT2	M _{Rd} [kNm/element] for element height h [mm]				
	-N _{Rd} * [kN/element]	160–170	180–190	200–210	220–250
0		± 3.5	± 4.3	± 5.0	± 5.8
-5		± 3.3	± 4.0	± 4.7	± 5.4
-10		± 3.0	± 3.7	± 4.3	± 4.9
-15		± 2.8	± 3.4	± 4.0	± 4.4
-20		± 2.5	± 3.1	± 3.6	± 4.0
-25		± 2.2	± 2.8	± 3.3	± 3.5
-30		± 2.0	± 2.5	± 2.9	± 3.1
-35		± 1.7	± 2.1	± 2.6	± 2.6
-40		± 1.5	± 1.8	± 2.2	± 2.2
-45		± 1.2	± 1.5	± 1.9	± 1.7
-50		± 1.0	± 1.2	± 1.5	± 1.3

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-SP FT

Calculation tables



Calculation tables

HIT-SP FT1 HIT-SP FT2	+N _{Rd} * [kN/element]			
	Element height h [mm]			
n _{Ed} / m _{Ed} [1/m]	160–170	180–190	200–210	220–250
+50	56.6	60.4	63.4	59.9
+40	52.9	56.9	60.1	57.3
+30	47.7	51.9	55.3	53.4
+20	39.8	44.1	47.7	47.1
+12	29.9	33.9	37.4	38.1
+10	26.6	30.4	33.7	34.8
+8	22.8	26.3	29.4	30.8
+6	18.5	21.5	24.3	25.8
+4	13.4	15.7	18.0	19.5
+2	6.4	8.0	9.6	11.1
0	0.0	0.0	0.0	0.0



Load bearing capacities for slab thicknesses > 25 cm are available on request.

See inside back cover for contact information.

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

HIT-SP FT1	V _{Rd} [kN/element] for element height h [mm]		
	160–190	200–210	220–250
HIT-SP FT1-0202-hh-025	-11.2	-13.0	-12.9 -15.0 -15.0 -17.4
HIT-SP FT1-0203-hh-025	-16.8	-19.5	-19.3 -22.5 -22.5 -26.1



M_{Rd} is dependent on N_{Rd}

HIT-SP FT1 HIT-SP FT2	M _{Rd} [kNm/element] for element height h [mm]			
	+N _{Rd} * [kN/element]	160–170	180–190	200–210
70	±0.5	±0.6	±0.8	±0.3
60	±1.0	±1.2	±1.5	±1.2
50	±1.5	±1.8	±2.2	±2.1
40	±2.0	±2.5	±2.9	±3.0
30	±2.5	±3.1	±3.6	±3.9
25	±2.7	±3.4	±4.0	±4.4
20	±3.0	±3.7	±4.3	±4.8
15	±3.3	±4.0	±4.7	±5.3
10	±3.4	±4.1	±4.8	±5.5
5	±3.2	±3.8	±4.5	±5.2

Concrete strength parapet: ≥C25/30
Concrete strength, main slab: ≥C20/25

120

HIT-SP FT1 HIT-SP FT2	-N _{Rd} * [kN/element]			
	Element height h [mm]			
n _{Ed} / m _{Ed} [1/m]	160–170	180–190	200–210	220–250
-2	-5.4	-6.4	-7.4	-8.3
-4	-9.8	-11.6	-13.2	-14.3
-6	-13.6	-15.8	-17.8	-18.9
-8	-16.8	-19.3	-21.6	-22.6
-10	-19.5	-22.3	-24.8	-25.5
-12	-22.0	-24.9	-27.4	-28.0
-20	-29.2	-32.4	-35.0	-34.6
-30	-35.0	-38.1	-40.6	-39.2
-40	-38.8	-41.8	-44.1	-42.0
-50	-41.6	-44.4	-46.5	-43.9



* Sign convention → see page 105



V_{Rd} in both directions parapet: ≥C25/30
main slab: C20/25 ≥C25/30

120

HIT-SP FT2	V _{Rd} [kN/element] for element height h [mm]		
	160–190	200–210	220–250
HIT-SP FT2-0202-hh-025	±11.2	±13.0	±12.9 ±15.0 ±15.0 ±17.4
HIT-SP FT2-0203-hh-025	±16.8	±19.5	±19.3 ±22.5 ±22.5 ±26.1

Concrete strength parapet: ≥C25/30
Concrete strength, main slab: ≥C20/25

HIT-SP FT1 HIT-SP FT2	M _{Rd} [kNm/element] for element height h [mm]			
	-N _{Rd} * [kN/element]	160–170	180–190	200–210
0	±3.0	±3.6	±4.2	±4.9
-5	±2.7	±3.3	±3.9	±4.4
-10	±2.4	±3.0	±3.5	±4.0
-15	±2.2	±2.7	±3.2	±3.5
-20	±1.9	±2.4	±2.8	±3.1
-25	±1.7	±2.1	±2.5	±2.6
-30	±1.4	±1.8	±2.1	±2.1
-35	±1.2	±1.5	±1.7	±1.7
-40	±0.9	±1.2	±1.4	±1.2
-45	±0.7	±0.8	±1.0	±0.8
-50	±0.4	±0.5	±0.7	±0.3

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7


ST / WT

8


Building Physics,
Planning

HIT-HP FT, HIT-SP FT

On-site reinforcement HIT-FT

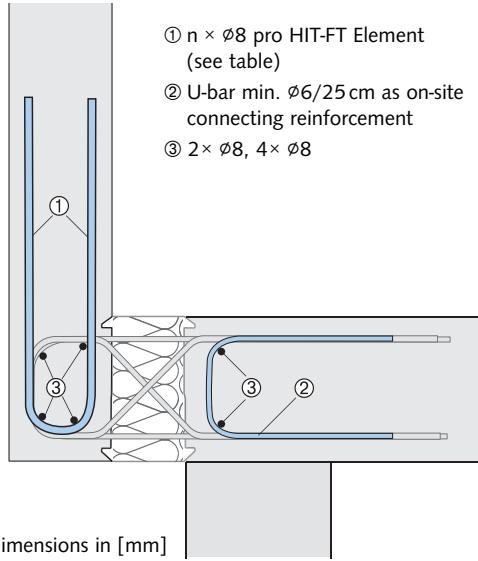

- ① n × Ø8 pro HIT-FT Element
(see table)
- ② U-bar min. Ø6/25 cm as on-site connecting reinforcement
- ③ 2× Ø8, 4× Ø8

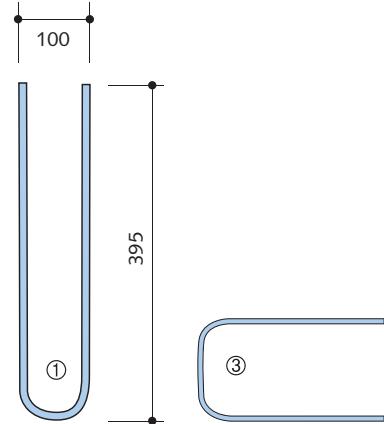


HIT Type	Number of shear bars	Number n connecting bars ①
HIT-HP FT1	2	3
HIT-HP FT2	3	4
HIT-SP FT1	2	3
HIT-SP FT2	3	4

Edge distances



Edge distances

The HIT-FT Element can be installed flush with the concrete edge at the end of the parapet. The minimal distance from the side edge of the main concrete slab to the HIT-FT is 55 mm.


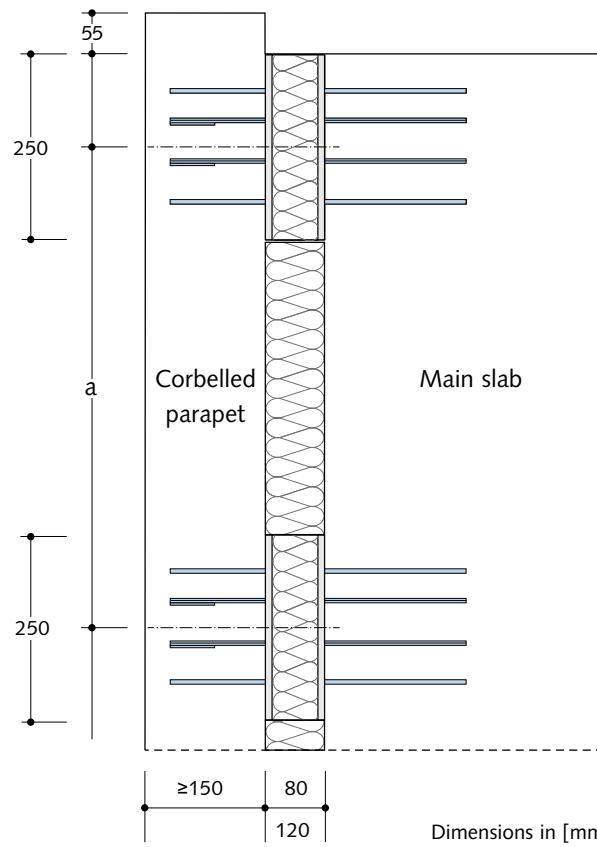


An installation diagram can be found on our website www.halfen.com.


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MV-OTX, HIT-SP MV-OTX

- Thermal insulated connections for application between the main slab and a corbel
- Transfer of normal forces and also of shear forces

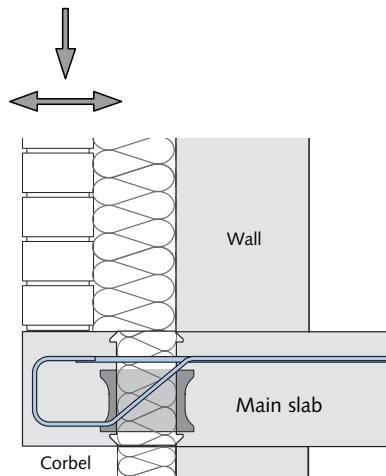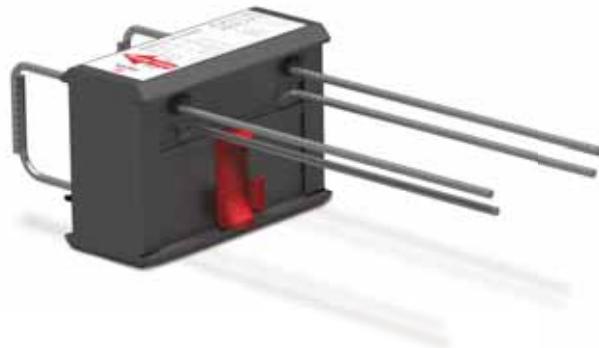

Application: Floor slab supporting a brickwork façade

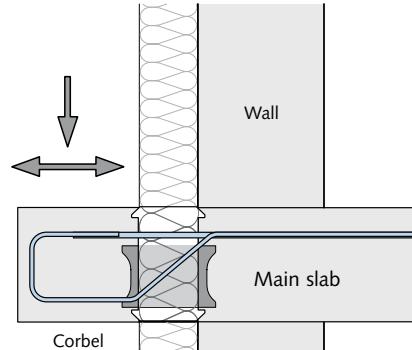

Application: Floor slab with a continuous fascia/corbel

HIT-HP OTX – High Performance with 80 mm insulation thickness

HIT-SP OTX – Superior Performance with 120 mm insulation thickness

Content	Type	Page
Product variations / Load range	HIT-HP OTX, HIT-SP OTX	110
Product description	HIT-HP OTX, HIT-SP OTX	111
Load bearing capacity values	HIT-HP OTX, HIT-SP OTX	112
On-site reinforcement	HIT-HP OTX, HIT-SP OTX	115
Determining axial spacing	HIT-HP OTX, HIT-SP OTX	116

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR

HIT-HP MV-OTX, HIT-SP MV-OTX

Product variations – Load range

The following table lists possible combinations of shear bars and tension bars.

All elements have a double-symmetric CSB.


Possible combinations of structural elements

Element width B = 25 cm		Number of tension bars Ø8	
Number of shear bars Ø6	2	2	2
Number of shear bars Ø8	2	●	●
Type	OTX1		OTX2
● = HP and SP			

Ordering example

HIT-HP OTX1 - 02 02 - 18 - 025 - 06
 HIT-SP OTX2 - 02 02 - 25 - 025 - 08


↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

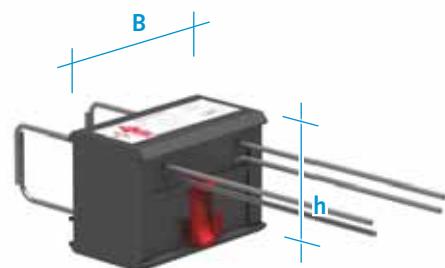

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Number of tension/compression bars
- ⑤ Number of shear bars
- ⑥ Element height h [cm]
- ⑦ Element width B [cm]
- ⑧ Diameter shear bars [mm]

Possible slab thickness h

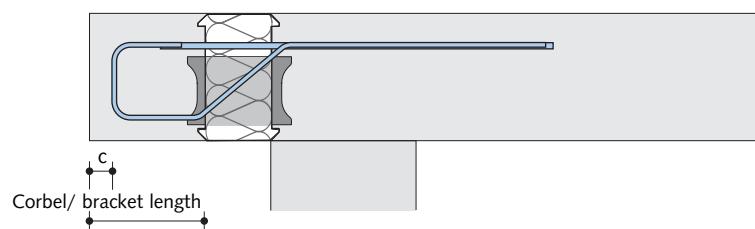

Concrete cover [mm] top and bottom	30
Possible slab thickness h [cm]	18 – 35*
Corbel/ bracket length [mm] HIT-OTX1	≥ 155 mm (c=30 mm concrete cover at front edge)
Corbel/ bracket length [mm] HIT-OTX2	≥ 195 mm (c=30 mm concrete cover at front edge)

* load bearing capacities for main slab heights > 25 cm available on request

2 MVX-OU/OD

3 ZVX/ZDX

4 DD

5 HT / EQ

6 AT / FT / OTX / FK

7 ST / WT

8 Building Physics,
Planning


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP MV-OTX, HIT-SP MV-OTX


Product description – Sectional views

Cross section:

HIT-HP OTX1

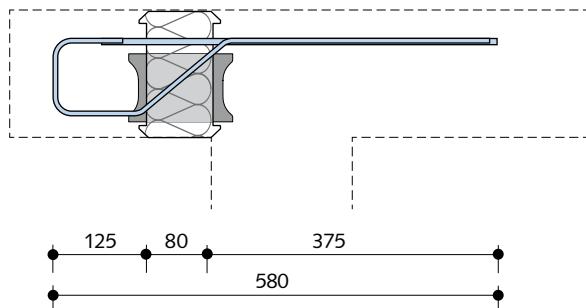


HIT-HP OTX2

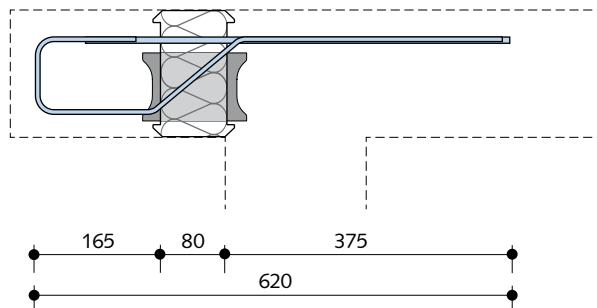


Cross section:

HIT-SP OTX1

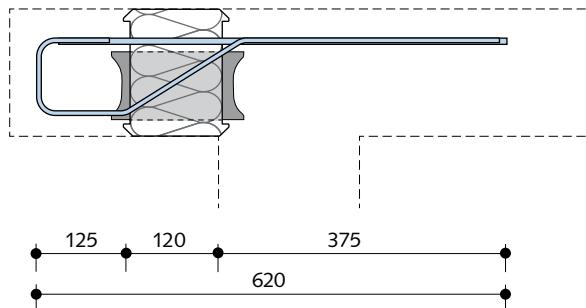


HIT-SP OTX2

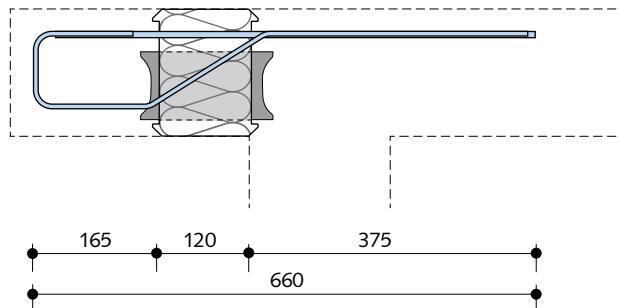


Top view:

HIT-HP/SP OTX1 – Bar spacings

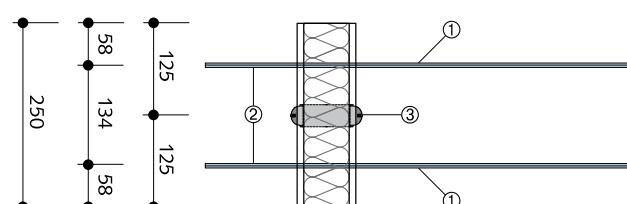

HIT-HP/SP OTX2 – Bar spacings

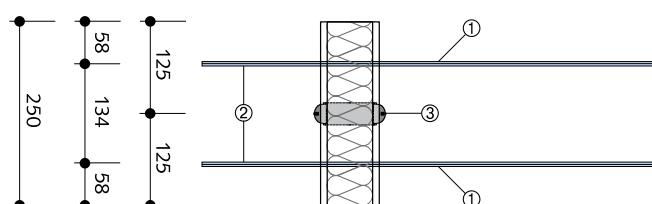

① Tension bars: Ø8 mm, B500B NR

② Shear bars: Ø6 mm oder Ø8 mm, B500B NR

③ double-symmetrical CSB


HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1 MVX/-COR

HIT-HP MV-OTX, HIT-SP MV-OTX


Structural system

Sign convention for calculation

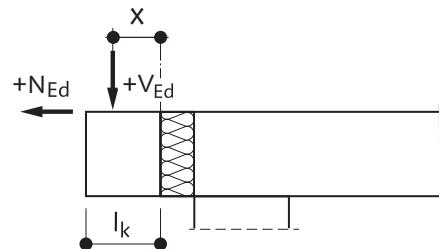

l_k = cantilever length of the bracket
 x = load distance

Top view: Main slab with corbel connected

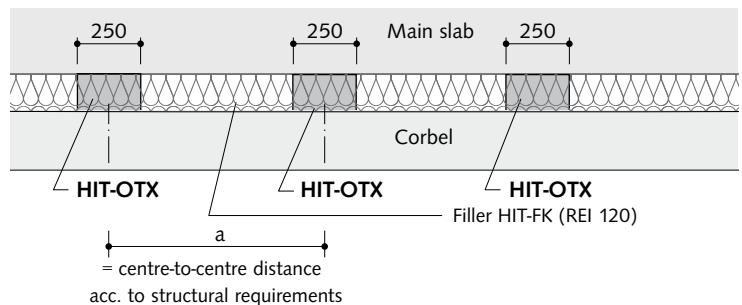

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

Concrete strength, corbel: $\geq C25/30$

Concrete strength, main slab: $C20/25 \geq C25/30$

80

HT / EQ	Element height [mm]	Shear bars ø6								Shear bars ø8							
		Load distance x [mm]								Load distance x [mm]							
		≤ 75	85	95	105	≤ 75	85	95	105	≤ 75	85	95	105	≤ 75	85	95	105
Design values V_{Rd} [kN/element]	180	27.3	28.0	25.9	26.7	24.6	25.4	23.5	24.2	27.8	28.7	26.4	27.2	25.0	25.8	23.8	24.6
	190	28.0	28.0	28.0	28.0	27.6	28.0	26.2	27.0	31.4	32.4	29.7	30.6	28.1	29.0	26.7	27.5
	200	28.8	28.8	28.8	28.8	28.8	28.8	28.1	28.8	32.8	33.7	31.1	31.9	29.5	30.3	28.1	28.8
	210	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	36.4	37.3	34.4	35.2	32.6	33.4	31.0	31.7
	220	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	40.2	41.2	37.9	38.8	35.9	36.7	34.0	34.8
	230	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	44.4	46.4	41.7	42.7	39.4	40.2	37.3	38.1
	240	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	42.8	43.7	40.5	41.3	38.5	39.2	36.6	37.3
	250	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	46.4	47.2	43.8	44.6	41.5	42.3	39.5	40.2
	>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$



All necessary verifications have been already considered. Connecting elements must be verified by the planner.



Load bearing capacity values of further types can be found on the following page.

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

HIT-HP MV-OTX

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

Concrete strength, corbel: $\geq C25/30$
 Concrete strength, main slab: $C20/25 \geq C25/30$

80

HIT-HP OTX2	Element height [mm]	Shear bars ø6															
		Load distance x [mm]															
		≤ 75	85	95	105	115	125	135	145								
Design values V_{Rd} [kN/element]	180	27.3	28.0	25.9	26.7	24.6	25.4	23.5	24.2	22.4	23.1	21.4	22.1	20.6	21.2	19.7	20.3
	190	28.0	28.0	28.0	28.0	27.6	28.0	26.2	27.0	25.0	25.7	23.9	24.6	22.9	23.5	22.0	22.6
	200	28.8	28.8	28.8	28.8	28.8	28.8	28.1	28.8	26.8	27.5	25.6	26.3	24.5	25.2	23.6	24.1
	210	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.2	28.8	27.0	27.6	25.9	26.4
	220	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.3	28.8		
	230	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8		
	240	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	
	250	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	
	>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$

HIT-HP OTX2	Element height [mm]	Shear bars ø8															
		Load distance x [mm]															
		≤ 75	85	95	105	115	125	135	145								
Design values V_{Rd} [kN/element]	180	27.8	28.7	26.4	27.2	25.0	25.8	23.8	24.6	22.7	23.4	21.8	22.4	20.8	21.5	20.0	20.6
	190	31.4	32.4	29.7	30.6	28.1	29.0	26.7	27.5	25.5	26.2	24.3	25.0	23.3	23.9	22.3	22.9
	200	32.8	33.7	31.1	31.9	29.5	30.3	28.1	28.8	26.8	27.5	25.6	26.3	24.5	25.2	23.6	24.1
	210	36.4	37.3	34.4	35.2	32.6	33.4	31.0	31.7	29.5	30.2	28.2	28.8	27.0	27.6	25.9	26.4
	220	40.2	41.2	37.9	38.8	35.9	36.7	34.0	34.8	32.4	33.1	30.9	31.5	29.5	30.1	28.3	28.9
	230	44.4	46.4	41.7	42.7	39.4	40.2	37.3	38.1	35.4	36.1	33.7	34.4	32.2	32.8	30.8	31.4
	240	42.8	43.7	40.5	41.3	38.5	39.2	36.6	37.3	34.9	35.6	33.4	34.0	32.0	32.6	30.7	31.2
	250	46.4	47.2	43.8	44.6	41.5	42.3	39.5	40.2	37.6	38.3	35.9	36.6	34.4	35.0	33.0	33.5
	>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$



All necessary verifications have been already considered. Connecting elements must be verified by the planner.



Load bearing capacity values of further types can be found on the following page.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

1 MVX/-COR

HIT-SP MV-OTX

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

Concrete strength, corbel: ≥C25/30

Concrete strength, main slab: C20/25 ≥C25/30

120

MVX-OU/OD	HIT-SP OTX1	Element height [mm]	Shear bars ø6				Shear bars ø8											
			Load distance x [mm]				Load distance x [mm]											
			≤ 75	85	95	105	≤ 75	85	95	105								
ZVX / ZDX	Design values V _{Rd} [kN/element]	180	22.5	22.7	22.5	22.7	22.5	22.7	21.7	22.4	25.5	26.4	24.2	25.1	23.1	23.9	22.1	22.8
		190	22.5	22.7	22.5	22.7	22.5	22.7	22.5	22.7	29.1	30.2	27.6	28.6	26.2	27.1	25.0	25.8
		200	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	33.3	34.4	31.4	32.5	29.8	30.7	28.3	29.1
		210	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	35.9	36.7	35.8	36.7	33.8	34.8	32.0	32.8
		220	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	37.5	38.6	35.5	36.4	33.6	34.5	32.0	32.7
		230	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	40.1	40.7	39.5	40.5	37.3	38.3	35.4	36.2
		240	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	40.9	41.8	38.7	39.7	36.8	37.7	35.1	35.8
		250	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	43.5	43.9	42.4	43.3	40.2	41.1	38.2	38.9
		>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$

HT / EQ	HIT-SP OTX2	Element height [mm]	Shear bars ø6															
			Load distance x [mm]															
			≤ 75	85	95	105	115	125	135	145								
AT / FT / OTX / FK	Design values V _{Rd} [kN/element]	180	22.5	22.7	22.5	22.7	22.5	22.7	21.7	22.4	20.8	21.5	19.9	20.6	19.2	19.8	18.5	19.1
		190	22.5	22.7	22.5	22.7	22.5	22.7	22.5	22.7	22.5	22.7	22.4	22.7	21.5	22.2	20.7	21.3
		200	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	23.8	24.1	22.9	23.5	22.0	22.7
		210	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1
		220	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1
		230	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1	24.0	24.1
		240	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7
		250	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7	25.6	25.7
		>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$

All necessary verifications have been already considered. Connecting elements must be verified by the planner.

Load bearing capacity values of further types can be found on the following page.

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE

HIT-HP MV-OTX, HIT-SP MV-OTX

Load bearing capacity values according to EN 1992-1-1 (EC2)



V_{Rd} in one direction

Concrete strength, corbel: ≥C25/30

Concrete strength, main slab: C20/25 ≥C25/30




HIT-SP OTX2	Element height [mm]	Shear bars ø8															
		Load distance x [mm]															
		≤ 75	85	95	105	115	125	135	145								
Design values V _{Rd} [kN/element]	180	25.4	26.4	24.2	25.1	23.0	23.9	22.0	22.8	21.1	21.8	20.2	20.9	19.4	20.1	18.7	19.3
	190	29.0	30.1	27.5	28.5	26.2	27.1	25.0	25.8	23.8	24.6	22.8	23.6	21.9	22.6	21.0	21.7
	200	33.2	34.3	31.3	32.4	29.7	30.7	28.2	29.1	26.9	27.7	25.7	26.5	24.6	25.3	23.6	24.3
	210	35.9	36.7	35.7	36.7	33.7	34.7	31.9	32.8	30.3	31.2	28.8	29.7	27.5	28.3	26.3	27.1
	220	37.4	38.5	35.4	36.4	33.6	34.5	31.9	32.8	30.5	31.3	29.1	29.9	27.9	28.6	26.8	27.4
	230	40.1	40.7	39.4	40.4	37.3	38.2	35.4	36.2	33.6	34.5	32.1	32.9	30.7	31.4	29.4	30.1
	240	40.5	41.8	38.7	39.6	36.8	37.6	35.0	35.8	33.5	34.2	32.0	32.8	30.7	31.4	29.5	30.2
	250	42.5	43.9	42.3	43.2	40.1	41.0	38.2	39.0	36.4	37.2	34.8	35.5	33.3	34.0	32.0	32.6
	>250	Available on request. See inside back cover for contact information.															

$$N_{Rd} = \pm 0.1 \times V_{Rd}$$




All necessary verifications have been already considered. Connecting elements must be verified by the planner.

On-site reinforcement HIT-OTX

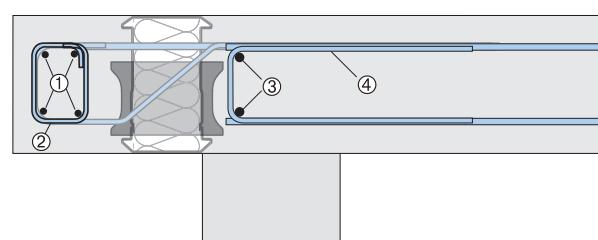

- ① 4x ø8
- ② Stirrups 5x ø8 per HIT-OTX Element
- ③ 2x ø8
- ④ U-bar min. ø6 / 25 cm as on-site connecting reinforcement



i An installation diagram can be found at our website www.halfen.com.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8


Building Physics,
Planning

HIT-HP MV-OTX, HIT-SP MV-OTX

Determining the axial spacing a

Calculation of the maximum element spacing of the HIT-OTX Elements is dependent on the acting shear forces $+v_{Ed}$ [kN/m] and the axial forces $\pm n_{Ed}$ [kN/m].


- ▶ **Step 1:** Find V_{Rd} (N_{Rd}) in the table “**Load bearing capacity values**” to select shear bars of either $\varnothing 6$ mm or $\varnothing 8$ mm this is dependent on the element height h , the concrete strength class and load distance x .
- ▶ **Step 2:** Calculate the element spacing a
 $a_{max,1} = V_{Rd}/v_{Ed}$ [m]
 $a_{max,2} = N_{Rd}/n_{Ed}$ [m]
 $a = \min(a_{max,1}; a_{max,2})$
- ▶ **Step 3:** Check the calculated load bearing capacities (per element)
(optional) $v_{Ed} \cdot a = V_{Ed} \leq V_{Rd}$
 $n_{Ed} \cdot a = N_{Ed} \leq N_{Rd}$

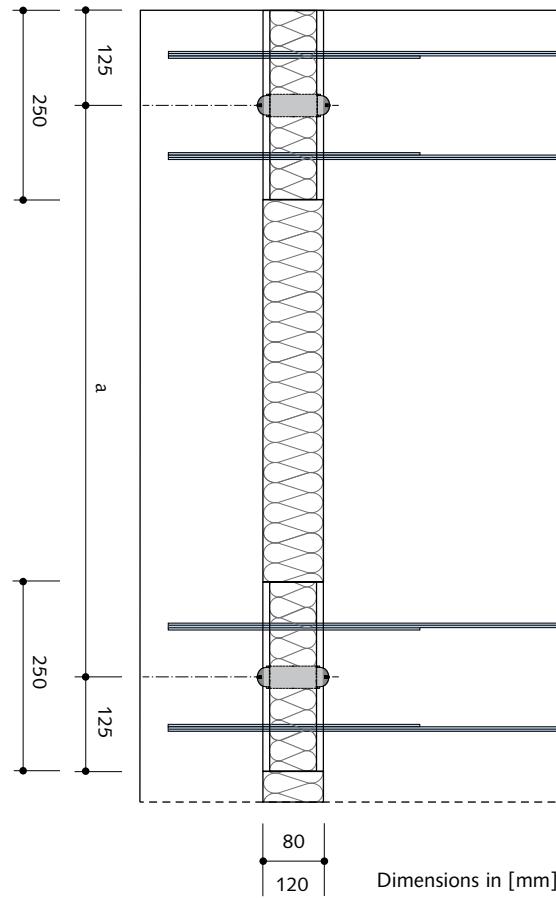

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

HIT-HP FK, HIT-SP FK

- Filler without support elements as a complementary element in all applications
- Mineral wool construction product class A1; used as an insulating material

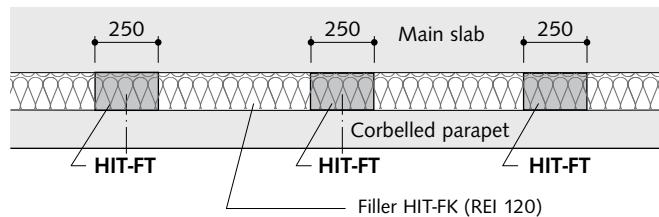

Top view:

Main slab with attached corbelled parapet


HIT-HP FK – High Performance

with 80 mm insulation thickness

HIT-SP FK – Superior Performance

with 120 mm insulation thickness

① without CSB

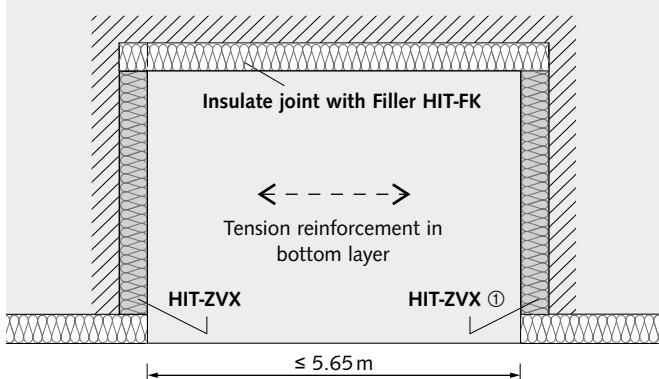

Content	Type	Page
Practical width adjustment	HIT-HP FK, HIT-SP FK	118

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

HIT-HP FK, HIT-SP FK


Optimized Combination

HIT fillers ease the installation of HIT Elements as planned spacings can be filled with HIT-FK. No need to cut insulation to size on site.

The HIT-HP FK and HIT-SP FK Fillers are available in the following sizes:

- width b: 6 – 100 cm
- height h: 16 – 35 cm

Combination of HIT-HP / HIT-SP elements (B = 0.25/0.50/1.00 m) and fillers (examples)

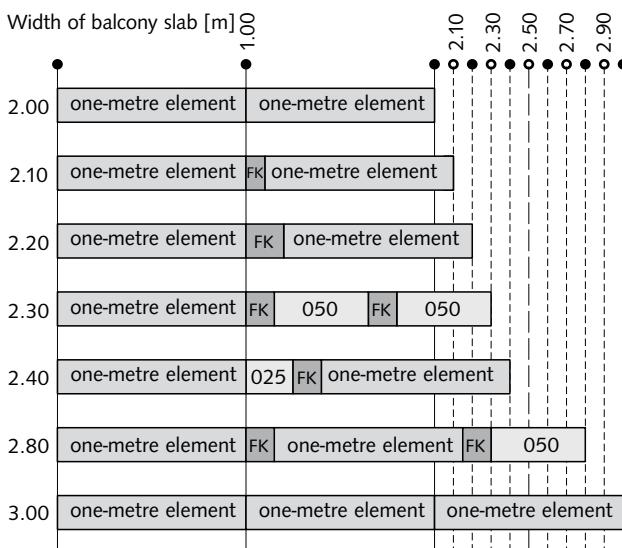


The increase of the loaded areas when HIT fillers are used is compensated by the HIT design program with the respective additions.

FK = Filler HIT-HP FK (see below)

025 = Element with B = 0.25 m

050 = Element with B = 0.50 m

Use of one-metre elements and short units

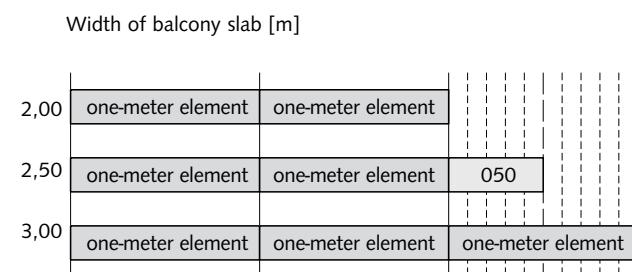


Ordering example for HIT Fillers

HIT-HP FK - 16 - 025

1 2 3 4 5

Type designation

- ① Product group
- ② Joint spacing 80 mm (HP) or 120 mm (SP)
- ③ Connection type
- ④ Element height h [cm]
- ⑤ Element width B [cm]

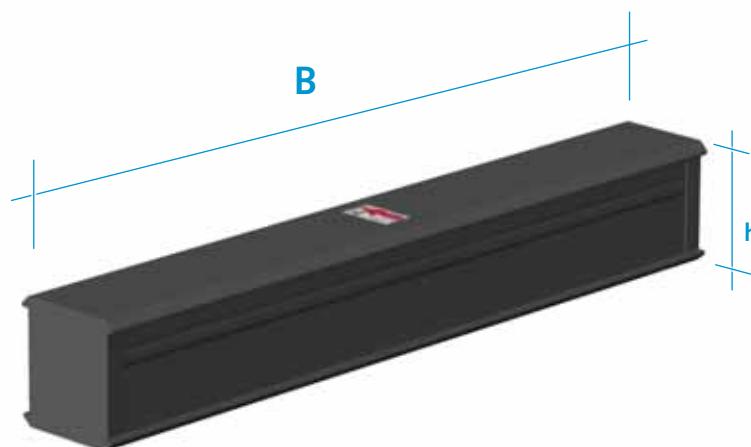

HALFEN HIT INSULATED CONNECTION

Material Specification and Test Certificates

Material specification

Tension bars	Reinforcing stainless steel type B500B NR welded to reinforcing steel B500B or alternatively: welded stainless steel rod material no. W 1.4401, W 1.4404, W 1.4571 of strength class S 460 according to National Technical Approval no. Z-30.3-6 welded to B500B reinforcing steel according to DIN 488
Compression bearings	Stainless steel material no. W 1.4404, W 1.4362 according to National Technical Approval no. Z-30.3-6
Shear bars	Reinforcing stainless steel B500B NR (if required, welded to reinforcing steel B500B)
U-bars	B500B reinforcing steel
Transport bars	B500B reinforcing steel
Insulating material	WLG 035 expanded polystyrene foam
Fire boards (F90 type)	Fibre cement board, Construction material class A1
Connecting components	
Concrete	General purpose concrete according to EN 1992-1-1 / EN 206-1 with a raw density between 2000 kg/m ³ and 2600 kg/m ³ (light weight concrete is not permitted). Minimum concrete strength C20/25 and depending on exposure classes according to EN 1992-1-1/NA, table NA.E.1
On-site reinforcement	B500 reinforcing steel

Test certificates

Technical Approvals	
HALFEN HIT Insulated connection	DIBt Berlin, National Technical Approval no. Z-15.7-238 Connection for reinforced concrete slabs according to EN 1992-1-1 and EN 1992-1-1/NA – including fire protection (F90 type)



Approvals and type tests on the internet

The approvals and type tests can be found at www.halfen.com/downloads/brochures. Or simply scan the code, select the document and click to download a PDF file.



HALFEN HIT INSULATED CONNECTION

HIT-ST, HIT-WT


7

HIT-ST:

- Cantilever connection for thermal separation of cantilevered reinforced concrete beams.
- Transfers high bending moments and shear forces.

HIT-ST

Standard dimensions
 $B/H = 0.2 / 0.4 \text{ m}$

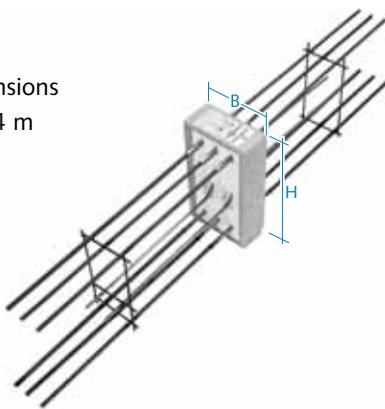

Application example

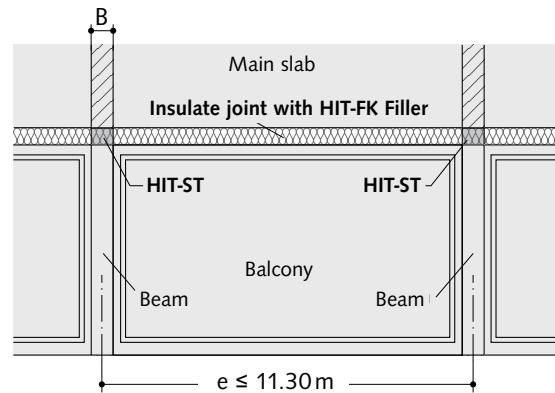



Fig. 1: Thermal insulated beam connections

HIT-WT:

- Wall connection for thermal separation of a cantilevered shear wall from the building.
- Transfers bending moments as well as vertical and horizontal shear forces.

HIT-WT

Standard dimensions
 $B = 0.15 - 0.25 \text{ m}$
 $H = 1.5 - 3.5 \text{ m}$

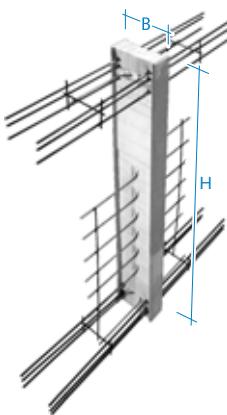

Application example

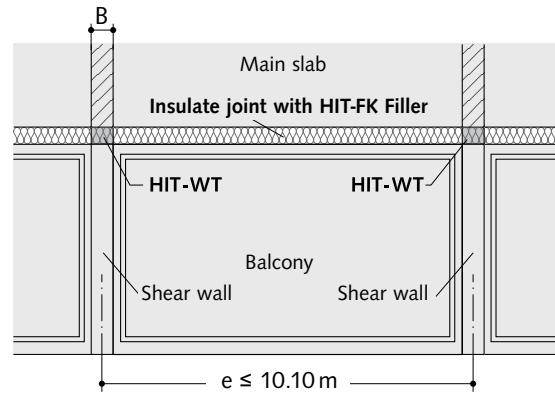



Fig. 2: Thermal insulated shear wall connections

Content	Type	Page
Product description	HIT-ST	121
Product description	HIT-WT	122
Installation diagram	HIT-WT	123

HALFEN HIT INSULATED CONNECTION

HIT-ST

Product description

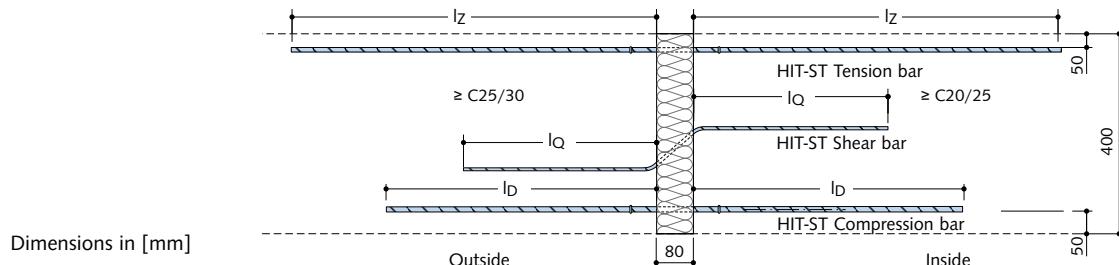

Components	Load range		HIT-ST 1	HIT-ST 2	HIT-ST 3	HIT-ST 4
	Width	B [m]	0.20	0.20	0.20	0.20
Tension bars	n · Ø [mm]	n · Ø [mm]	3 Ø10	3 Ø12	3 Ø14	3 Ø16
	Standard/VB2	l_z [mm]	700 / 900	740 / 1060	850 / 1220	1270 / 1760
Compression bars	n · Ø [mm]	n · Ø [mm]	3 Ø12	3 Ø14	3 Ø16	3 Ø20
	Standard/VB2	l_D [mm]	550 / 900	565 / 1035	635 / 1170	770 / 1435
Shear bars	n · Ø [mm]	n · Ø [mm]	2 Ø8	2 Ø10	2 Ø12	2 Ø14
	Standard/VB2	l_Q [mm]	505 / 695	565 / 765	625 / 875	695 / 975
On-site stirrups	erf. A_s [cm²]		1.09	1.53	2.09	2.83
	n · Ø [mm]	selected:	2 Ø8	2 Ø8	2 Ø10	2 Ø10

Load bearing capacities and product types


Load bearing capacity of the element		Concrete strength: C20/25			
Bending moment	M_{Rd} [kNm]	24.1	33.3	43.6	60.8
Shear force	V_{Rd} [kN]	25.3	36.1	50.2	66.3
Expansion joint spacing	e [m]	11.3	10.1	9.2	8.0

Ordering example

Type designation


- ① Product group
- ② Connection type
- ③ Bond quality*
- ④ Fire protection*

HIT - ST1 - VB2 * - F90 *




*If selecting "standard" for bond or "Normal" for fire protection, the entry will be omitted in the designation.

On-site reinforcement / Installation diagram

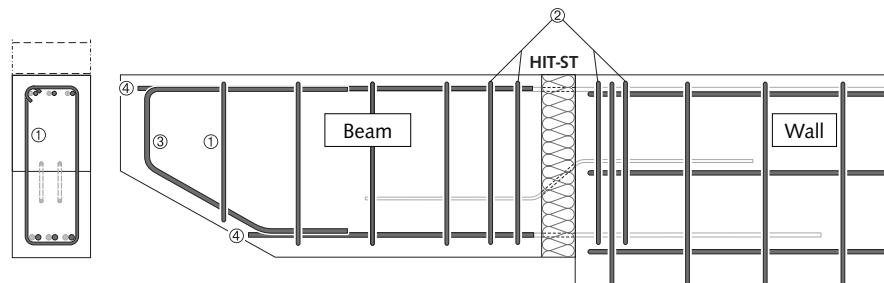

- ① U-bar reinforcement according to the structural engineer's specifications
- ② Suspension and tensile splitting reinforcement in accordance with the above table "Product description"
- ③ On-site edge frame
- ④ Connecting reinforcement of the tension and compression bars

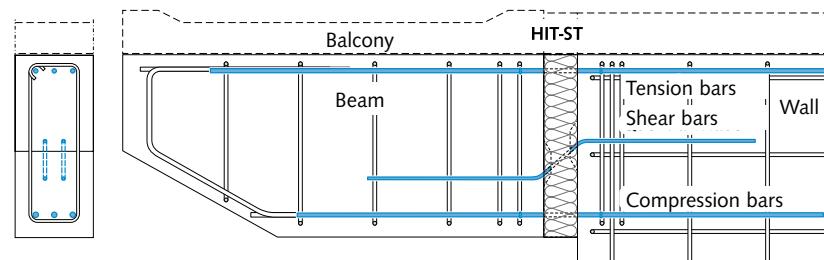

Fix the on-site connecting reinforcement in accordance with the structural engineer's drawings and specifications. Observe the required A_s values specified in the table above.

HALFEN HIT INSULATED CONNECTION

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7


ST / WT

8

Building Physics,
Planning

HIT-WT

Product description

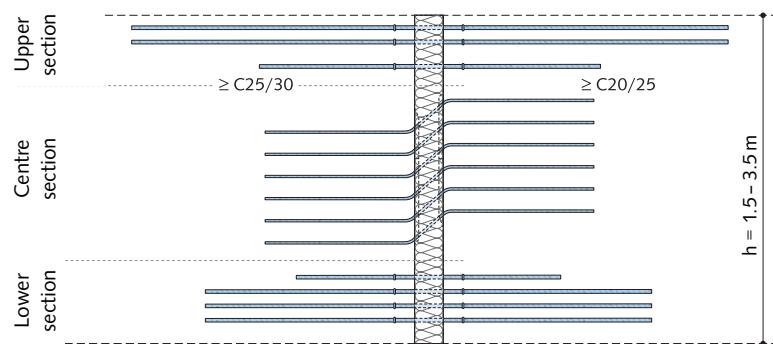

Components	Load range for wall thickness [cm]	HIT-WT1	HIT-WT2	HIT-WT3	HIT-WT4
Tension bars	n × Ø [mm]	4 Ø8	4 Ø8	4 Ø10	4 Ø12
Compression bars	n × Ø [mm]	4 Ø10	6 Ø10	6 Ø12	6 Ø14
Shear bars					
- vertical	n × Ø [mm]	6 Ø6	6 Ø8	6 Ø10	6 Ø12
- horizontal	n × Ø [mm]	2 × 2 Ø6			

Load bearing capacities and product types

Load bearing capacity of the element		Concrete strength: C20/25			
Bending moment	M _{Rd} [kNm]				
for wall height h [cm]	150 - 200	63.4	81.9	120.1	158.7
	200 - 250	87.0	113.4	166.4	219.9
	> 250	110.7	144.9	212.7	281.2
Shear capacity	V _{Rd} [kN]	33.9	68.1	116.0	146.3
Expansion joint spacing	e [m]	11.3	11.3	11.3	10.1

Basic types – Ordering example

Type designation

- ① Product group
- ② Connection type
- ③ Wall thickness [cm]
- ④ Wall height [cm]
- ⑤ Fire protection*


HIT - WT2 - 19 - 225 - F90 *

*When ordering the standard version,
omit the reference from the specification.

HALFEN HIT INSULATED CONNECTION

HIT-WT


Installation diagram

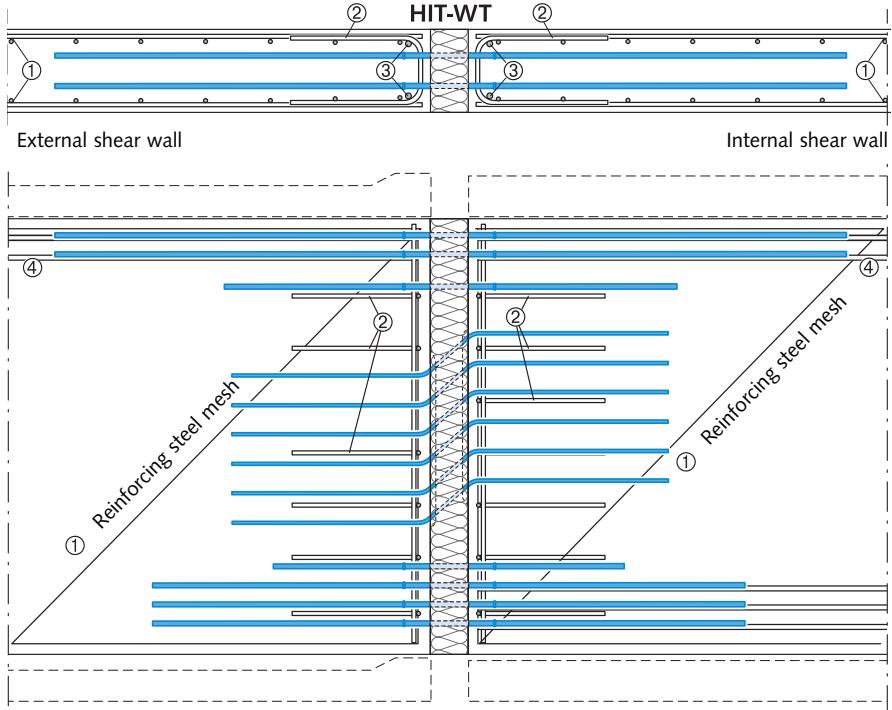

The thermal insulated HIT-WT wall connection is available for **wall heights $h = 1.5 \text{ to } 3.5 \text{ m}$** . For easy transportation and handling, the HIT-WT units are shipped **in multiple units, minimum of at least three separate component groups** (upper, centre and lower section).

- ① On-site wall reinforcement as defined by the structural engineer.
- ② U-bars as structural edge frame.
- ③ Minimal two 8 mm Ø rebars, in the inner and outer shear wall.
- ④ Connecting reinforcement of the HIT tension bars depends on the structural requirements.

On-site connecting reinforcement

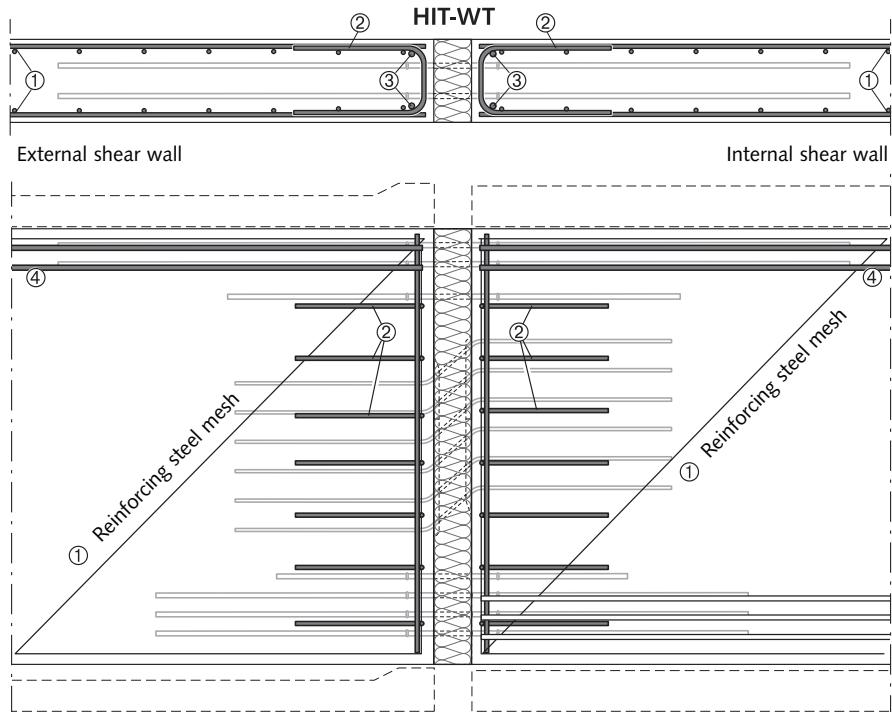

HIT Custom solutions

Our technical support team is available to provide support in your project with custom solutions using HALFEN HIT Insulated connections.

Contact: → see inside back cover

HALFEN HIT INSULATED CONNECTION

1

MVX/-COR

2

MVX-OU/OI

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8


Building Physics,
Planning

Building Physics

8

- Building physics: Basics and specific values
- Software and tender specifications

The temperature field in the cross-section (shown as isotherms) illustrates the advantages of the HALFEN HIT Insulated connection for the required

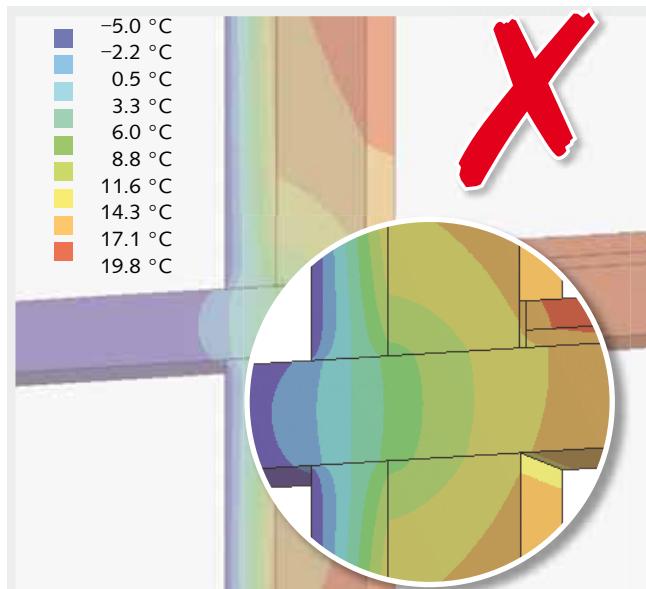


Temperature below the dew point – negative effects

Balcony slab – installed without insulation:

- thermal bridge
- condensation
- moisture penetration
- mould formation on ceiling and wall
- cracks in the concrete slabs

minimum thermal insulation: For instance no condensation and mould growth in critical areas.

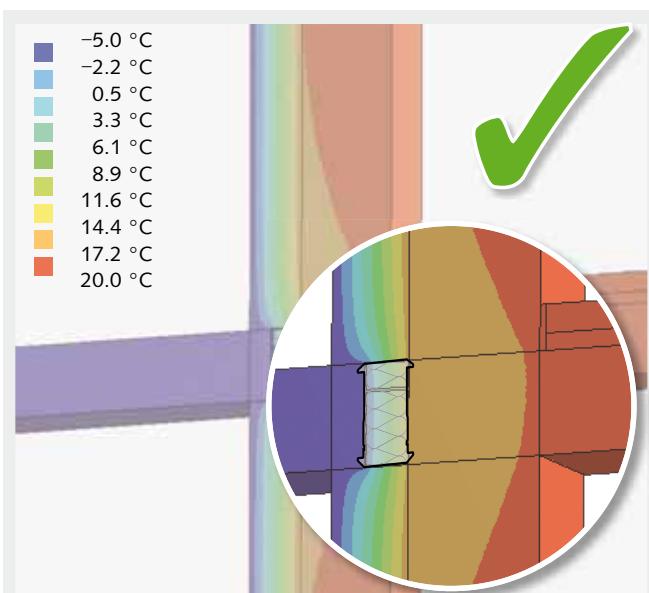

Temperature OK – positive effects

Balcony slab – with HALFEN Insulated connection HIT-HP and HIT-SP:

- effective thermal insulation of the balcony slab
- no condensation, temperature above the dew point
- perfectly designed structural physics
- prevents cracks in the concrete resulting from extrem thermal expansion in the balcony connection

Contents

Page

Thermal insulation basics	125
HALFEN ψ -Calculator	128
Building authority approved thermal values HIT-HP MVX, HIT-SP MVX	129
Building authority approved thermal values HIT-HP ZVX, HIT-SP ZVX	134
Passive House Institute certificates	137
Sound proofing according to DIN 4109	139
Fire protection according to EN 13501 and DIN 4102	140
HIT Software	141

HALFEN HIT INSULATED CONNECTION

Building Physics

Thermal insulation

Structural thermal bridges such as balconies may lead to moisture problems resulting from lower temperatures on internal surfaces. Moreover, thermal bridges normally cause additional loss of heat.

Consequently, correct planning using thermal insulated balcony slab connections:

- prevent condensation and mould formation by fulfilling the minimum thermal insulation requirements according to DIN 4108-2
- reduce the transmission heat losses in the area of the connections

Depending on the temperature, the air can retain different amounts of moisture. With a rise in air temperature, the amount of storable moisture increases. In a room the air is constantly moving (room air flow). The water content in a defined flowing air volume remains nearly constant.

However, the temperature of the air changes when the air flows along colder external components.

The storage capacity of the air decreases as the air cools down, resulting in an increase in relative humidity. Condensation always occurs when the relative humidity reaches 100%. Assuming a room temperature of 20°C and a relative humidity of 50% condensation would occur when the air cools down to approx. 9°C (see dew point diagram on the right). If, under the given conditions, the temperature at the inner surface of an adjacent component, for instance the wall or the ceiling, is 9°C or colder, condensation will form on this surface.

Correct application of HALFEN HIT Insulated connections prevents the surface of the wall/ceiling from falling below the dew point and therefore prevents condensation. An increased relative humidity of approx. 80% above the surface of the component promotes mould growth.

In a standard scenario with an indoor temperature of 20°C and a relative humidity of 50%, cooling down the air to approximately 13°C raises the relative humidity to 80%.

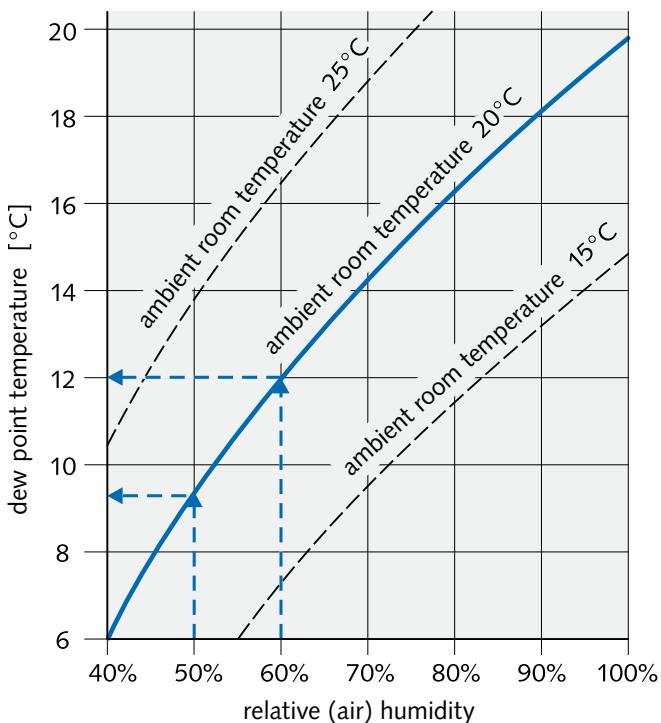


Fig.: Dew point diagram

HALFEN HIT Insulated connections prevent cooling of the adjacent components at the inside of the balcony below the critical temperatures for condensation and mould growth. The criterion to prevent mould growth is the temperature factor f_{Rsi} . It is defined as the ratio of the *lowest surface temperature minus outside temperature* to the total temperature difference (*inside temperature minus outside temperature*).

$$f_{Rsi} = \frac{\theta_{si} - \theta_e}{\theta_i - \theta_e}$$

DIN 4108-2 stipulates that the temperature factor f_{Rsi} must be higher than 0.7 for all component connections.

According to the National Technical Approvals Z-15.7-293, Z-15.7-309 and Z-15.7-312 the minimum thermal insulation requirement in accordance with DIN 4108-2 has already been proved and applies to the complete HALFEN HIT Insulated connections load range.

HALFEN HIT INSULATED CONNECTION

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Building Physics

Reduction of thermal transmission

The Energy Saving Regulation (EnEV) specifies that the primary energy demand required to heat a building must be limited. To calculate this energy demand, thermal bridges through concrete balcony slabs must also be taken into account. Monolithic balcony systems without thermal separation have the same effect as cooling fins due to their geometry and therefore cause substantial heat loss.

Thermal bridges can be calculated using three different methods:

Method 1: An increase of all thermal transmission coefficients by $\Delta U_{WB} = 0.10 \text{ W}/(\text{m}^2\text{K})$ for the entire heat transmitting outer surface without any further analysis of the thermal bridges.

Method 2: When consistently adhering to the regulations for energetically efficient component connections according to DIN 4108, supplementary sheet 2, the effect of the thermal bridge is taken into account with the increase of the thermal transmission coefficient for the total heat transmitting surface area by $\Delta U_{WB} = 0.05 \text{ W}/(\text{m}^2\text{K})$.

Method 3: With a detailed verification of the specific transmission loss of the thermal bridges according to DIN V 4108-6 or DIN V 18599 or by determination an individual additional value for thermal bridges.

HALFEN HIT Insulated connections provide the engineer with every opportunity to determine the effect of thermal bridges by using all verification methods mentioned above.

Method 1 is used to calculate the highest transmission losses. Engineers who don't consider the structural design of thermal bridges are "disciplined" by the regulations of the Energy Saving Regulation (EnEV) with high additional transmission losses.

The simplified verification method (**Method 2**) where $\Delta U_{WB} = 0.05 \text{ W}/(\text{m}^2\text{K})$ is applied can be used because HALFEN HIT Insulated connections are classified in DIN 4108, annex 2, according to National Technical Approval Z-15.7-293, Z-15.7-309 and Z-15.7-312. The respective verification has also been proven for the HALFEN HIT Insulated connections with the highest reinforcement content.

Method 3: In most cases, even when conforming to the specifications stipulated in DIN 4108, the calculated specific transmission loss H_T (resulting from standard cross-sections and thermal bridges) is still so high that the max. thermal ceiling set by the EnEV is not easy to maintain. Planners have to deal with this problem when they have to meet predefined criteria.

In these cases it is necessary to determine the exact transmission losses of all thermal bridges in a detailed analysis. For structural component linear connections the linear thermal transmission coefficients (ψ -value) are defined by set standards.

Some building products manufacturers specify a λ_{eq} -value for the insulation capacity of thermal separation elements. λ_{eq} is the equivalent thermal conductivity of a replacement cross-section of inhomogeneous building products without any metallic penetration such as for a special insulation element at the base of masonry. In this case, the ψ -value for the detailed analysis of the thermal bridges can be determined with the λ_{eq} -value by a two-dimensional calculation of the thermal bridges by the engineer without having to model a geometrically complex insulation element at the base of masonry.

This method is only applicable to a limited extent for structural components with metallic-like penetrations as found in balcony slab connection.

For these cases, the basic principle and boundary conditions required to calculate a value for equivalent thermal conductivity to a uniform standard are not regulated.

The thermal values for HALFEN Insulated connection types HIT-HP MVX / HIT-SP MVX and HIT-HP ZVX / HIT-SP ZVX are included in the European Technical Approval ETA-13/0546 and National Technical Approval Z-15.7-293 and Z-15.7-312.

Standard specification for non-residential buildings

The DIN V 18599 specifications regulates the calculation of annual primary energy demand of non-residential buildings, thermal bridges are calculated analogously, i.e. they can also be alternatively calculated using method 1, 2 or 3 to determine specific heat transmission loss H_T and the annual energy demand.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Building Physics

Standard specification for the calculation of thermal bridges to determine the annual primary energy demand according to the Energy Saving Regulation EnEV 2009

Residential building			
Description/ basics standard	Method 1 without verifications $\Delta U_{WB} = 0.10 \text{ W}/(\text{m}^2\text{K})$	Method 2 specification details or equivalent details $\Delta U_{WB} = 0.05 \text{ W}/(\text{m}^2\text{K})$	Method 3 Exact calculation of thermal bridges with linear thermal transmission coefficients (= ψ -values)
Restricting the annual primary energy demand to the permissible value required in the EnEV 2009	$Q_P, \text{act.} < Q_P, \text{max.}$ Q_P, max	Subject to reference building according to EnEV 2009, Annex 1 for residential buildings (or Annex 2 of EnEV 2009 for non-residential buildings)	
Actual annual primary energy demand for a residential building according to DIN V 4108-6 and DIN V 4701-10	$Q_P, \text{act.} = e_P (Q_h + Q_w)$ Q_h $Q_w = A_N \times 12.5 \text{ kWh}/(\text{m}^2\text{a})$ e_P	Annual thermal heat demand Useful heat demand for water heating energy requirement value of a system related to primary energy	
Annual thermal heat demand Q_h according to DIN V 4108-6 (monthly balance)	$Q_h = \sum_M Q_{h,M}/\text{pos}$	The annual thermal heat demand is the sum of all monthly heat demands with a "positive" thermal heat demand value	
Monthly thermal heat demand $Q_{h,M}$	$Q_{h,M} = 0.024 (H_T + H_V) (\theta_i - \theta_{e,M}) t_M - \eta_M Q_{g,M}$	Note: the monthly thermal heat demand is positive when the losses exceed the gains	
Specific transmission heat loss H_T	$H_T = \sum_i U_i A_i F_{x,i} + \Delta U_{WB} \times A$	$H_T = \sum_i U_i A_i F_{x,i} + \sum_j l_j \psi_j$	
Consideration of thermal bridges	$\Delta U_{WB} = 0.10 \text{ W}/(\text{m}^2\text{K})$ fixed additional value	$\Delta U_{WB} = 0.05 \text{ W}/(\text{m}^2\text{K})$ half the fixed additional value	Approved ψ -values for all component connections (e.g. building edges, window reveals, wall and ceiling connections, ceiling supports, thermally decoupled balcony slabs) ψ -values for different assembly situations of the HIT connections, see tables → pages 129ff.

Thermal bridge characteristic values according to National Technical Approval

The physical properties for HALFEN Insulated connections HIT-HP MVX/HIT-SP MVX and HIT-HP ZVX/HIT-SP ZVX in various type of applications (based on a three-dimensional FEM calculation) were determined in tests by the Institute for Materials Research and Testing at the Bauhaus University MFPA in Weimar in accordance with EN ISO 10211 (linear coefficient of thermal transmission ψ , minimal surface temperature θ_{min} and temperature factor f_{Rsi}).

These values were officially integrated into the European Technical Approval ETA-13/0546 and the national technical approvals Z-15.7-293 and Z-15.7-312.

For the first time building authority approved ψ -values for a detailed standard-compliant thermal bridge verification for insulated balcony connections are available throughout Europe.

Compliance with the approved physical properties for HALFEN Insulated connections HIT-HP and HIT-SP is guaranteed by third party monitoring.

The approved physical property values for HALFEN Insulated connections HIT-HP MVX/HIT-SP MVX and HIT-HP ZVX/HIT-SP ZVX are listed in the tables on the following pages.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Building Physics

HALFEN ψ -Calculator – Thermal bridge tool for HALFEN Insulated connections



To obtain an Energy Performance Certification (EPC) according to the German Energy Saving Ordinance (EnEV Energieeinsparverordnung) verification of thermal bridges are required. To calculate the thermal bridges in balcony connections ψ -values are required to model the structure.

The essential key values for this are provided by HALFEN.

Screenshot HIT-Calculator Web App: Parameter input window

Five easy stages are required to enter the necessary parameters:

- ▶ selection of wall design
- ▶ selection of wall construction
- ▶ selection of slab details
- ▶ option to select windows/doors
- ▶ output of selected HALFEN HIT Insulated connection (type)

Select between an External Thermal Insulation Composite System (ETICS), a monolithic or double-leaf and a sandwich wall construction for calculation. All wall constructions consist of different layers, for example, an exterior render, insulation or the load-bearing layer. The thermal conductivity, materials and the dimensions of the various layers can be defined in further stages.

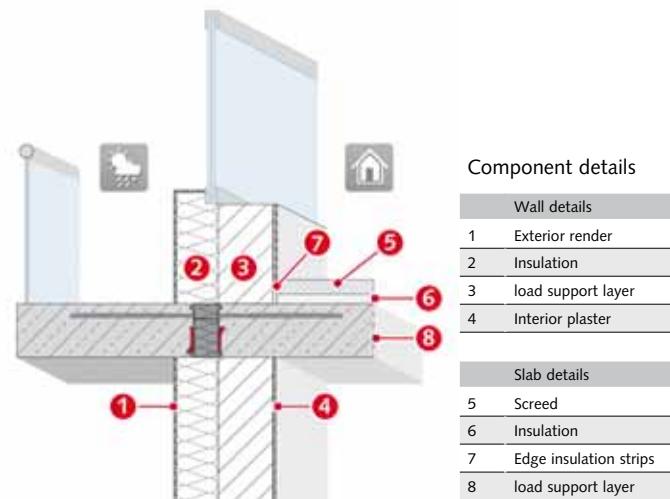


Illustration of an exterior wall: Here an example using an ETICS system with a window.

User-friendly selection of standard materials and their properties are available to ensure efficiency. This tool also provides the option of selecting windows and doors above a balcony.

The results of the ψ -value calculation can be output as a concise .pdf document with all relevant parameters, which can be printed and included in your planning and project documentation. Individual project details can also be included in the PDF output.


Using a link, previous defined installation situations can be reused; these can be edited or adapted with new specifications.

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE



Building Physics

Thermal values according to Technical Approvals

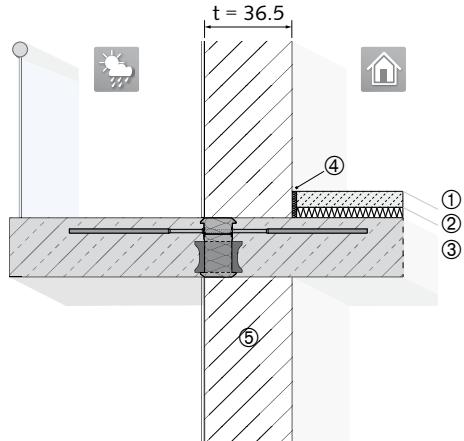


Installation diagram für monolithic masonry

Thermal transmission coefficient, standard cross section "Exterior wall":
 $U = 0.311 \text{ W}/(\text{m}^2\text{K})$

- external wall (monolithic): width $t = 36.5 \text{ cm}$ ($\lambda = 0.12 \text{ W}/(\text{mK})$)
- floor construction (indoor):
 - ① cement screed 5 cm ($\lambda=1.35 \text{ W}/(\text{mK})$)
 - ② footfall insulation 3 cm ($\lambda=0.035 \text{ W}/(\text{mK})$)
 - ③ reinforced concrete floor 18 cm ($\lambda=2.3 \text{ W}/(\text{mK})$)
 - ④ edge insulation strips 1 cm ($\lambda = 0.14 \text{ W}/(\text{mK})$)
 - ⑤ monolithic masonry



The thermal values only apply for the specified installation applications and boundary conditions.

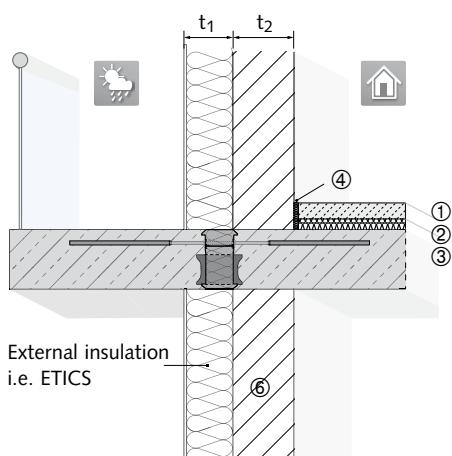

Installation diagram for masonry with ETICS

Standard cross section for thermal transmission coefficient "Exterior wall":


- thermally insulated exterior wall:
thickness $t_1 = 14 \text{ cm}, 22 \text{ cm}$ or 30 cm ($\lambda = 0.035 \text{ W}/(\text{mK})$)
- exterior (lime-sandstone): thickness $t_2 = 24 \text{ cm}$ ($\lambda = 0.99 \text{ W}/(\text{mK})$)
- floor construction (interior):
 - ① cement screed 5 cm ($\lambda=1.35 \text{ W}/(\text{mK})$)
 - ② footfall insulation 3 cm ($\lambda=0.035 \text{ W}/(\text{mK})$)
 - ③ reinforced concrete floor 18 cm ($\lambda=2.3 \text{ W}/(\text{mK})$)
 - ④ edge insulation strips 1 cm ($\lambda=0.14 \text{ W}/(\text{mK})$)
 - ⑥ lime-sandstone masonry

ETICS = External Thermal Insulation Composite Systems

Calculating Ψ -values with the HALFEN App

Calculations of thermal values for the HALFEN Insulated connection types HIT-HP MVX, HIT-SP MVX, HIT-HP ZVX and HIT-SP ZVX is easy with the HIT-Calculator; a mobile application for your smartphone or tablet.

- ▶ available at our website under Downloads/Apps/ HIT-Calculator Web App

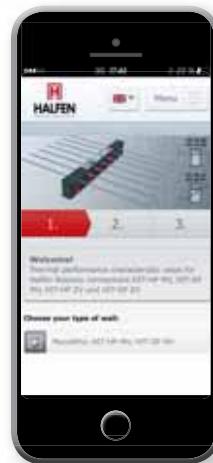

HALFEN HIT App on the Internet

Scan the QR Code on the left to download the HALFEN app to calculate Ψ -values for your project.



HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE

1

MVX/-COR

Building Physics

2

MVX-OU/OD

3

ZVX / ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Thermal bridge characteristic values for HIT-HP MVX for monolithic masonry										
	Thermal conductivity λ in [W/(mK)]	0.18			0.12			0.08		
	Thermal transmission coefficient of standard cross section "External wall" U in W/(m ² K)	0.455			0.311			0.211		
	Load range	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③
1	HIT-HP MVX- 0404-18-100-35	0.168	15.49	0.819	0.180	15.91	0.836	0.186	16.21	0.848
2	HIT-HP MVX- 0504-18-100-35	0.173	15.45	0.818	0.185	15.86	0.834	0.192	16.15	0.846
3	HIT-HP MVX- 0604-18-100-35	0.178	15.41	0.817	0.190	15.82	0.833	0.197	16.10	0.844
4	HIT-HP MVX- 0804-18-100-35	0.188	15.35	0.814	0.200	15.74	0.829	0.207	16.01	0.840
5	HIT-HP MVX- 0505-18-100-35	0.186	15.31	0.813	0.199	15.70	0.828	0.207	15.97	0.839
6	HIT-HP MVX- 0705-18-100-35	0.196	15.25	0.810	0.209	15.62	0.825	0.217	15.88	0.835
7	HIT-HP MVX- 0805-18-100-35	0.201	15.21	0.809	0.214	15.58	0.823	0.222	15.83	0.833
8	HIT-HP MVX- 0506-18-100-35	0.198	15.19	0.807	0.212	15.55	0.822	0.220	15.80	0.832
9	HIT-HP MVX- 0606-18-100-35	0.203	15.15	0.806	0.217	15.50	0.820	0.226	15.75	0.830
10	HIT-HP MVX- 0706-18-100-35	0.208	15.12	0.805	0.222	15.46	0.819	0.231	15.70	0.828
11	HIT-HP MVX- 0906-18-100-35	0.217	15.06	0.802	0.232	15.39	0.816	0.241	15.62	0.825
12	HIT-HP MVX- 1006-18-100-35	0.222	15.03	0.801	0.236	15.35	0.814	0.246	15.58	0.823
13	HIT-HP MVX- 1106-18-100-35	0.226	15.00	0.800	0.241	15.32	0.813	0.251	15.54	0.821
14	HIT-HP MVX- 0607-18-100-35	0.214	15.03	0.801	0.229	15.36	0.814	0.239	15.59	0.824
15	HIT-HP MVX- 0707-18-100-35	0.219	15.00	0.800	0.234	15.33	0.813	0.244	15.55	0.822
16	HIT-HP MVX- 0907-18-100-35	0.228	14.94	0.797	0.244	15.25	0.810	0.254	15.46	0.818
17	HIT-HP MVX- 1007-18-100-35	0.233	14.91	0.796	0.249	15.22	0.809	0.259	15.42	0.817
18	HIT-HP MVX- 1107-18-100-35	0.237	14.88	0.795	0.253	15.18	0.807	0.263	15.38	0.815
19	HIT-HP MVX- 1207-18-100-35	0.242	14.85	0.794	0.258	15.15	0.806	0.268	15.35	0.814
20	HIT-HP MVX- 1407-18-100-35	0.250	14.80	0.792	0.266	15.09	0.803	0.277	15.27	0.811
21	HIT-HP MVX- 0408-18-100-35	0.215	14.99	0.799	0.230	15.31	0.812	0.240	15.53	0.821
22	HIT-HP MVX- 0708-18-100-35	0.230	14.89	0.795	0.246	15.19	0.808	0.256	15.40	0.816
23	HIT-HP MVX- 0808-18-100-35	0.234	14.85	0.794	0.251	15.16	0.806	0.261	15.35	0.814
24	HIT-HP MVX- 1008-18-100-35	0.243	14.80	0.792	0.260	15.09	0.803	0.271	15.28	0.811
25	HIT-HP MVX- 1208-18-100-35	0.252	14.74	0.790	0.269	15.02	0.801	0.280	15.20	0.808
26	HIT-HP MVX- 1308-18-100-35	0.256	14.72	0.789	0.273	14.99	0.800	0.284	15.17	0.807
27	HIT-HP MVX- 1309-18-100-35	0.266	14.61	0.784	0.284	14.87	0.795	0.295	15.04	0.801
28	HIT-HP MVX- 0610-18-100-35	0.245	14.71	0.788	0.262	14.98	0.799	0.273	15.16	0.807
29	HIT-HP MVX- 0910-18-100-35	0.259	14.62	0.785	0.276	14.88	0.795	0.288	15.05	0.802
30	HIT-HP MVX- 1010-18-100-35	0.263	14.59	0.784	0.281	14.85	0.794	0.292	15.01	0.801
31	HIT-HP MVX- 1210-18-100-35	0.272	14.54	0.782	0.290	14.79	0.792	0.301	14.94	0.798
32	HIT-HP MVX- 1412-18-100-35	0.297	14.32	0.773	0.316	14.53	0.781	0.329	14.66	0.786

① ψ = Linear thermal transmission coefficient in W/(mK)② $\theta_{si,min}$ = Minimum roomsid surface temperature in °C③ f_{Rsi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE



Building Physics

Thermal bridge characteristic values for HIT-SP MVX for monolithic masonry									
Thermal conductivity λ in [W/(mK)]	0.18			0.12			0.08		
Thermal transmission coefficient of standard cross section "External wall" U in W/(m ² K)	0.455			0.311			0.211		
Load range	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③
HIT-SP MVX- 0404-18-100-35	0.132	15.86	0.835	0.142	16.33	0.853	0.147	16.69	0.868
HIT-SP MVX- 0504-18-100-35	0.136	15.83	0.833	0.147	16.30	0.852	0.152	16.64	0.866
HIT-SP MVX- 0604-18-100-35	0.141	15.80	0.832	0.151	16.26	0.850	0.157	16.60	0.864
HIT-SP MVX- 0804-18-100-35	0.149	15.74	0.830	0.160	16.18	0.847	0.166	16.51	0.860
HIT-SP MVX- 0505-18-100-35	0.148	15.71	0.828	0.159	16.15	0.846	0.165	16.48	0.859
HIT-SP MVX- 0705-18-100-35	0.156	15.65	0.826	0.168	16.08	0.843	0.175	16.39	0.856
HIT-SP MVX- 0805-18-100-35	0.161	15.62	0.825	0.172	16.04	0.842	0.179	16.35	0.854
HIT-SP MVX- 0506-18-100-35	0.158	15.59	0.824	0.170	16.02	0.841	0.178	16.32	0.853
HIT-SP MVX- 0606-18-100-35	0.163	15.56	0.823	0.175	15.98	0.839	0.182	16.28	0.851
HIT-SP MVX- 0706-18-100-35	0.167	15.53	0.821	0.180	15.94	0.838	0.187	16.24	0.849
HIT-SP MVX- 0906-18-100-35	0.175	15.48	0.819	0.188	15.87	0.835	0.196	16.16	0.846
HIT-SP MVX- 1006-18-100-35	0.180	15.45	0.818	0.193	15.84	0.834	0.201	16.12	0.845
HIT-SP MVX- 1106-18-100-35	0.184	15.42	0.817	0.197	15.81	0.832	0.205	16.08	0.843
HIT-SP MVX- 0607-18-100-35	0.173	15.45	0.818	0.186	15.85	0.834	0.194	16.13	0.845
HIT-SP MVX- 0707-18-100-35	0.177	15.42	0.817	0.191	15.81	0.833	0.199	16.09	0.844
HIT-SP MVX- 0907-18-100-35	0.186	15.37	0.815	0.199	15.75	0.830	0.208	16.01	0.841
HIT-SP MVX- 1007-18-100-35	0.190	15.34	0.814	0.204	15.71	0.829	0.212	15.98	0.839
HIT-SP MVX- 1107-18-100-35	0.194	15.32	0.813	0.208	15.68	0.827	0.216	15.94	0.838
HIT-SP MVX- 1207-18-100-35	0.198	15.29	0.812	0.212	15.65	0.826	0.221	15.90	0.836
HIT-SP MVX- 1407-18-100-35	0.206	15.24	0.810	0.220	15.59	0.824	0.229	15.84	0.833
HIT-SP MVX- 0408-18-100-35	0.174	15.41	0.816	0.187	15.80	0.832	0.196	16.08	0.843
HIT-SP MVX- 0708-18-100-35	0.187	15.32	0.813	0.201	15.69	0.828	0.210	15.96	0.838
HIT-SP MVX- 0808-18-100-35	0.191	15.29	0.812	0.206	15.66	0.826	0.214	15.92	0.837
HIT-SP MVX- 1008-18-100-35	0.200	15.24	0.810	0.214	15.60	0.824	0.223	15.84	0.834
HIT-SP MVX- 1208-18-100-35	0.208	15.19	0.807	0.222	15.53	0.821	0.232	15.77	0.831
HIT-SP MVX- 1308-18-100-35	0.212	15.16	0.807	0.226	15.50	0.820	0.236	15.74	0.830
HIT-SP MVX- 1309-18-100-35	0.221	15.07	0.803	0.236	15.39	0.816	0.246	15.61	0.825
HIT-SP MVX- 0610-18-100-35	0.201	15.15	0.806	0.216	15.50	0.820	0.226	15.73	0.829
HIT-SP MVX- 0910-18-100-35	0.214	15.07	0.803	0.229	15.40	0.816	0.239	15.63	0.825
HIT-SP MVX- 1010-18-100-35	0.218	15.05	0.802	0.234	15.37	0.815	0.244	15.59	0.824
HIT-SP MVX- 1210-18-100-35	0.226	15.00	0.800	0.242	15.31	0.813	0.252	15.53	0.821
HIT-SP MVX- 1412-18-100-35	0.250	14.78	0.791	0.267	15.06	0.802	0.279	15.24	0.810

① ψ = Linear thermal transmission coefficient in W/(mK)

② $\theta_{si,min}$ = Minimum roomsid surface temperature in °C

③ f_{Rsi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE



1

MVX/-COR

2

MVX-OU/OD

3

ZVX / ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Building Physics

Thermal bridge characteristic values for HIT-HP MVX for masonry with ETICS									
Insulating material thickness in mm (ETICS)	140			220			300		
Thermal transmission coefficient of standard cross section "External wall" U in W/(m ² K)	0.227			0.149			0.111		
Load range	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③
HIT-HP MVX- 0404-18-100-35	0.168	17.80	0.912	0.187	18.08	0.923	0.194	18.25	0.930
HIT-HP MVX- 0504-18-100-35	0.175	17.76	0.910	0.193	18.05	0.922	0.200	18.21	0.929
HIT-HP MVX- 0604-18-100-35	0.181	17.73	0.909	0.199	18.02	0.921	0.206	18.18	0.927
HIT-HP MVX- 0804-18-100-35	0.194	17.66	0.906	0.211	17.95	0.918	0.217	18.12	0.925
HIT-HP MVX- 0505-18-100-35	0.194	17.64	0.906	0.211	17.94	0.918	0.216	18.11	0.924
HIT-HP MVX- 0705-18-100-35	0.207	17.57	0.903	0.223	17.87	0.915	0.228	18.05	0.922
HIT-HP MVX- 0805-18-100-35	0.213	17.54	0.902	0.229	17.84	0.914	0.233	18.02	0.921
HIT-HP MVX- 0506-18-100-35	0.212	17.53	0.901	0.228	17.83	0.913	0.231	18.02	0.921
HIT-HP MVX- 0606-18-100-35	0.219	17.49	0.900	0.234	17.80	0.912	0.237	17.99	0.919
HIT-HP MVX- 0706-18-100-35	0.225	17.46	0.898	0.240	17.77	0.911	0.243	17.96	0.918
HIT-HP MVX- 0906-18-100-35	0.238	17.39	0.896	0.251	17.71	0.908	0.253	17.90	0.916
HIT-HP MVX- 1006-18-100-35	0.244	17.36	0.894	0.257	17.68	0.907	0.258	17.87	0.915
HIT-HP MVX- 1106-18-100-35	0.249	17.33	0.893	0.262	17.65	0.906	0.263	17.85	0.914
HIT-HP MVX- 0607-18-100-35	0.236	17.38	0.895	0.249	17.70	0.908	0.251	17.90	0.916
HIT-HP MVX- 0707-18-100-35	0.243	17.35	0.894	0.255	17.67	0.907	0.257	17.87	0.915
HIT-HP MVX- 0907-18-100-35	0.255	17.29	0.891	0.267	17.61	0.904	0.267	17.81	0.912
HIT-HP MVX- 1007-18-100-35	0.261	17.26	0.890	0.272	17.58	0.903	0.272	17.79	0.911
HIT-HP MVX- 1107-18-100-35	0.267	17.23	0.889	0.278	17.56	0.902	0.277	17.76	0.910
HIT-HP MVX- 1207-18-100-35	0.272	17.20	0.888	0.283	17.53	0.901	0.282	17.73	0.909
HIT-HP MVX- 1407-18-100-35	0.283	17.14	0.886	0.293	17.48	0.899	0.292	17.68	0.907
HIT-HP MVX- 0408-18-100-35	0.239	17.35	0.894	0.252	17.68	0.907	0.253	17.87	0.915
HIT-HP MVX- 0708-18-100-35	0.259	17.25	0.890	0.270	17.58	0.903	0.270	17.79	0.911
HIT-HP MVX- 0808-18-100-35	0.265	17.22	0.889	0.276	17.55	0.902	0.275	17.76	0.910
HIT-HP MVX- 1008-18-100-35	0.277	17.16	0.886	0.287	17.49	0.900	0.285	17.70	0.908
HIT-HP MVX- 1208-18-100-35	0.289	17.10	0.884	0.297	17.44	0.898	0.295	17.65	0.906
HIT-HP MVX- 1308-18-100-35	0.294	17.07	0.883	0.302	17.41	0.897	0.300	17.63	0.905
HIT-HP MVX- 1309-18-100-35	0.309	16.98	0.879	0.316	17.33	0.893	0.312	17.55	0.902
HIT-HP MVX- 0610-18-100-35	0.283	17.09	0.884	0.292	17.44	0.898	0.289	17.66	0.906
HIT-HP MVX- 0910-18-100-35	0.301	17.00	0.880	0.308	17.35	0.894	0.304	17.58	0.903
HIT-HP MVX- 1010-18-100-35	0.307	16.97	0.879	0.314	17.33	0.893	0.309	17.56	0.902
HIT-HP MVX- 1210-18-100-35	0.318	16.92	0.877	0.324	17.28	0.891	0.319	17.51	0.900
HIT-HP MVX- 1412-18-100-35	0.356	16.70	0.868	0.357	17.08	0.883	0.349	17.33	0.893

① ψ = Linear thermal transmission coefficient in W/(mK)② $\theta_{si,min}$ = Minimum roomsid surface temperature in °C③ f_{Rsi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE



Building Physics

Thermal bridge characteristic values for HIT-SP MVX for masonry with ETICS									
Insulating material thickness in mm (ETICS)	140			220			300		
Thermal transmission coefficient of standard cross section "External wall" U in W/(m ² K)	0.227			0.149			0.111		
Load range	ψ ①	$\theta_{si,min}$ ②	f _{RSi} ③	ψ ①	$\theta_{si,min}$ ②	f _{RSi} ③	ψ ①	$\theta_{si,min}$ ②	f _{RSi} ③
HIT-SP MVX- 0404-18-100-35	0.115	18.12	0.925	0.134	18.40	0.936	0.145	18.54	0.942
HIT-SP MVX- 0504-18-100-35	0.121	18.09	0.924	0.140	18.37	0.935	0.150	18.51	0.941
HIT-SP MVX- 0604-18-100-35	0.126	18.06	0.922	0.145	18.34	0.934	0.155	18.48	0.939
HIT-SP MVX- 0804-18-100-35	0.137	18.00	0.920	0.156	18.28	0.931	0.165	18.43	0.937
HIT-SP MVX- 0505-18-100-35	0.137	17.99	0.919	0.155	18.27	0.931	0.164	18.42	0.937
HIT-SP MVX- 0705-18-100-35	0.148	17.92	0.917	0.166	18.21	0.929	0.175	18.37	0.935
HIT-SP MVX- 0805-18-100-35	0.154	17.89	0.916	0.171	18.19	0.927	0.179	18.34	0.934
HIT-SP MVX- 0506-18-100-35	0.153	17.89	0.916	0.170	18.18	0.927	0.178	18.34	0.933
HIT-SP MVX- 0606-18-100-35	0.158	17.86	0.914	0.176	18.15	0.926	0.183	18.31	0.932
HIT-SP MVX- 0706-18-100-35	0.164	17.83	0.913	0.181	18.12	0.925	0.188	18.28	0.931
HIT-SP MVX- 0906-18-100-35	0.175	17.77	0.911	0.191	18.07	0.923	0.198	18.23	0.929
HIT-SP MVX- 1006-18-100-35	0.180	17.74	0.910	0.196	18.04	0.922	0.203	18.20	0.928
HIT-SP MVX- 1106-18-100-35	0.186	17.71	0.908	0.201	18.01	0.921	0.207	18.18	0.927
HIT-SP MVX- 0607-18-100-35	0.174	17.76	0.910	0.190	18.06	0.922	0.196	18.23	0.929
HIT-SP MVX- 0707-18-100-35	0.179	17.73	0.909	0.195	18.03	0.921	0.201	18.20	0.928
HIT-SP MVX- 0907-18-100-35	0.190	17.67	0.907	0.205	17.98	0.919	0.211	18.15	0.926
HIT-SP MVX- 1007-18-100-35	0.196	17.65	0.906	0.210	17.95	0.918	0.215	18.12	0.925
HIT-SP MVX- 1107-18-100-35	0.201	17.62	0.905	0.215	17.93	0.917	0.220	18.10	0.924
HIT-SP MVX- 1207-18-100-35	0.206	17.59	0.904	0.220	17.90	0.916	0.225	18.08	0.923
HIT-SP MVX- 1407-18-100-35	0.216	17.54	0.902	0.229	17.85	0.914	0.233	18.03	0.921
HIT-SP MVX- 0408-18-100-35	0.177	17.73	0.909	0.192	18.04	0.921	0.198	18.21	0.928
HIT-SP MVX- 0708-18-100-35	0.194	17.64	0.906	0.208	17.95	0.918	0.213	18.12	0.925
HIT-SP MVX- 0808-18-100-35	0.199	17.61	0.905	0.214	17.92	0.917	0.218	18.10	0.924
HIT-SP MVX- 1008-18-100-35	0.210	17.56	0.902	0.224	17.87	0.915	0.228	18.05	0.922
HIT-SP MVX- 1208-18-100-35	0.220	17.50	0.900	0.233	17.82	0.913	0.237	18.00	0.920
HIT-SP MVX- 1308-18-100-35	0.226	17.48	0.899	0.238	17.79	0.912	0.241	17.98	0.919
HIT-SP MVX- 1309-18-100-35	0.239	17.39	0.896	0.251	17.72	0.909	0.253	17.90	0.916
HIT-SP MVX- 0610-18-100-35	0.216	17.50	0.900	0.229	17.82	0.913	0.232	18.00	0.920
HIT-SP MVX- 0910-18-100-35	0.232	17.42	0.897	0.244	17.74	0.910	0.246	17.93	0.917
HIT-SP MVX- 1010-18-100-35	0.237	17.39	0.896	0.249	17.71	0.909	0.250	17.91	0.916
HIT-SP MVX- 1210-18-100-35	0.248	17.34	0.893	0.258	17.67	0.907	0.259	17.86	0.914
HIT-SP MVX- 1412-18-100-35	0.283	17.13	0.885	0.290	17.48	0.899	0.288	17.69	0.908

① ψ = Linear thermal transmission coefficient in W/(mK)

② $\theta_{si,min}$ = Minimum roomsid surface temperature in °C

③ f_{RSi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE



1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7


ST / WT

8

Building Physics,
Planning

Building Physics

Thermal values according to Technical Approvals

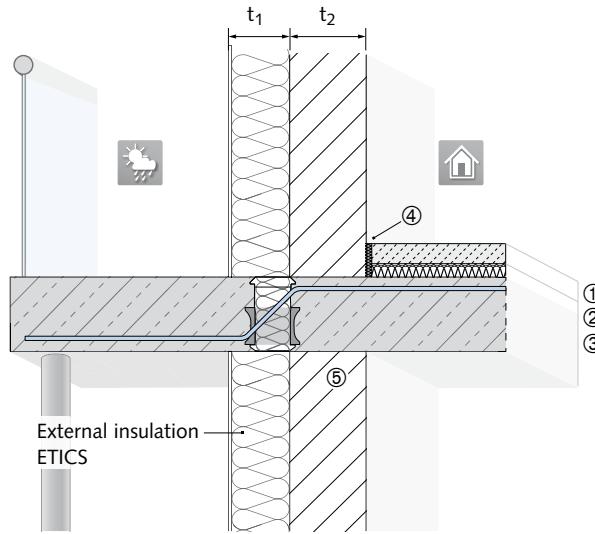

Installation diagram for masonry with ETICS

Standard cross section for thermal transmission coefficient "Exterior wall"

- thermal insulation exterior wall:
thickness $t_1 = 14 \text{ cm}, 22 \text{ cm} \text{ or } 30 \text{ cm}$ ($\lambda = 0.035 \text{ W}/(\text{mK})$)
- exterior (lime-sandstone): thickness $t_2 = 24 \text{ cm}$ ($\lambda = 0.99 \text{ W}/(\text{mK})$)
- floor construction (interior):
 - ① cement screed 5 cm ($\lambda = 1.35 \text{ W}/(\text{mK})$)
 - ② footfall insulation 3 cm ($\lambda = 0.035 \text{ W}/(\text{mK})$)
 - ③ reinforced concrete floor 16 cm or 18 cm ($\lambda = 2.3 \text{ W}/(\text{mK})$)
 - ④ edge insulation strips 1 cm ($\lambda = 0.14 \text{ W}/(\text{mK})$)
 - ⑤ lime-sandstone masonry



Thermal values are valid for the given configuration
and boundary conditions.

The values for the HIT-ZVX are the same as for the HIT-ZV.

Thermal bridge characteristic values for HIT-HP ZVX for masonry with ETICS

Thermal insulation exterior wall / ETICS thickness [mm]	140			220			300		
Thermal transmission coefficient of standard cross section "External wall" U in $\text{W}/(\text{m}^2\text{K})$	0.227			0.149			0.111		
Load range	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③	ψ ①	$\theta_{si,min}$ ②	f_{Rsi} ③
HIT-HP ZVX-0404-16-100-30-06	0.148	17.91	0.916	0.161	18.22	0.929	0.168	18.38	0.935
HIT-HP ZVX-0604-16-100-30-06	0.152	17.85	0.914	0.172	18.09	0.924	0.185	18.19	0.927
HIT-HP ZVX-0804-16-100-30-06	0.157	17.85	0.914	0.183	18.09	0.924	0.201	18.19	0.927
HIT-HP ZVX-0404-16-100-30-08	0.155	17.86	0.914	0.168	18.18	0.927	0.174	18.35	0.934
HIT-HP ZVX-0604-16-100-30-08	0.163	17.76	0.910	0.182	18.01	0.920	0.195	18.10	0.924
HIT-HP ZVX-0804-16-100-30-08	0.171	17.76	0.910	0.197	18.01	0.920	0.215	18.10	0.924
HIT-HP ZVX-0404-18-100-30-10	0.161	17.82	0.913	0.180	18.11	0.924	0.187	18.27	0.931
HIT-HP ZVX-0604-18-100-30-10	0.175	17.65	0.906	0.201	17.86	0.914	0.211	17.99	0.920
HIT-HP ZVX-0804-18-100-30-10	0.190	17.65	0.906	0.222	17.86	0.914	0.235	17.99	0.920
HIT-HP ZVX-0404-18-100-30-12	0.171	17.77	0.911	0.189	18.06	0.922	0.196	18.23	0.929
HIT-HP ZVX-0604-18-100-30-12	0.190	17.56	0.902	0.215	17.78	0.911	0.224	17.91	0.916
HIT-HP ZVX-0804-18-100-30-12	0.209	17.56	0.902	0.240	17.78	0.911	0.253	17.91	0.916
HIT-HP ZVX-0202-16-100-30-06	0.098	18.21	0.928	0.120	18.48	0.939	0.130	18.62	0.945
HIT-HP ZVX-0402-16-100-30-06	0.103	18.17	0.927	0.124	18.45	0.938	0.135	18.59	0.944
HIT-HP ZVX-0602-16-100-30-06	0.108	18.14	0.926	0.129	18.42	0.937	0.139	18.56	0.942
HIT-HP ZVX-0802-16-100-30-06	0.113	18.11	0.925	0.134	18.39	0.936	0.143	18.54	0.941
HIT-HP ZVX-0603-16-100-30-06	0.128	18.02	0.921	0.147	18.30	0.932	0.156	18.46	0.938
HIT-HP ZVX-0803-16-100-30-06	0.133	18.00	0.920	0.152	18.28	0.931	0.160	18.44	0.937

- continue on next page -

① ψ = Linear thermal transmission coefficient in $\text{W}/(\text{mK})$

② $\theta_{si,min}$ = Minimum roomside surface temperature in $^\circ\text{C}$

③ f_{Rsi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION HIGH PERFORMANCE



Building Physics

Thermal bridge characteristic values for HIT-HP ZVX for masonry with ETICS – continued from previous page									
Thermal insulation exterior wall / ETICS thickness [mm]	140			220			300		
Thermal transmission coefficient of standard cross section "External wall" U in W/(m²K)	0.227			0.149			0.111		
Load range	ψ ①	θ _{si,min} ②	f _{RSi} ③	ψ ①	θ _{si,min} ②	f _{RSi} ③	ψ ①	θ _{si,min} ②	f _{RSi} ③
HIT-HP ZVX-0202-16-100-30-08	0.102	18.18	0.927	0.123	18.45	0.938	0.133	18.60	0.944
HIT-HP ZVX-0402-16-100-30-08	0.111	18.13	0.925	0.131	18.40	0.936	0.141	18.55	0.942
HIT-HP ZVX-0602-16-100-30-08	0.119	18.07	0.923	0.139	18.35	0.934	0.148	18.50	0.940
HIT-HP ZVX-0802-16-100-30-08	0.128	18.02	0.921	0.147	18.31	0.932	0.156	18.46	0.938
HIT-HP ZVX-0603-16-100-30-08	0.139	17.96	0.918	0.158	18.24	0.930	0.165	18.40	0.936
HIT-HP ZVX-0803-16-100-30-08	0.147	17.91	0.916	0.165	18.20	0.928	0.172	18.36	0.934
HIT-HP ZVX-0402-18-100-30-10	0.123	18.05	0.922	0.145	18.32	0.933	0.155	18.47	0.939
HIT-HP ZVX-0602-18-100-30-10	0.136	17.97	0.919	0.156	18.25	0.930	0.166	18.40	0.936
HIT-HP ZVX-0802-18-100-30-10	0.148	17.90	0.916	0.169	18.18	0.927	0.177	18.34	0.933
HIT-HP ZVX-0603-18-100-30-10	0.155	17.86	0.914	0.174	18.14	0.926	0.182	18.30	0.932
HIT-HP ZVX-0803-18-100-30-10	0.167	17.79	0.912	0.186	18.08	0.923	0.193	18.24	0.930
HIT-HP ZVX-0402-18-100-30-12	0.133	18.01	0.920	0.154	18.28	0.931	0.164	18.43	0.937
HIT-HP ZVX-0602-18-100-30-12	0.151	17.90	0.916	0.170	18.17	0.927	0.179	18.33	0.933
HIT-HP ZVX-0802-18-100-30-12	0.168	17.81	0.912	0.186	18.09	0.924	0.193	18.26	0.930
HIT-HP ZVX-0603-18-100-30-12	0.169	17.80	0.912	0.187	18.08	0.923	0.194	18.25	0.930
HIT-HP ZVX-0803-18-100-30-12	0.185	17.70	0.908	0.203	18.00	0.920	0.208	18.17	0.927

① ψ = Linear thermal transmission coefficient in W/(mK)

② θ_{si,min} = Minimum roomside surface temperature in °C

③ f_{RSi} = Temperature factor in [-]

Thermal bridge characteristic values for HIT-SP ZVX for masonry with ETICS									
Thermal insulation exterior wall / ETICS thickness [mm]	140			220			300		
Thermal transmission coefficient of standard cross section "External wall" U in W/(m²K)	0.227			0.149			0.111		
Load range	ψ ①	θ _{si,min} ②	f _{RSi} ③	ψ ①	θ _{si,min} ②	f _{RSi} ③	ψ ①	θ _{si,min} ②	f _{RSi} ③
HIT-SP ZVX-0404-16-100-30-06	0.095	18.23	0.929	0.120	18.47	0.939	0.137	18.58	0.943
HIT-SP ZVX-0604-16-100-30-06	0.099	18.18	0.927	0.124	18.42	0.937	0.143	18.51	0.940
HIT-SP ZVX-0804-16-100-30-06	0.103	18.18	0.927	0.128	18.42	0.937	0.149	18.51	0.940
HIT-SP ZVX-0404-16-100-30-08	0.101	18.19	0.928	0.127	18.43	0.937	0.144	18.54	0.941
HIT-SP ZVX-0604-16-100-30-08	0.108	18.11	0.924	0.134	18.35	0.934	0.153	18.43	0.937
HIT-SP ZVX-0804-16-100-30-08	0.115	18.11	0.924	0.141	18.35	0.934	0.162	18.43	0.937

- continue on next page -

① ψ = Linear thermal transmission coefficient in W/(mK)

② θ_{si,min} = Minimum roomside surface temperature in °C

③ f_{RSi} = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION SUPERIOR PERFORMANCE



1

MVX/-COR

2

MVX-OU/OD

3

ZVX / ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Building Physics

Thermal bridge characteristic values for HIT-SP ZVX for masonry using ETICS – continued from previous page									
	Thermal insulation exterior wall / ETICS thickness [mm]	140		220		300			
2	Thermal transmission coefficient of standard cross section "External wall" U in W/(m ² K)	0.227		0.149		0.111			
3	Load range	ψ ①	θ _{si,min} ②	f _{Rs} i ③	ψ ①	θ _{si,min} ②	f _{Rs} i ③	ψ ①	θ _{si,min} ②
4	HIT-SP ZVX-0404-18-100-30-10	0.109	18.14	0.926	0.136	18.38	0.935	0.153	18.48
5	HIT-SP ZVX-0604-18-100-30-10	0.119	18.02	0.921	0.142	18.31	0.932	0.165	18.34
6	HIT-SP ZVX-0804-18-100-30-10	0.129	18.02	0.921	0.148	18.31	0.932	0.177	18.34
7	HIT-SP ZVX-0404-18-100-30-12	0.117	18.10	0.924	0.145	18.33	0.933	0.163	18.43
8	HIT-SP ZVX-0604-18-100-30-12	0.132	17.94	0.918	0.155	18.23	0.929	0.180	18.25
	HIT-SP ZVX-0804-18-100-30-12	0.147	17.94	0.918	0.165	18.23	0.929	0.196	18.25
	HIT-SP ZVX-0202-16-100-30-06	0.058	18.45	0.938	0.079	18.73	0.949	0.091	18.86
	HIT-SP ZVX-0402-16-100-30-06	0.063	18.43	0.937	0.083	18.70	0.948	0.095	18.84
	HIT-SP ZVX-0602-16-100-30-06	0.067	18.40	0.936	0.087	18.68	0.947	0.099	18.81
	HIT-SP ZVX-0802-16-100-30-06	0.071	18.38	0.935	0.091	18.65	0.946	0.103	18.79
	HIT-SP ZVX-0603-16-100-30-06	0.084	18.30	0.932	0.103	18.58	0.943	0.114	18.72
	HIT-SP ZVX-0803-16-100-30-06	0.088	18.28	0.931	0.107	18.56	0.942	0.117	18.70
	HIT-SP ZVX-0202-16-100-30-08	0.062	18.43	0.937	0.082	18.71	0.948	0.094	18.84
	HIT-SP ZVX-0402-16-100-30-08	0.069	18.39	0.936	0.089	18.67	0.947	0.101	18.80
	HIT-SP ZVX-0602-16-100-30-08	0.076	18.34	0.934	0.096	18.62	0.945	0.107	18.76
	HIT-SP ZVX-0802-16-100-30-08	0.084	18.30	0.932	0.103	18.58	0.943	0.114	18.72
	HIT-SP ZVX-0603-16-100-30-08	0.093	18.24	0.930	0.112	18.53	0.941	0.122	18.67
	HIT-SP ZVX-0803-16-100-30-08	0.100	18.20	0.928	0.118	18.49	0.940	0.128	18.63
	HIT-SP ZVX-0402-18-100-30-10	0.078	18.33	0.933	0.099	18.61	0.944	0.111	18.74
	HIT-SP ZVX-0602-18-100-30-10	0.088	18.26	0.930	0.109	18.54	0.941	0.121	18.67
	HIT-SP ZVX-0802-18-100-30-10	0.099	18.20	0.928	0.120	18.48	0.939	0.131	18.62
	HIT-SP ZVX-0603-18-100-30-10	0.105	18.17	0.927	0.125	18.45	0.938	0.135	18.59
	HIT-SP ZVX-0803-18-100-30-10	0.115	18.11	0.924	0.135	18.39	0.935	0.145	18.53
	HIT-SP ZVX-0402-18-100-30-12	0.087	18.29	0.931	0.108	18.56	0.942	0.119	18.69
	HIT-SP ZVX-0602-18-100-30-12	0.101	18.20	0.928	0.122	18.47	0.939	0.133	18.61
	HIT-SP ZVX-0802-18-100-30-12	0.117	18.12	0.925	0.136	18.40	0.936	0.146	18.54
	HIT-SP ZVX-0603-18-100-30-12	0.118	18.11	0.924	0.137	18.38	0.935	0.147	18.53
	HIT-SP ZVX-0803-18-100-30-12	0.132	18.02	0.921	0.151	18.31	0.932	0.160	18.46

① ψ = Linear thermal transmission coefficient in W/(mK)

② θ_{si,min} = Minimum roomsidesurface temperature in °C

③ f_{Rs}i = Temperature factor in [-]

HALFEN HIT INSULATED CONNECTION HIGH & SUPERIOR PERFORMANCE

Building Physics

Certificates by the Passive House Institute – Low Energy Component

The Passive House Standard sets very high standards – on the thermal insulation of the building envelope as well as on the individual components.

HALFEN HIT Insulated connections with an insulation thickness from 80 mm are certified by the Passive House Institute as a "Low Energy Component" in the category balcony connection.



The following criteria were used in awarding this certificate

- **Efficiency Criterion**

In two typical applications (a terrace-house and an apartment) the construction fulfills the requirement of:

$$\Delta U_{WB} < 0.025 \text{ W}/(\text{m}^2\text{K})$$

- **Comfort Criterion**

The inner surface must be warm enough to prevent mould and uncomfortable down-draught and radiation losses:

$$\theta_{i,min} > 17.00 \text{ } ^\circ\text{C}$$

Low Energy Component HIT-HP MVX

Insulation thickness 80 mm for cantilevered balcony slabs	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-HP MVX- 0404-18-100-35	180	0.20
HIT-HP MVX- 0504-18-100-35	180	0.21
HIT-HP MVX- 0506-18-100-35	180	0.25
HIT-HP MVX- 0804-18-100-35	180	0.23
HIT-HP MVX- 0404-24-100-35	240	0.22
HIT-HP MVX- 0504-24-100-35	240	0.23

Low Energy Component HIT-SP MVX

Insulation thickness 120 mm for cantilevered balcony slabs	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-SP MVX- 0202-18-100-35	180	0.109
HIT-SP MVX- 0404-18-100-35	180	0.167
HIT-SP MVX- 0504-18-100-35	180	0.16
HIT-SP MVX- 0705-18-100-35	180	0.19
HIT-SP MVX- 0804-18-100-35	180	0.17
HIT-SP MVX- 0907-18-100-35	180	0.22
HIT-SP MVX- 1006-18-100-35	180	0.21
HIT-SP MVX- 1008-18-100-35	180	0.24
HIT-SP MVX- 1107-18-100-35	180	0.24
HIT-SP MVX- 1208-18-100-35	180	0.25
HIT-SP MVX- 0202-22-100-35	220	0.113
HIT-SP MVX- 0404-22-100-35	220	0.173
HIT-SP MVX- 0504-22-100-35	220	0.17
HIT-SP MVX- 0705-22-100-35	220	0.20
HIT-SP MVX- 0804-22-100-35	220	0.18
HIT-SP MVX- 0202-24-100-35	240	0.115
HIT-SP MVX- 0404-24-100-35	240	0.175
HIT-SP MVX- 0504-24-100-35	240	0.17
HIT-SP MVX- 0705-24-100-35	240	0.20
HIT-SP MVX- 0804-24-100-35	240	0.18
HIT-SP MVX- 0907-24-100-35	240	0.24
HIT-SP MVX- 1006-24-100-35	240	0.23
HIT-SP MVX- 1008-24-100-35	240	0.25
HIT-SP MVX- 1107-24-100-35	240	0.25

Low Energy Component HIT-SP MVX-OD

Insulation thickness 120 mm for cantilevered balcony slabs with downward height offset	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-SP MVX-0504-18-100-35-OD	180	0.175
HIT-SP MVX-0504-22-100-35-OD	220	0.179
HIT-SP MVX-0504-24-100-35-OD	240	0.182

Low Energy Component HIT-SP MVX-OU

Insulation thickness 120 mm for cantilevered balcony slabs with upward height offset	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-SP MVX-0504-18-100-35-OU	180	0.170
HIT-SP MVX-0504-22-100-35-OU	220	0.178
HIT-SP MVX-0504-24-100-35-OU	240	0.180

HALFEN HIT INSULATED CONNECTION

1

MVX/-COR

Building Physics

Low Energy Component HIT-HP ZVX		
Insulation thickness 80 mm for simply-supported balcony slabs on columns	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-HP ZVX-0404-18-100-30-06	180	0.18
HIT-HP ZVX-0804-18-100-30-08	180	0.20
HIT-HP ZVX-0404-24-100-30-06	240	0.20
HIT-HP ZVX-0804-24-100-30-08	240	0.21

2

MVX-OU/OI

3

ZVX / ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Low Energy Component HIT-SP ZVX		
Insulation thickness 120 mm for simply-supported balcony slabs on columns	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-SP ZVX-0302-18-100-30-08	180	0.11
HIT-SP ZVX-0404-18-100-30-06	180	0.14
HIT-SP ZVX-0804-18-100-30-08	180	0.15
HIT-SP ZVX-0502-22-100-30-06	220	0.109
HIT-SP ZVX-0202-24-100-30-08	240	0.109
HIT-SP ZVX-0302-24-100-30-06	240	0.108
HIT-SP ZVX-0302-24-100-30-08	240	0.11
HIT-SP ZVX-0502-24-100-30-06	240	0.109
HIT-SP ZVX-0404-24-100-30-06	240	0.14
HIT-SP ZVX-0804-24-100-30-08	240	0.16

Certificates by the Passive House Institute – Certified Passive House Component

In the higher category "Certified Passive House Component" which applies for cool, temperate climate HALFEN Balcony connections are certified for slab thicknesses from 160 mm.



The following criteria were used in awarding this certificate

• Efficiency Criterion

In two typical applications (a terrace-house and an apartment) the construction fulfills the requirement of:

$$\Delta U_{WB} < 0.01 \text{ W}/(\text{m}^2\text{K})$$

• Comfort Criterion

The inner surface must be warm enough to prevent mould and uncomfortable down-draught and radiation losses:

$$\theta_{i,min} > 17.00 \text{ } ^\circ\text{C}$$

Certified Passive House Component / HIT-SP ZVX

Insulation thickness 120 mm for simply-supported balcony slabs on columns	Slab thickness [mm]	Thermal transmission coefficient ψ [W/(mK)]
HIT-SP ZVX-0202-16-100-30-06	160	0.096
HIT-SP ZVX-0202-16-100-30-08	160	0.099
HIT-SP ZVX-0302-16-100-30-06	160	0.098
HIT-SP ZVX-0502-16-100-30-06	160	0.102
HIT-SP ZVX-0202-18-100-30-06	180	0.096
HIT-SP ZVX-0202-18-100-30-08	180	0.101
HIT-SP ZVX-0302-18-100-30-06	180	0.102
HIT-SP ZVX-0502-18-100-30-06	180	0.107
HIT-SP ZVX-0202-22-100-30-06	220	0.104
HIT-SP ZVX-0202-22-100-30-08	220	0.105
HIT-SP ZVX-0302-22-100-30-06	220	0.106
HIT-SP ZVX-0202-24-100-30-06	240	0.104

HALFEN HIT INSULATED CONNECTION

Building Physics

Soundproofing according to DIN 4109

Soundproofing Requirements

With balconies and access balconies, vibration is transferred into the main structure of the building and distributed into adjacent rooms as airborne sound. DIN 4109 specifies the maximum level of the airborne sound pressure level $L'_{n,W}$ which penetrates the adjacent units of the building and which is measured with a standardised tapping machine. For access balconies in multi-storey buildings with residential and business units, the current version of DIN 4109 published in 1989 specifies as follows:

req. $L'_{n,W} = 53 \text{ dB}$ (req. TSM = 10 dB)

The impact sound transmission from the balcony into the adjacent units can be significantly reduced by using thermally separated balcony connections.

In DIN 4109 there is no requirement defining the necessary sound-proofing insulation for balconies. This more than 20-year-old norm is out of date and does not represent current technology.

Under special boundary conditions the standard versions of HALFEN HIT Insulated connections can fulfil the sound insulation requirements for access balconies.

The sound insulation properties of different elements were examined in independent on-site measurement and in measurements done in the MFPA Braunschweig laboratory.



Standardised tapping machine according to EN ISO 10140



Test setup according to EN ISO 10140 with built-in element

Laboratory measurements of impact sound

In laboratory measurements, the difference in the impact sound pressure level ΔL was examined on a balcony slab made with HIT Elements in comparison to a continuous floor slab. The table shows the detected values for different load ranges.

For the first time, the difference in sound impact levels in slab connections are included in a building authority approval; they are included in the European Technical Approval, number ETA-13/0546.

The HALFEN Insulated connections HIT-HP and HIT-SP have the advantage that with the required, mandatory fire protection the necessary sound insulation is also ensured.

Differences in impact sound pressure level ΔL in dB resulting from laboratory measurements	
HIT Element ...MVX	Difference in impact sound pressure level
HIT-HP MVX-0504-18-100-35	12 dB
HIT-HP MVX-0705-18-100-35	11 dB
HIT-HP MVX-1207-18-100-35	11 dB
HIT-SP MVX-0504-18-100-35	14 dB
HIT-SP MVX-0705-18-100-35	15 dB
HIT-SP MVX-1208-18-100-35	10 dB
HIT Element ...ZVX*	Difference in impact sound pressure level
HIT-HP ZVX-0504-18-100-30-12	12 dB
HIT-HP ZVX-0705-18-100-30-12	11 dB
HIT-HP ZVX-1207-18-100-30-12	11 dB
HIT-SP ZVX-0504-18-100-30-12	14 dB
HIT-SP ZVX-0705-18-100-30-12	15 dB
HIT-SP ZVX-1208-18-100-30-12	10 dB

* Values from HIT MVX are transferred for HIT ZVX.
This is a very conservative assumption.

HALFEN HIT INSULATED CONNECTION

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD

5

HT / EQ

6

AT / FT / OTX / FK

7

ST / WT

8

Building Physics,
Planning

Building Physics

Fire protection according to EN 13501 and DIN 4102

All significant requirements concerning fire protection are laid down in the respective Building Regulations of the Federal States or in the relevant Master Building Regulations.

The components in close contact to the HALFEN Insulated connections HIT-HP or HIT-SP must also meet the requirements of the respective fire resistance class according to EN 13501-02 or DIN 4102-2 including DIN 4102-22 in order to fully exploit the fire protection classification of the connection.


The standard versions of the connecting units HIT-HP and HIT-SP are classified in class REI 120 according to EN 13501-02 as well as in class F 120-AB according to DIN 4102 in compliance with the European Technical Approval ETA-13/0546 and the National Technical Approvals Z-15.7-293, Z-15.7-309 and Z-15.7-312.

This is possible due to the special shape of the insulating body in combination with the use of high-quality non-flammable mineral wool, Building Material Class A1 and Euro Class A1, respectively.

The structure prevents flashover on the element sides as the insulating wool encloses the load bearing elements (CSB, shear bars and tension bars) from all sides.

Meaning of the abbreviation REI:

- R** The structural safety of the connection is ensured for the specified duration.
 - E** The room separation effect for the connection is ensured for the specified period.
 - I** The thermal insulating property of the connection is ensured for the specified duration.
- 120** The functions above mentioned are ensured for 120 minutes of fire exposure in compliance with the standard time/temperature curve.

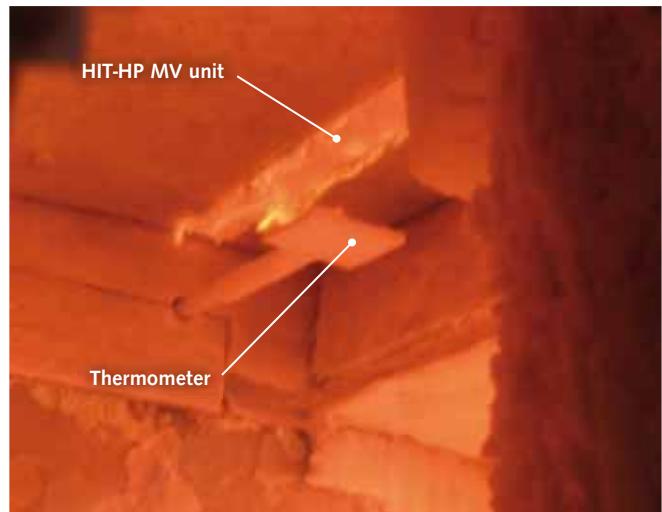

View into the fire test chamber during the HIT-HP MV fire-test after 120 minutes of exposure

The compliance with requirements concerning fire protection of any adjoining structural elements must be verified by the engineer.

Advantages

The advantages of the new connection element in comparison to the elements used in conventional construction methods with polystyrene and fire boards are obvious:

- no confusion of the standard and F 90 versions
- selecting a fire-resistant element doesn't compromise heat insulation efficiency.
- no damage to the load bearing elements caused by flashover on the sides as the fire-resistant insulating wool encloses the load bearing elements from all sides
- protection against weathering

HALFEN HIT INSULATED CONNECTION

HIT Software

Innovations and advantages

The up-dated version of the HIT-Software for calculation of HIT Insulated connections is a development of previous versions, which has been optimized and enhanced with essential functions.

The HIT design software allows you to plan verifiable balconies with these ten key advantages:

- free download available
- intuitive and easy to use
- enhanced load and support options
- verifiable static printouts
- generates .dxf-files output for input to drawing, if required
- item-list compilation to facilitate ordering
- variable GUI using the current Windows design, fully customizable to your needs
- output of internal force progression for each load case
- option to select a variety of international standard
- numerous different language options available




Only three steps required to complete a parts list for enquiries and orders

Step 1: Easy and intuitive input of the initial parameters

HALFEN offers a wide selection of balcony types:

- cantilever balcony (see example on the right)
- cantilever balcony with column
- loggia
- outside corner balcony
- outside corner balcony with column
- inside corner balcony
- inside corner balcony with column
- height offset balcony

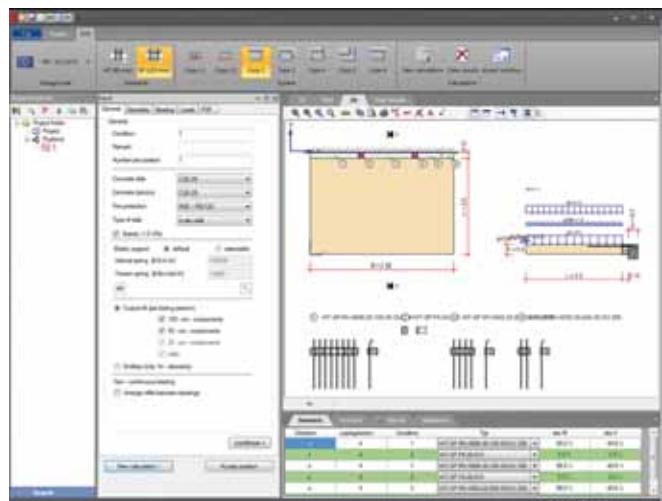

1

MVX/-COR

2

MVX-OU/OD

3

ZVX/ZDX

4

DD / HT / EQ

5

AT / FT / OTX / FK

6

ST / WT

7

Building Physics,
Planning

HALFEN HIT INSULATED CONNECTION


HIT Software

Step 2: Output of verifiable structural calculations

The HIT design program uses the geometry of the balcony and the constraints for concrete cover and concrete strength to select the appropriate HIT Elements.

If required, the results can be printed out as a verifiable structural calculation. Printouts can be a compact version or in greater detail including all analysed load cases and combinations, the distortion results, as well as graphic illustrations.

The significantly improved graphic output capabilities of the new HIT software can include not only the basic geometry of the balcony but also a detailed top view and diagram illustrating the HALFEN HIT Insulated connections, the loads and the necessary connecting reinforcement.

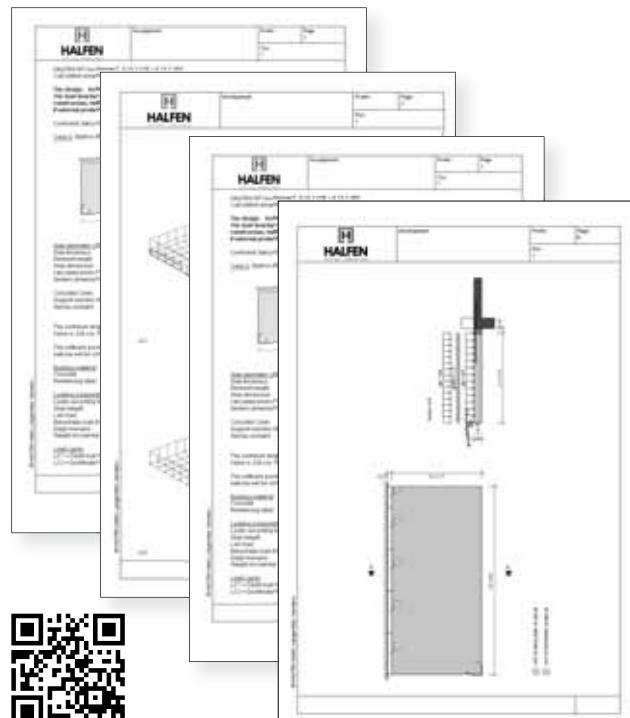

Step 3: Parts lists printout

To simplify enquiry and the order process the HIT software can generate the following parts lists:

- parts list showing all individual balcony units (example on the right)
- parts listed as HIT types

HALFEN HIT Insulated connection Parts List				
HIT Design Software				
Project: Multifamily Building, Central Street				
Created by: Mr. Builder				
Company: ABC				
Position	Article number	Catalogue No.	Number of balconies	per item
1	HIT-SP MV-0704-22-100-30		4	4
1	HIT-SP MV-0402-22-050-30		4	1
2	HIT-SP MV-0804-22-100-30		2	6

Conclusion

The user-friendly, tried and tested HALFEN Software is now available in a new design. The program allows intuitive operation and easy input of parameter for numerous balcony support application. HALFEN provides the planner with a software with absolute reliability in designing and dimensioning balcony connections.

The software calculates building authority approved HIT Elements. All verifications required in accordance with approvals ETA-13/0546, Z-15.7-293, Z-15.7-309 or Z-15.7-312 are also available – in keeping with HALFEN's integral safety concept that no further approvals need to be acquired by planners when using any HALFEN HIT Insulated connections.

Micro FE by mbAEC Software

- Integration of HIT Elements into the powerful FE System especially for the building industry



CONTACT HALFEN WORLDWIDE

HALFEN is represented by subsidiaries in the following 14 countries, please contact us:

Austria	HALFEN Gesellschaft m.b.H. Leonard-Bernstein-Str. 10 1220 Wien	Phone: +43-1-259 6770 E-Mail: office@halfen.at Internet: www.halfen.at	Fax: +43-1-259-677099
Belgium / Luxembourg	HALFEN N.V. Borkelstraat 131 2900 Schoten	Phone: +32-3-658 07 20 E-Mail: info@halfen.be Internet: www.halfen.be	Fax: +32-3-658 15 33
China	HALFEN Construction Accessories Distribution Co.Ltd. Room 601 Tower D, Vantone Centre No. A6 Chao Yang Men Wai Street Chaoyang District Beijing · P.R. China 100020	Phone: +86-10 5907 3200 E-Mail: info@halfen.cn Internet: www.halfen.cn	Fax: +86-10 5907 3218
Czech Republic	HALFEN s.r.o. Business Center Šafránkova Šafránkova 1238/1 155 00 Praha 5	Phone: +420-311-690 060 E-Mail: info@halfen-deha.cz Internet: www.halfen-deha.cz	Fax: +420-235-314 308
France	HALFEN S.A.S. 18, rue Goubet 75019 Paris	Phone: +33-1- 44523100 E-Mail: halfen@halfen.fr Internet: www.halfen.fr	Fax: +33-1-44523152
Germany	HALFEN Vertriebsgesellschaft mbH Liebigstr. 14 40764 Langenfeld	Phone: +49-2173-970-0 E-Mail: info@halfen.de Internet: www.halfen.de	Fax: +49-2173-970 225
Italy	HALFEN S.r.l. Soc. Unipersonale Via F.Illi Bronzetti N° 28 24124 Bergamo	Phone: +39-035-0760711 E-Mail: tecnico@halfen.it Internet: www.halfen.it	Fax: +39-035-0760799
Netherlands	HALFEN b.v. Oostermaat 3 7623 CS Borne	Phone: +31-74-267 14 49 E-Mail: info@halfen.nl Internet: www.halfen.nl	Fax: +31-74-267 26 59
Norway	HALFEN AS Postboks 2080 4095 Stavanger	Phone: +47-51 82 34 00 E-Mail: post@halfen.no Internet: www.halfen.no	Fax: +47-51 82 34 01
Poland	HALFEN Sp. z o.o. Ul. Obornicka 287 60-691 Poznan	Phone: +48-61-622 14 14 E-Mail: info@halfen.pl Internet: www.halfen.pl	Fax: +48-61-622 14 15
Sweden	Halfen AB Vädursgatan 5 412 50 Göteborg	Phone: +46-31-98 58 00 E-Mail: info@halfen.se Internet: www.halfen.se	Fax: +46-31-98 58 01
Switzerland	HALFEN Swiss AG Hertistrasse 25 8304 Wallisellen	Phone: +41-44-849 78 78 E-Mail: info@halfen.ch Internet: www.halfen.ch	Fax: +41-44-849 78 79
United Kingdom / Ireland	HALFEN Ltd. A1/A2 Portland Close Houghton Regis LU5 5AW	Phone: +44 -1582- 47 03 00 E-Mail: info@halfen.co.uk Internet: www.halfen.co.uk	Fax: +44-1582-470304
United States of America	HALFEN USA Inc. 8521 FM 1976 P.O. Box 547 Converse, TX 78109	Phone: +1 800.423.91 40 E-Mail: info@halfenusa.com Internet: www.halfenusa.com	Fax: +1 877.683.4910
For countries not listed HALFEN International	HALFEN International GmbH Liebigstr. 14 40764 Langenfeld / Germany	Phone: +49 -2173-970-0 E-Mail: info@halfen.com Internet: www.halfen.com	Fax: +49 -2173-970-849

Furthermore HALFEN is represented with sales offices and distributors worldwide. Please contact us: www.halfen.com

NOTES REGARDING THIS CATALOGUE

Technical and design changes reserved. The information in this publication is based on state-of-the-art technology at the time of publication. We reserve the right to make technical and design changes at any time. HALFEN GmbH shall not accept liability for the accuracy of the information in this publication or for any printing errors.

The Quality Management System of Halfen GmbH is certified for the locations in Germany, France, the Netherlands, Austria, Poland, Switzerland and the Czech Republic according to **DIN EN ISO 9001:2015**, Certificate No. QS-281 HH.





For further information please contact: www.halfen.com