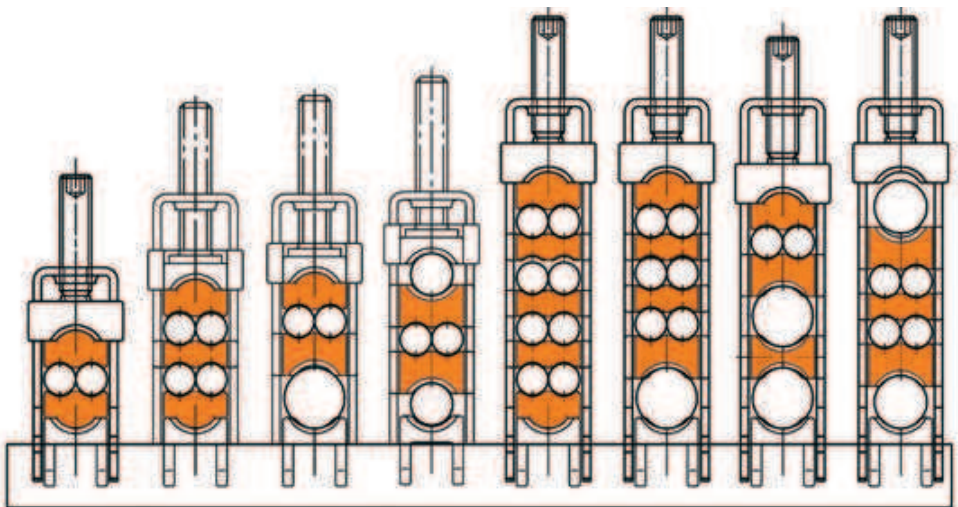


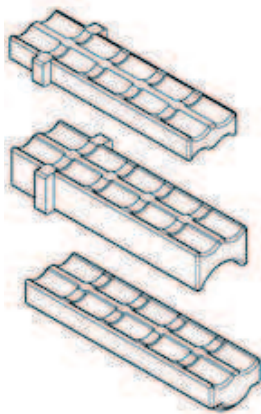
Multi-Clamps

The proven Chainfix-clamps now even more versatily. New parts offer numberless solutions to assemble.

- New universal strain relief
- Save assembly time and space
- Compact and modular
- For small outer diameters
- Cost-effective



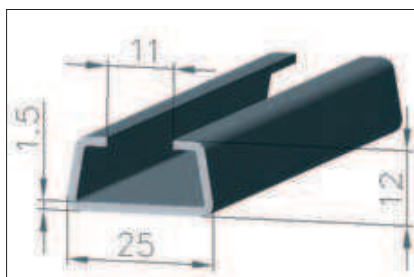
CFX12.1.Z1 CFX12.2.Z1 CFX12.2.Z2 CFX12.2.Z3 CFX12.3.Z1 CFX12.3.Z2 CFX12.3.Z3 CFX12.3.Z4

New universal
saddle clamps

Part No. Version	Part No. trays as single parts				For cables Ø max. [mm]
	CDA.4/4-8	CD.4/4	CD.4/4-8	CD.12	
CFX12.1.Z1	X (2-piece)	-	-	-	6
CFX12.2.Z1	X (2-piece)	X (1-piece)	-	-	6
CFX12.2.Z2	X (1-piece)	-	X (1-piece)	-	6 + 12
CFX12.2.Z3	-	-	X (2-piece)	-	6 + 8
CFX12.3.Z1	X (2-piece)	X (3-piece)	-	-	6
CFX12.3.Z2	X (1-piece)	X (2-piece)	X (1-piece)	-	6 + 12
CFX12.3.Z3	X (1-piece)	-	X (1-piece)	X (1-piece)	6 + 12
CFX12.3.Z4	-	X (1-piece)	X (2-piece)	-	6 + 10

For stainless-steel version please insert index **[.E]** Part No. CFX.12.3.Z1.E

Standard material steel zinc-coated

**C-profile for clamps and KMA-mounting brackets**

Stainless steel C-profile for all clamps, also for assembly in the KMA connection element Series E4.32, 280, 2828, E4.42, 380, 3838, E4.56, 400, 4040, 14040, 14240, E4.80, 5050, 15050 Part No. CF.92.42. [XX] (XX - specify length in mm). For stainless-steel version please insert **[.E]** Part No. CF.92.42. [XX] [.E] - Standard material steel zinc-coated.

Tolerance of C-profile lengths -5 mm possible



Available from stock. **Delivery in 24h or today!** (Delivery time means time until shipping of goods)