

平皮带用惰轮 宽度L=25~100型 / 轴承拆卸型

选型指南

标准	举例	型号	- d -	L -	H -	X -	Y -	Z	型号	- L
	Code	D							Code	D
	PD18AM	40	10	L50	H0.3				PD22GB	20 - 38
	PD20AM	40	10	L50		X10	Y8	Z5	PD22S	30A - 38


- ◆材 质: 铝合金
- ◆表面处理: 本色阳极氧化处理
- ◆轴承精度: JIS B1514 0级

注: 轴承采用压入方式, 无法拆卸


■轴承压入型




●直杆型 PD18AM (不带法兰)




PD21AM (带法兰)



●带肋槽直柱型 PD20AM

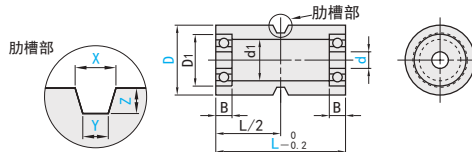


●圆弧型 PD19AM



型号		d	L 指定单位1mm	仅带肋槽直柱型 指定单位0.1mm			仅圆弧型 可选	d <sub>1</sub>	轴承尺寸			Fa																																			
Code	D			X	Y	Z			H	No.	D <sub>1</sub>		B																																		
直杆型 PD18AM PD21AM	15	*5	直柱型 圆弧型 25~100	-	-	-	-	7	675ZZ	8	2.5	-																																			
		*6						9	676ZZ	10	3																																				
	20	*6						10	686ZZ	13	5		-																																		
		*8						10	678ZZ	12	3.5																																				
	25	6						带肋槽直柱型 50~100	7.0~15.0	5.0~12.0	-		-	-	10	696ZZ	15	5	26																												
		*8													10	688ZZ	16			5																											
	30	8													L ≥ B × 2 + 2	-	-	-		-	-	15	698ZZ	19	6	31																					
		*10																				15	6900ZZ	22			6																				
	35	*12																				-	-	-	-		-	-	17	6901ZZ	24	6	36														
		10																											17	6900ZZ	22			6													
	40	*15																											-	-	-	-		-	-	17	6901ZZ	24	7	41							
		8																																		17	6902ZZ	28			7						
圆弧型 PD19AM	10	-	-	-	-	-	-					17																								628ZZ	24	8	51								
	10											17																								6000ZZ	26				8						
带肋槽直柱型 PD20AM	12											-																								-	-	-			-	-	17	6901ZZ	24	6	41
	15																																										17	6902ZZ	28		
20	*20							-	-	-	-		-	-					22																								6804ZZ	32	7	51	
	10																		22																								6200ZZ	30			
60	12														-	-	-	-	-	-	22					6001ZZ																	28	8	61		
	15																				22					6002ZZ																	32				
80	15																				-	-	-	-	-	-	17	6902ZZ					28										7	51			
	20																										17	6904ZZ					37														
25	*25																										-	-	-	-	-	-	22	6905ZZ	42					9			61				
	12																																22	6201ZZ	32												
30	15	-	-	-	-	-	-																										22	6002ZZ	32				9	61							
	20																																22	6904ZZ	37												
35	25											-																					-	-	-	-	-	32	6905ZZ		42	9					61
	30																																					32	6906ZZ		47						
25	30							-	-	-	-		-	-																								41	6205ZZ		52	15				81	
	30																																					41	6006ZZ		55						
30	35														-	-	-	-	-	-																		41	6907ZZ		55	10			81		
	35																																					41	6907ZZ		55						

注: d中带\*尺寸仅用于无法兰型

■轴承拆卸型

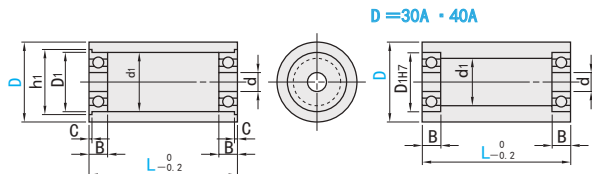

Code	材质	表面处理	材质 轴承
PD22GB PD22CN	S45C	四氧化三铁保护膜 无电解镀镍	钢
PD22AM PD22S	铝合金 SUS304	本色阳极氧化处理 -	不锈钢

◆轴承精度JIS B1514 0级

型号		L 选择					d	d <sub>1</sub>	轴承尺寸				
Code	D					No.			D <sub>1</sub>	B	C	h <sub>1</sub>	
PD22GB PD22CN	20	38	45	50		6	15	F696ZZ	15	5	1.2	17	
	25	38	45	50	60								
PD22AM PD22S	30	38	45	50	60 70	8	17	F606ZZ × 2	17	6	-	19	
	30A	38	45	50	60 70								
35	38	45	50	60 70 85 90	22	22	F608ZZ × 2	22	7	1.5	25		
	40	38	45	50 60 70 85 90									
40A	38	45	50 60 70 85 90	10	22	6000ZZ	26	8	-	-			