


For new constructions:
Series "E4 light"
14040/14140/R18840 ▶ page 7.130

Series 140 · 141 · R188 "E4/light"



igus® E-ChainSystems®

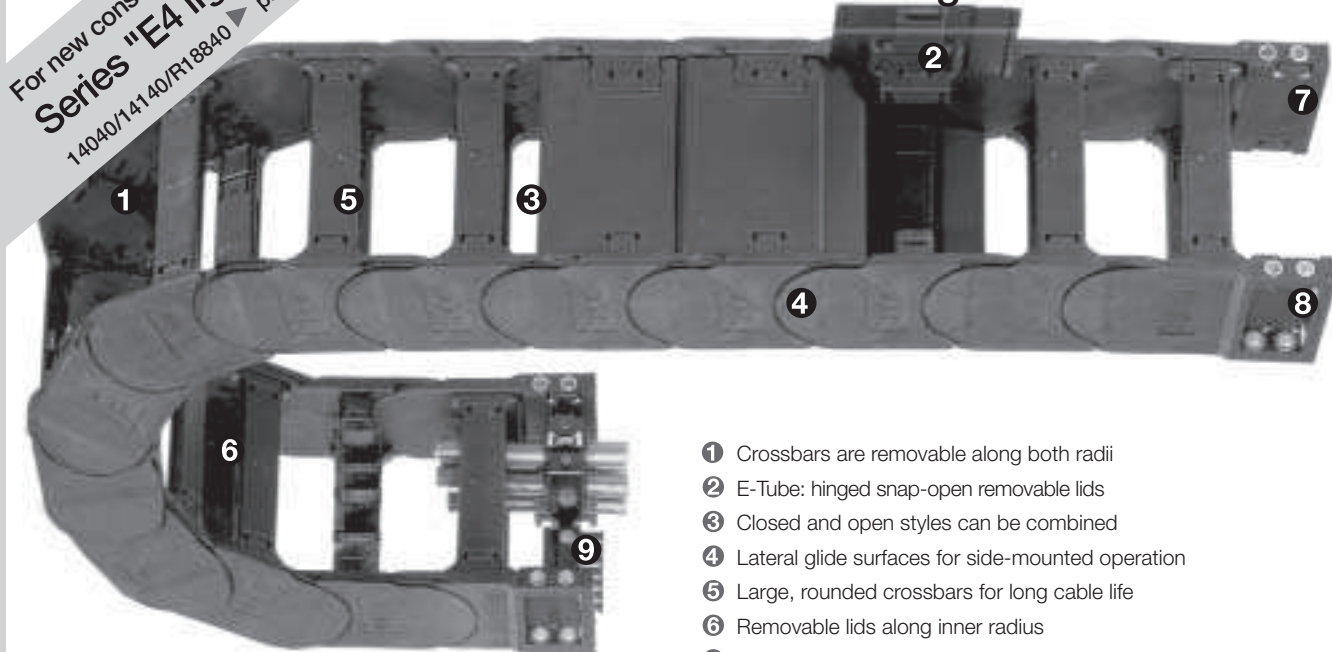


- ❶ Crossbars are removable along both radii
- ❷ E-Tube: hinged snap-open removable lids
- ❸ Closed and open styles can be combined
- ❹ Lateral glide surfaces for side-mounted operation
- ❺ Large, rounded crossbars for long cable life
- ❻ Removable lids along inner radius
- ❼ Mounting brackets available both locking and pivoting
- ❽ KMA mounting brackets with attachment points on all sides
- ❾ Integrated strain relief possible

Price index



Phone +49- (0) 22 03-96 49-800
Fax +49- (0) 22 03-96 49-222


igus® GmbH
51147 Cologne

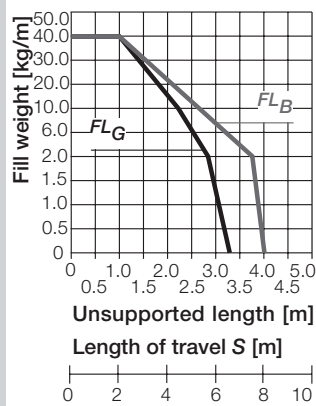

Unsupported length

FL_G = with straight upper run


FL_B = with permitted sag

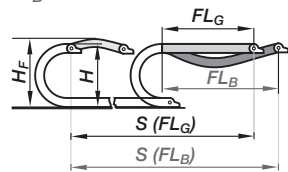


Series 140 crossbars every link



Series 141 crossbars every 2nd link

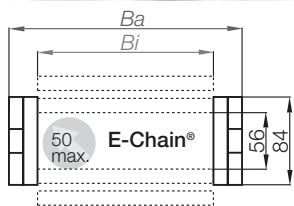

Series R188 fully enclosed E-Tube

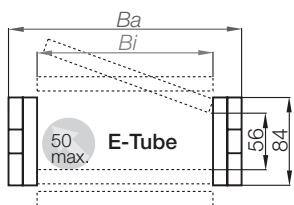

Part No.	Bi [mm]	Ba [mm]	R [mm] Bending Radii
140/141.05.	0	50	76
140/141.06.	0	65	91
140/141/188.07.	0*	75	101
140/141/188.10.	0	100	126
140/141.11.	0	112	139
140/141/188.12.	0	125	151
140/141.13.	0	137	164
140/141/188.15.	0	150	176
140/141.16.	0	162	189
140/141.17.	0	175	201
140/141.18.	0	187	214
140/141/188.20.	0	200	226
140/141.21.	0	212	239
140/141.22.	0	225	251
140/141.23.	0	237	264
140/141/188.25.	0	250	276
140/141.26.	0	262	289
140/141.27.	0	275	301
140/141.28.	0	287	314
140/141/188.30.	0	300	326
140/141.31.	0	312	339
140/141.32.	0	325	351
140/141.33.	0	337	364
140/141/188.35.	0	350	376
140/141.36.	0	362	389
140/141.37.	0	375	401
140/141.38.	0	387	414
140/141/188.40.	0	400	426
140/141.41.	0	412	439
140/141.42.	0	425	451
140/141.43.	0	437	464
140/141.45.	0	450	476
140/141/188.46.	0	462	489
140/141.47.	0	475	501
140/141.48.	0	487	514
140/141.50.	0	500	526
140/141.51.	0	512	539
140/141.52.	0	525	551
140/141.53.	0	537	564
140/141.55.	0	550	576
140/141.60.	0	600	626

Radii for all widths!

* Removable lid only, no hinged option
** Not available for R188

Part No. structure

140. 30. 300. 0

Color black
Bending radius
Width
Series

Order example 5,0 m complete E-Chain®
(indicate chain-lengths or number of links)

5,0 m (55 links) **Series 140.30.300.0**

+ 2 separators **411** assembled each 2nd link

+ 1 set mounting brackets with C-profile **1410.30.12.B.C**

Supplement Part No. with required radius. Example: 140.30.300.0
Bending radii listed above can be combined with every tube width!